



(43) International Publication Date
26 September 2013 (26.09.2013)

(51) International Patent Classification:

B65F 5/00 (2006.01) F24F 7/04 (2006.01)
F04C 29/00 (2006.01)

(21) International Application Number:

PCT/FI2013/050254

(22) International Filing Date:

7 March 2013 (07.03.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20125315 21 March 2012 (21.03.2012) FI

(71) Applicant: MARICAP OY [FI/FI]; Pohjantähdentie 17,
FI-01450 Vantaa (FI).

(72) Inventor: SUNDHOLM, Göran; Ilmari Kiannon kuja 3,
FI-04310 Tuusula (FI).


(74) Agent: HEINÄNEN OY; Äyritie 8 D, FI-01510 Vantaa
(FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR TREATING THE OUTLET AIR OF A PNEUMATIC WASTE CONVEYING SYSTEM

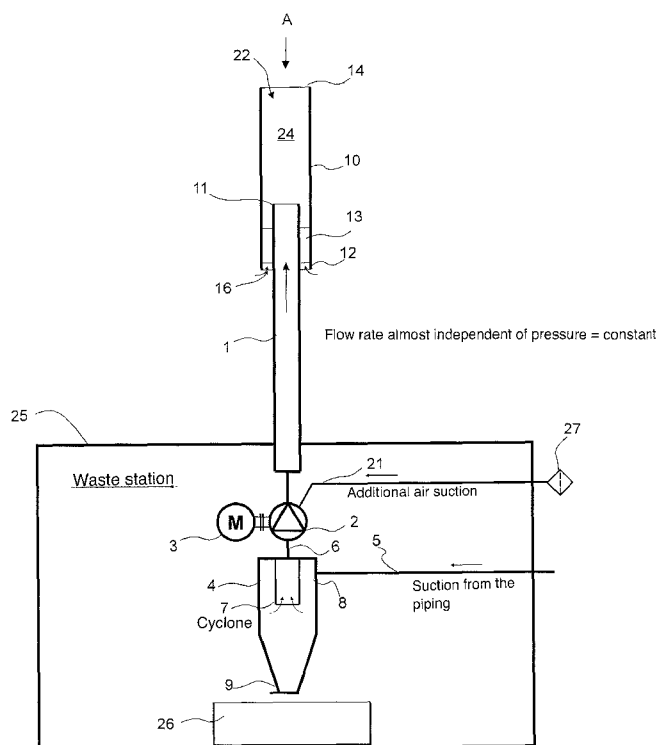

(57) Abstract: Method for treating outlet air in a pneumatic waste conveying system, in which the outlet air is at least partly the conveying air to be used in waste conveying. In the method in a first phase additional air is brought into the body of conveying air in the partial-vacuum generator (2) of the pneumatic waste conveying system before the output aperture (35) of the partial-vacuum generator, and that in the method in a second phase additional air is brought into the body of outlet air as a consequence of the suction effect brought about by the outlet air in such a way that the outlet air and the additional air mix with each other at least partly. The invention also relates to an apparatus.

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*