



(51) International Patent Classification:
G01F 1/84 (2006.01)

(21) International Application Number:
PCT/US2021/025562

(22) International Filing Date:
02 April 2021 (02.04.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/061,903 06 August 2020 (06.08.2020) US

(71) Applicant: MICRO MOTION, INC. [US/US]; 7070 Winchester Circle, Boulder, Colorado 80301 (US).

(72) Inventors: LUPIENSKI, Mark; 1870 Shamrock Dr., Superior, Colorado 80027 (US). NIELSON, Jeffrey; 1501 Stones Peak Drive, Longmont, Colorado 80503 (US).

(74) Agent: COSTA, David et al.; THE OLLILA LAW GROUP LLC, 2569 Park Lane, Suite 202, Lafayette, Colorado 80026 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: TRANSDUCER FOR A VIBRATING FLUID METER

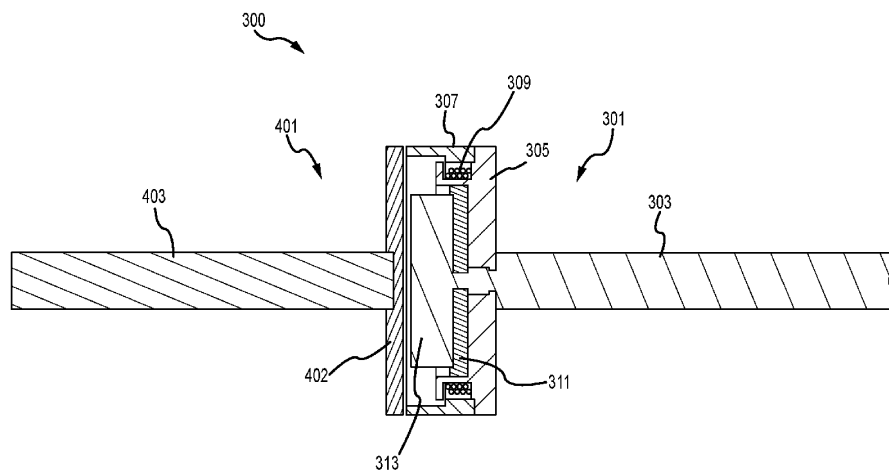


FIG.5

(57) Abstract: A transducer assembly (300) for a vibrating meter having meter electronics (20) is provided. The transducer assembly (300) comprises a keeper portion (401) comprising a keeper plate (402). A magnet portion (301) comprises a coil bobbin (305) and a coil (309) wound around the coil bobbin (305). A magnet (313) is coupled to the coil bobbin (305). The keeper plate (402) is prevented from contacting the coil bobbin (305).

[Continued on next page]

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*