

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number
WO 2005/000668 A1

(51) International Patent Classification⁷: **B63B 3/48, 25/20**

(74) Agent: **CEGUMARK AB**; P.O. Box 53047, S-400 14
Göteborg (SE).

(21) International Application Number:

PCT/SE2004/000595

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 19 April 2004 (19.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0301430-5 16 May 2003 (16.05.2003) SE

(71) Applicant (for all designated States except US): **TTS
Ships Equipment AB** [SE/SE]; Kämpegatan 3, S-411 04
Göteborg (SE).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SALÉN, Hans**
[SE/SE]; Haggårdsvägen, Pl. 1064, S-430 85 Brännö (SE).

[Continued on next page]

(54) Title: **DEVICE AT CARDECK FOR VEHICLES ON SHIPS**

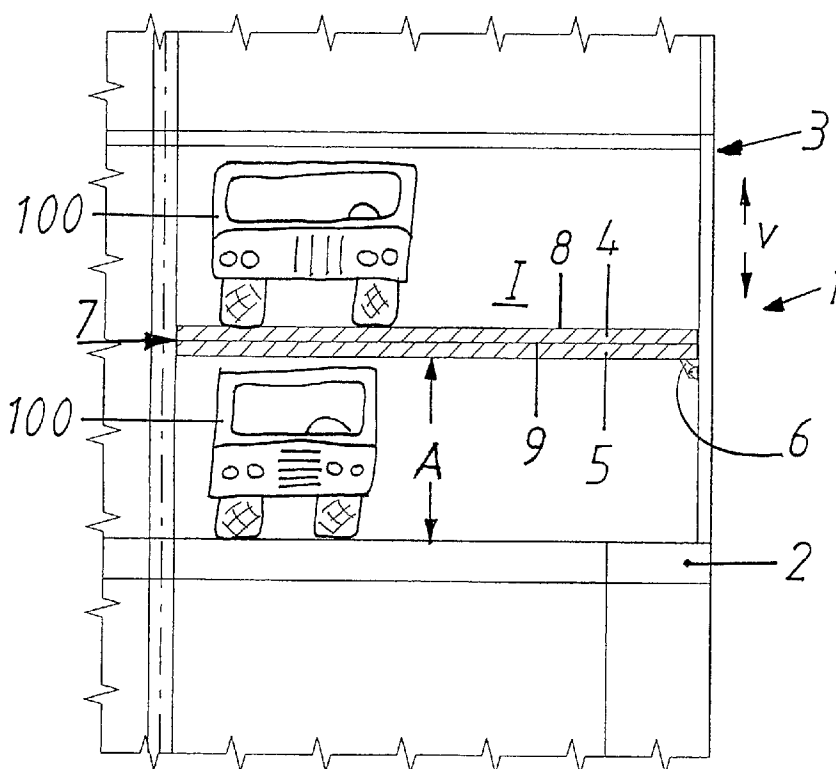

(57) Abstract: The present invention relates to an arrangement (1) for cargo decks (2) for vehicles (100) on ships (3) comprising a number of hoistable deck sections (4, 5) that are so arranged as to be locked respectively in a position in which they are vertically moved apart and in a position in which they are vertically moved together by means of locking devices (6) with the ability to be disengaged. In accordance with the invention, pairs of hoistable deck sections (4, 5) are so arranged as to be capable of being accommodated packed closely together with one deck section (4) resting on the subjacent hoistable deck section (5). The aforementioned closely packed deck sections (4, 5) interact with one another in this way. The strength is increased whereas the bending flexure of the common deck unit (7) formed in this way is reduced.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*