



(51) International Patent Classification:

B65G 15/34 (2006.01) *B07C 3/08* (2006.01)
B65H 29/12 (2006.01) *B29D 29/00* (2006.01)
B65H 5/02 (2006.01) *B29C 44/00* (2006.01)

(21) International Application Number:

PCT/EP2014/065618

(22) International Filing Date:

21 July 2014 (21.07.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13177672.6 23 July 2013 (23.07.2013) EP

(71) Applicant: **HABASIT AG** [CH/CH]; Römerstrasse 1, CH-4153 Reinach (CH).

(72) Inventors: **JOSSEROND, Eric**; 30 rue de Paris, F-68128 Village-Neuf (FR). **SIEBEN, Gregor**; Mattweg 88, CH-4144 Arlesheim (CH). **GSPONER, Urs**; Im Mätteli 1, CH-4333 Münchwilen (CH). **ROLLE, Felix**; Allschwilerweg 56, CH-4102 Binningen (CH).

(74) Agent: **BOHEST AG**; Holbeinstrasse 36-38, CH-4051 Basel (CH).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ABRASION-RESISTANT BELT

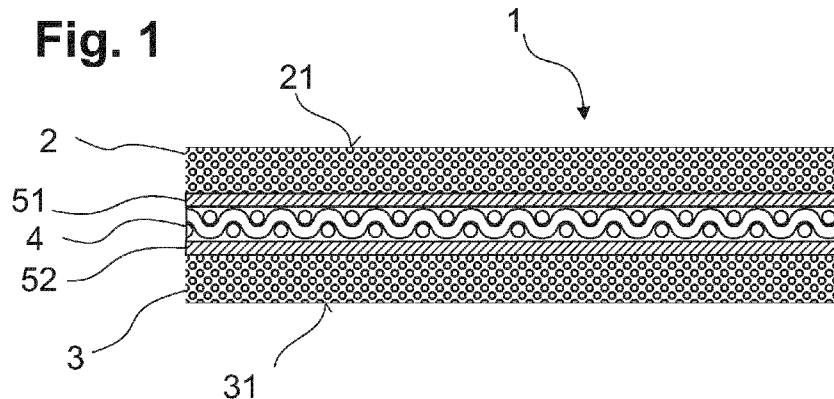

(57) Abstract: A belt (1) comprising a first cover layer (2) with a first top surface (21) and preferably also a second cover layer (3) with a second top surface (31), wherein the first cover layer (2) and, if present, the second cover layer (3) consist of a foam comprising a thermoplastic or thermoplastic elastomer, in particular a TPU or PEBA. The belt is suitable e.g. as a machine tape in mail sorting machines and for power transmission.