



(51) International Patent Classification:
B29D 11/00 (2006.01) **B29C 71/00** (2006.01)
B29C 33/10 (2006.01)

(21) International Application Number:
PCT/EP2010/069938

(22) International Filing Date:
16 December 2010 (16.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/287,265 17 December 2009 (17.12.2009) US

(71) Applicant (for all designated States except US): **NO-VARTIS AG** [CH/CH]; Lichtstrasse 35, CH-4056 Basel (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HEINRICH, Axel** [DE/DE]; Beethovenstrasse 53b, 63743 Aschaffenburg (DE). **SEIFERLING, Bernhard** [DE/DE]; Dr. Wohlfahrt Strasse 6, 63773 Goldbach (DE). **HAGMANN, Peter** [DE/DE]; Justin-Kirchgässner-Strasse 2, 63906 Erlenbach am Main (DE).

(74) Agent: **BOHEST AG**; P.O. Box 160, CH-4003 Basel (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF SEPARATING EXCESS LENS FORMING MATERIAL FROM A MOLDED OPHTHALMIC LENS, IN PARTICULAR A CONTACT LENS

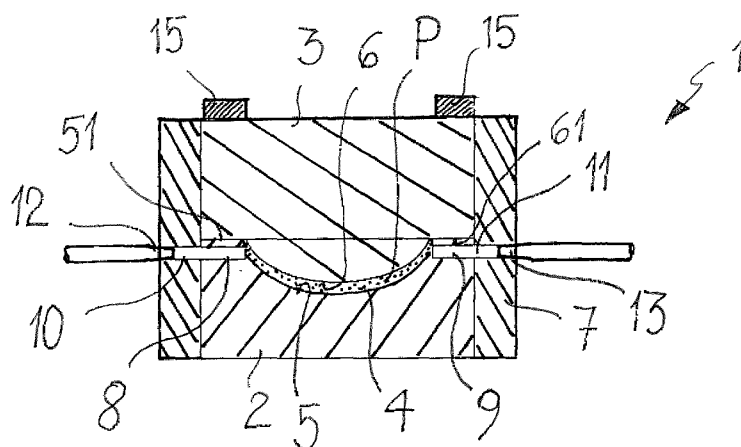


Fig. 1

(57) Abstract: There is described a method of separating excess lens forming material from a molded ophthalmic lens, in particular a contact lens. After polymerization and/or cross-linking of a lens forming material (P) within a mold cavity (4) of a mold (1) comprising female and male mold halves (2, 3) to form an ophthalmic lens non-polymerized and/or non-cross-linked lens forming material is flushed away from the mold halves (2, 3) with a jet of a fluid flushing medium, such as, e.g., water or a solvent or an inert gas. Subsequently the molded lens is dried. In accordance with the invention the flushing is accomplished with the mold halves (2, 3) still in the closed position. There is also described an apparatus for carrying out the method.