



(51) International Patent Classification:

B08B 1/04 (2006.01) **B63B 59/06** (2006.01)
B08B 1/00 (2006.01) **B63B 59/08** (2006.01)

(21) International Application Number:

PCT/SG2010/000018

(22) International Filing Date:

22 January 2010 (22.01.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(72) Inventor; and

(71) Applicant : **ARCHIBALD, John Robert** [GB/SG]; 6C
Lewis Road, Singapore 258591 (SG).

(74) Agent: **SCHIWECK, Wolfram**; Viering, Jentschura &
Partner LLP, P.O. Box 1088, Rochor Road, Singapore
911833 (SG).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MARINE GROWTH REMOVAL DEVICE

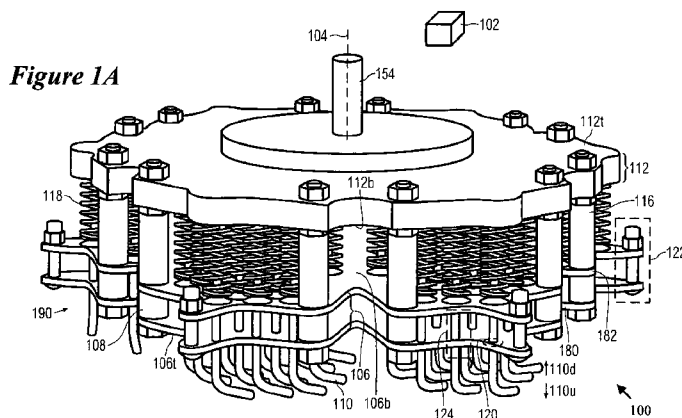

(57) Abstract: According to embodiments of the invention, there is provided a marine growth removal device, adapted to be mounted to a drive motor which allows the marine growth removal device to be rotatable about an axis, the marine growth removal device including: a base structure having a top surface; and a plurality of rigid stripping elements rotatably mounted to the base structure, wherein a stripping portion of the plurality of rigid stripping elements passes through the base structure to extend from the top surface of the base structure.