

UNDERFILL ENCAPSULANT COMPOSITIONS
FOR USE IN ELECTRONIC DEVICES

5 This invention was made with Government support under Prime Contract No. F33615-96-C-5117 awarded by the United States Air Force. The Government has certain rights in this invention.

 This invention relates to underfill encapsulant compositions that are suitable for use as underfill encapsulants to protect and reinforce the interconnections between an
10 electronic component and a substrate in a microelectronic device.

 Microelectronic devices contain millions of electrical circuit components, mainly transistors assembled in integrated circuit (IC) chips, but also resistors, capacitors, and other components. These electronic components are interconnected to form the circuits, and eventually are connected to and supported on a carrier or substrate, such as a printed
15 wire board.

 The integrated circuit component may comprise a single bare chip, a single encapsulated chip, or an encapsulated package of multiple chips. The single bare chip can be attached to a lead frame, which in turn is encapsulated and attached to the printed wire board, or it can be directly attached to the printed wire board.

20 Whether the component is a bare chip connected to a lead frame, or a package connected to a printed wire board or other substrate, the connections are made between electrical terminations on the electronic component and corresponding electrical terminations on the substrate. One method for making these connections uses metallic or polymeric material that is applied in bumps to the component or substrate terminals. The
25 terminals are aligned and contacted together and the resulting assembly heated to reflow the metallic or polymeric material and solidify the connection.

 During subsequent manufacturing steps, the electronic assembly is subjected to cycles of elevated and lowered temperatures. Due to the differences in the coefficient of thermal expansion for the electronic component, the interconnect material, and the
30 substrate, this thermal cycling can stress the components of the assembly and cause it to fail. To prevent failure, the gap between the component and the substrate is filled with a polymeric encapsulant, hereinafter called underfill or underfill encapsulant, to reinforce the interconnect and to absorb some of the stress of the thermal cycling.

9902967-0
18 JUN 1999

This Sheet Has Been Replaced




Two prominent uses for underfill technology are in packages known in the industry as flip-chip, in which a chip is attached to a lead frame, and ball grid array, in which a package of one or more chips is attached to a printed wire board.

The underfill encapsulation may take place after the reflow of the metallic or polymeric interconnect, or it may take place simultaneously with the reflow. If underfill encapsulation takes place after reflow of the interconnect, a measured amount of underfill encapsulant material will be dispensed along one or more peripheral sides of the electronic assembly and capillary action within the component-to-substrate gap draws the material inward. The substrate may be preheated if needed to achieve the desired level of encapsulant viscosity for the optimum capillary action. After the gap is filled, additional underfill encapsulant may be dispensed along the complete assembly periphery to help reduce stress concentrations and prolong the fatigue life of the assembled structure. The underfill encapsulant is subsequently cured to reach its optimized final properties.

If underfill encapsulation is to take place simultaneously with reflow of the solder or polymeric interconnects, the underfill encapsulant, which can include a fluxing agent if solder is the interconnect material, first is applied to either the substrate or the component; then terminals on the component and substrate are aligned and contacted and the assembly heated to reflow the metallic or polymeric interconnect material. During this heating process, curing of the underfill encapsulant occurs simultaneously with reflow of the metallic or polymeric interconnect material.

For single chip packaging involving high volume commodity products, a failed chip can be discarded without significant loss. However, it becomes expensive to discard multi-chip packages with only one failed chip and the ability to rework the failed component would be a manufacturing advantage. Today, one of the primary thrusts within the semiconductor industry is to develop not only an underfill encapsulant that will meet all the requirements for reinforcement of the interconnect, but also an underfill encapsulant that will be reworkable, allowing for the failed component to be removed without destroying the substrate.

Conventional underfill technology uses low viscosity thermosetting organic materials, the most widely used being epoxy/anhydride systems. In order to achieve the



required mechanical performance, relatively high molecular weight thermoplastics would be the preferred compositions for underfill materials. These materials, however, have high viscosity or even solid film form, which are drawbacks to the manufacturing process. Therefore, there is a need for new encapsulant compositions that are easily dispensable
5 to conform with automated manufacturing processes, and that are reworkable.

This invention is a curable underfill encapsulant composition that comprises one or more compounds containing one or more maleimide functionality, or one or more compounds containing one or more vinyl functionality, or a combination of compounds containing maleimide or vinyl functionality, a free-radical initiator and/or a photoinitiator,
10 and optionally one or more fillers.

A compound containing one maleimide functionality will be referred to hereinafter as a mono-functional maleimide compound. A compound containing more than one maleimide functionality will be referred to hereinafter as a poly-functional maleimide compound. A compound containing one vinyl functionality will be referred to hereinafter
15 as a mono-functional vinyl compound. A compound containing more than one vinyl functionality will be referred to hereinafter as a poly-functional vinyl compound. The functionality is defined herein to be a carbon to carbon double bond.

The composition can be designed to be reworkable by choosing a major amount of mono-functional compounds for the composition.

20 The ability to process these compositions for underfill encapsulants is achieved by using relatively low molecular weight reactive oligomers or pre-polymers and curing them *in situ* after application to the electronic assembly. The relatively low molecular weight translates to a lower viscosity and ease of application to the substrate.

In another embodiment, this invention is a cured encapsulant composition that
25 results after the curing of the just described curable underfill encapsulant composition.

In another embodiment, this invention is an electronic assembly comprising an electronic component having a plurality of electrical terminations, each termination electrically and mechanically connected by a metallic or polymeric material (the metallic or polymeric material also referred to herein as interconnect or interconnect material) to a
30 substrate having a plurality of electrical terminations corresponding to the terminations of



the electrical component, and an encapsulant disposed and then cured between the electrical component and the substrate to reinforce the solder or polymeric interconnects, in which the cured underfill encapsulant was prepared from a composition comprising one or more mono- or polyfunctional maleimide compounds, or one or more mono- or polyfunctional vinyl compounds other than maleimide compounds, or a combination of maleimide and vinyl compounds, a free radical curing agent and/or a photoinitiator, and optionally, one or more fillers.

The maleimide and vinyl compounds used in the underfill encapsulant compositions of this invention are curable compounds, meaning that they are capable of polymerization, with or without crosslinking. As used in this specification, to cure will mean to polymerize, with or without crosslinking. Cross-linking, as is understood in the art, is the attachment of two polymer chains by bridges of an element, a molecular group, or a compound, and in general will take place upon heating. As cross-linking density is increased, the properties of a material can be changed from thermoplastic to thermosetting, which consequently increases polymeric strength, heat-and electrical resistance, and resistance to solvents and other chemicals.

It is possible to prepare polymers of a wide range of cross-link density, from tacky, elastomeric to tough glassy polymers, by the judicious choice and amount of mono- or polyfunctional compounds. The greater proportion of polyfunctional compounds reacted, the greater the cross-link density. If thermoplastic properties are desired, the underfill encapsulants of this invention can be prepared from mono-functional compounds to limit the cross-link density. However, a minor amount of poly-functional compounds can be added to provide some cross-linking and strength to the composition, provided the amount of poly-functional compounds is limited to an amount that does not diminish the desired thermoplastic properties. Within these parameters, the strength and elasticity of individual underfill encapsulants can be tailored to a particular end-use application.

The cross-link density can also be controlled to give a wide range of glass transition temperatures in the cured underfill to withstand subsequent processing and operation temperatures. For those underfill encapsulants that are designed to be reworkable, the T_g is chosen to be below the reflow temperature of the metallic or



polymeric interconnect. If the underfill is added after the reflow of the interconnect material, the low Tg will allow the encapsulant material to soften and adhere to both the electronic component and the substrate without affecting the interconnect.

If the underfill is added before the reflow, the same effect is achieved. The underfill encapsulant will soften and adhere to the electronic component and substrate during the reflow of the interconnect material. Intimate contact is maintained with the interconnect after the interconnect solidifies, imparting good stress transfer and long-term reliability.

In those cases where it is necessary to rework the assembly, the electronic component can be pried off the substrate, and any residue underfill can be heated until it softens and is easily removed.

In the inventive underfill encapsulant compositions, the maleimide compounds and the vinyl compounds may be used independently, or in combination. The maleimide or vinyl compounds, or both, will be present in the curable underfill encapsulant compositions in an amount from 2 to 98 weight percent based on the organic components present (excluding any fillers).

The underfill encapsulant compositions will further comprise at least one free-radical initiator, which is defined to be a chemical species that decomposes to a molecular fragment having one or more unpaired electrons, highly reactive and usually short-lived, which is capable of initiating a chemical reaction by means of a chain mechanism. The free-radical initiator will be present in an amount of 0.1 to 10 percent, preferably 0.1 to 3.0 percent, by weight of the maleimide or vinyl compound, or a combination of both maleimide and vinyl compounds (excluding any filler). The free radical curing mechanism gives a fast cure and provides the composition with a long shelf life before cure. Preferred free-radical initiators include peroxides, such as butyl peroctoates and dicumyl peroxide, and azo compounds, such as 2,2'-azobis(2-methyl-propanenitrile) and 2,2'-azobis(2-methyl-butanenitrile).

Alternatively, the underfill encapsulant compositions may contain a photoinitiator in lieu of the free-radical initiator, and the curing process may then be initiated by UV radiation. The photoinitiator will be present in an amount of 0.1 to 10 percent, preferably



0.1 to 3.0 percent, by weight of the maleimide or vinyl compound, or a combination of both maleimide and vinyl compounds (excluding any filler). In some cases, both photoinitiation and free-radical initiation may be desirable. For example, the curing process can be started by UV irradiation, and in a later processing step, curing can be completed by the application of heat to accomplish a free-radical cure.

In general, these compositions will cure within a temperature range of 80° to 180°C, and curing will be effected within a length of time of 5 minutes to 4 hours. As will be understood, the time and temperature curing profile for each encapsulant composition will vary, and different compositions can be designed to provide the curing profile that will be suited to the particular industrial manufacturing process.

Ease of application, even when thermoplastic properties are desired for the underfill encapsulant, is achieved by using relatively low molecular weight reactive oligomers or pre-polymers and curing these *in situ* after application to the electronic assembly of component and substrate. Applying the materials in an uncured state gives high processibility, and the resultant cured thermoplastic encapsulant provides high mechanical performance.

For some underfill operations, inert inorganic fillers are used in the underfill encapsulant to adjust the coefficient of thermal expansion to more closely mirror that of the circuit interconnect, and to mechanically reinforce the interconnect. Examples of suitable thermally conductive fillers include silica, graphite, aluminum nitride, silicon carbide, boron nitride, diamond dust, and clays. The fillers will be present typically in an amount of 20-80 percent by weight of the total underfill encapsulant composition.

As used throughout this specification: the notation C(O) refers to a carbonyl group.

Maleimide Compounds


The maleimide compounds suitable for use in the underfill encapsulant compositions of this invention have a structure represented by the formula:

$[M-X]_n - Q$, or by the formula: $[M-Z]_n - K$. For these specific formulae, when lower case "n" is the integer 1, the compound will be a mono-functional compound; and when lower case "n" is an integer 2 to 6, the compound will be a poly-functional compound.



Formula $[M-X]_n - Q$ represents those compounds in which:

M is a maleimide moiety having the structure




in which R^1 is H or C_1 to C_5 alkyl;


each X independently is an aromatic group selected from the aromatic groups

5 having the structures (I) through (V):


(I)




(II)




(III)



(IV)




(V)



10

and Q is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or
15 unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the backbone in the chain, and in which any heteroatom present may or may not be directly attached to X;

or Q is a urethane having the structure:




20 in which each R^2 independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50;

or Q is an ester having the structure:

This Sheet Has Been Replaced





in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents;

or Q is a siloxane having the structure:

- 5 $-(CR^1_2)_e-[SiR^4-O]_f-SiR^4_2-(CR^1_2)_g-$ in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10 and f is 1 to 50; and


m is 0 or 1, and n is 1 to 6.

- 10 Preferably, X is structure (II), (III), (IV) or (V), and more preferably is structure (II).

Preferably, Q is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up to about 100 atoms in the chain, as described with pendant saturated or unsaturated cyclic or heterocyclic substituents, or a siloxane as described, and more preferably is a linear or branched chain alkyl species or siloxane, as described.

- 15 Formula $[M-Z]_n-K$ represents those compounds in which

M is a maleimide moiety having the structure




in which R¹ is H or C₁ to C₅ alkyl;

Z is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having

- 20 up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the backbone in the chain, and in which any heteroatom present may or may not be directly attached to K;

or Z is a urethane having the structure:




This Sheet Has Been Replaced




in which each R^2 independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50;

or Z is an ester having the structure:




in which R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents;

or Z is a siloxane having the structure:

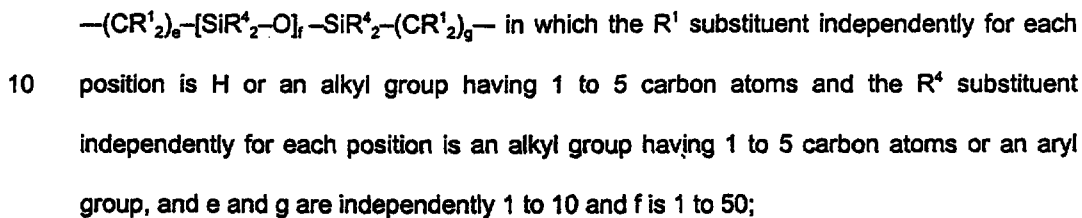


K is an aromatic group selected from the aromatic groups having the structures (VI) through (XIII) (although only one bond may be shown to represent connection to the aromatic group K, this will be deemed to represent any number of additional bonds as described and defined by n):

(VI)




(VII)



in which p is 1 to 100;


(VIII)



20

in which p is 1 to 100;


(IX)



This Sheet Has Been Replaced




(X)




in which R^5 , R^6 , and R^7 are a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the backbone in the chain, and in which any heteroatom present may or may not be directly attached to the aromatic ring; or R^5 , R^6 , and R^7 are a siloxane having the structure $-(CR^1_2)_e-[SiR^4_2-O]_f-SiR^4_2-(CH_3)_g-$ in which the R^1 substituent is H or an alkyl group having 1 to 5 carbon atoms and the R^4 substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e is 1 to 10 and f is 0 to 50;

(XI)




(XII)



15

and (XIII)



and m is 0 or 1, and n is 1 to 6.

Preferably, Z is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up to about 100 atoms in the chain, as described with pendant

20




saturated or unsaturated cyclic or heterocyclic substituents, or a siloxane as described, and more preferably is a linear or branched chain alkyl species or siloxane, as described.

Preferably, K is structure (VIII), (X) or (XI), more preferably is structure (X) or (XI), and most preferably is structure (X).

- 5 The more preferred maleimide compounds, particularly for use as reworkable encapsulants, are N-butylphenyl maleimide and N-ethylphenyl maleimide.

Vinyl Compounds

The vinyl compounds (other than the maleimides) herein will have the structure:



For these specific structures, when lower case "n" is the integer 1, the compound will be a mono-functional compound; and when lower case "n" is an integer 2 to 6, the compound will be a poly-functional compound.

- 15 In these structures, R¹ and R² are H or an alkyl having 1 to 5 carbon atoms, or together form a 5 to 9 membered ring with the carbons forming the vinyl group; B is C, S, N, O, C(O), O-C(O), C(O)-O, C(O)NH or C(O)N(R⁸), in which R⁸ is C₁ to C₅ alkyl; m is 0 or 1; n is 1-6; and X, Q, Z, and K are as described above.

- 20 Preferably, B is O, C(O), O-C(O), C(O)-O, C(O)NH or C(O)N(R⁸); more preferably B is O, C(O), O-C(O), C(O)-O, or C(O)N(R⁸).


Other Composition Components

- 25 Depending on the nature of the substrate, the underfill encapsulant may also contain a coupling agent. A coupling agent as used herein is a chemical species containing a polymerizable functional group for reaction with the maleimide and other vinyl compound, and a functional group capable of condensing with metal hydroxides present on the surface of the substrate. Such coupling agents and the preferred amounts for use in compositions for particular substrates are known in the art. Suitable coupling agents



EXAMPLE 1

Preparation of Benzamido-endcapped Dimer Diamine Bismaleimide

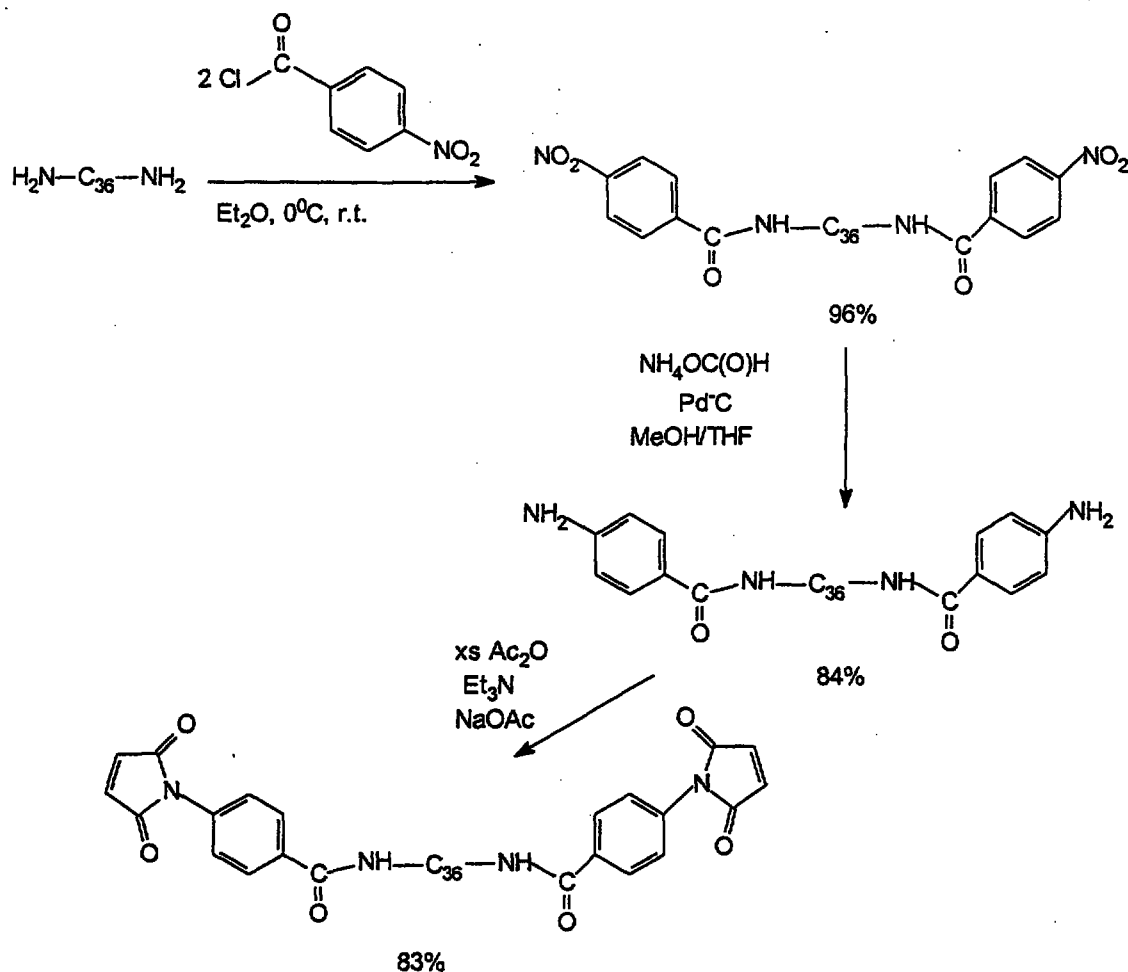

- 5 Dimer diamine (sold as Versamine 552 by Henkel, 20.0 g, 37 mmol) was solvated in diethyl ether (Et_2O) (200 mL) in a 500 mL three-necked flask equipped with an addition funnel, magnetic stirring, internal temperature probe and nitrogen inlet/outlet. NaOH_{aq} (11.7 mL of 6.25 M solution diluted with 100 mL H_2O , 73 mmol) was added with vigorous
- 10 stirring. This solution was placed under a steady flow of nitrogen and cooled to 3°C on an ice bath with stirring. The addition funnel was charged with *p*-nitrobenzoyl chloride (13.6 g, 73 mmol) in Et_2O (50 mL), and this solution was added to the reaction vessel over the course of 60 minutes, maintaining an internal $T < 10^\circ\text{C}$. The reaction was stirred at -3°C for an additional 60 minutes after this addition was complete, then allowed to warm to
- 15 room temperature and stirred for another 4 hours. The solution was transferred to a separatory funnel and the isolated organic layer washed with distilled H_2O (300 mL), 5%



HCl_{aq} (300 mL), NaCl_{aq} (250 mL) and distilled H₂O (2x250 mL). The organics were isolated, dried over MgSO₄ anhyd., filtered and the solvent removed *in vacuo* to yield the dinitro compound as a viscous yellow oil which exhibited acceptable ¹H NMR and IR spectra (30.0 g, 96 %).

5 The dinitro compound described above (5.0 g, 5.9 mmol) was dissolved in methanol (MeOH) (25 mL) and tetrahydrofuran (THF) (5 mL) in a 250 mL three-necked flask equipped with magnetic stirring, reflux condensor and nitrogen inlet/outlet. The solution was placed under nitrogen, and 5% Pd-C (0.96 g) were added with stirring. Ammonium formate (3.4 g, 55 mmol) was added and the reaction stirred at room
10 temperature for 2 hours. Carbon dioxide evolution was immediately observed. The reaction solution was filtered, and bulk filtrate solvent was removed *via* rotary evaporator. The resulting viscous oil was dissolved in Et₂O (150 mL), washed with distilled H₂O (150 mL), isolated and dried over MgSO₄ anhyd. Solvent was removed *in vacuo* to yield the diamine as a sticky tan oil, which exhibited acceptable ¹H NMR and IR spectra (3.9 g,
15 84%).

Maleic anhydride (0.5 g, 5.1 mmol) was dissolved in acetone (10 mL) in a 250 mL three-necked flask equipped with magnetic stirring, addition funnel and nitrogen inlet/outlet. The solution was cooled on an ice bath and placed under nitrogen. The addition funnel was charged with an acetone (10mL) solution of the diamine described
20 above (2.0 g, 2.60 mmol), which was added dropwise over 30 minutes. The reaction was stirred for an additional 30 minutes on the ice bath, then allowed to warm to room temperature, and stirred for another 4 hours. To the resulting slurry was added acetic anhydride (Ac₂O) (1.54 mL, 160 mmol), triethyl amine (Et₃N) (0.23 mL, 1.63 mmol) and sodium acetate (NaOAc) (0.16 g, 1.9 mmol). The resulting slurry was heated to mild
25 reflux for 5 hours. The reaction was allowed to cool to room temperature, and solvent removed *via* rotary evaporator to yield a brown oil. This material was dissolved in CH₂Cl₂ (250 mL) and washed with distilled H₂O (200mL), satd. NaHCO₃ (200 mL) and distilled H₂O (200 mL). Emulsions were broken by adding NaCl when necessary. The organic layer was isolated, dried over MgSO₄ anhyd. and solvent removed *in vacuo* to yield the


This Sheet Has Been Replaced



bismaleimide, a brown solid (2.0 g, 83%). The resin exhibited satisfactory ^1H NMR, ^{13}C NMR and IR spectra, which indicated slight contamination with acetic acid.

EXAMPLE 2

5 Preparation of 20-Bismaleimido-10,11-dioctyl-eicosame (and isomers)

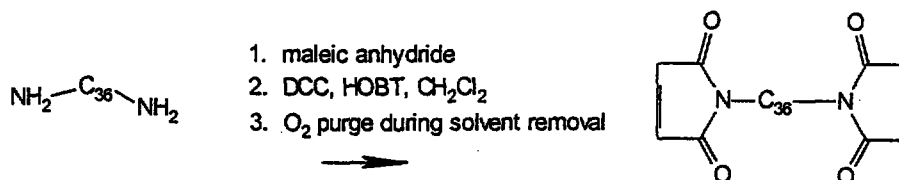

In a 5 L multi-neck flask equipped with a drying tube, thermometer, slow addition funnel, mechanical stirrer and nitrogen purge maleic anhydride (98.06 g, 1.02 equivalents on $-\text{NH}_2$) was dissolved in 500 ml tetrahydrofuran (THF). Stirring was begun and the solution was chilled with a dry ice/water bath. Slow addition of dimer diamine (Versamine 552, Henkel, 245.03 g, 0.4477 mol) in 250 ml THF was begun. Addition was carried out over 1 hour. After addition was complete the ice bath was removed and 375 ml of THF was rinsed through the slow addition funnel to incorporate solidified diamine. After one hour the ice bath was replaced around the flask. 1-Hydroxybenzotriazole (96.79 g, 0.80 equivalents on $-\text{NH}_2$) was added rinsing into the flask with 50ml THF. When the temperature had reached 5°C slow addition of dicyclohexylcarbodiimide (DCC) (188.43 g, 1.02 equivalents on $-\text{NH}_2$) in 200ml THF was begun. The temperature during addition was kept below ten degrees. After DCC addition was complete the slow addition funnel was rinsed with 80 ml of THF. The ice bath was removed. The reaction was monitored by IR. When it appeared that the isoimide has been converted to maleimide (approximately 4 hours after the completion of DCC addition) the mixture was filtered, rinsing the solids with THF. The orange solution was placed in the freezer overnight.

The solution was removed from the freezer and allowed to warm to room temperature. Hydroquinone (0.0513 g) was added to the solution. A partial strip of the THF was carried out on a rotary evaporator with the temperature maintained below 28°C . The solution was concentrated to approximately 800 ml. Much particulate matter was visible. The solution was placed in freezer overnight.



The mixture was removed from the freezer and allowed to warm. The solids were filtered, rinsing with THF. The filtrate was transferred to a 2 L multi-neck flask equipped with a mechanical stirrer, vacuum line connected to a trap, and a glass tube attached by tubing to a drying tube. The remaining THF was stripped at room temperature by pulling a vacuum and bubbling air through the material while stirring. The resultant thick, creamy-tan colored semi-solid was placed in the freezer overnight.

The semi-solid was removed from the freezer and allowed to warm. The semi-solid was dissolved in 450 ml each of methanol and hexane, and washed with 50% methanol/water (4 x 250 ml) to remove 1-hydroxybenzotriazole (HOBT). It was attempted to extract the product with hexane. After addition of 300 ml of hexane separation was not observed. The mixture was washed with additional water (3 x 250 ml). The organic phase was placed in the freezer overnight.


The material was removed from the freezer. Two layers were apparent. The upper layer was clear and yellow in color. The bottom layer was a orange and cloudy. The material was poured cold into a separatory funnel. The top layer was hexane and the desired product. The bottom layer was extracted with hexane (6 x 200 ml), separation occurred easily. The combined extracts were dried over anhydrous magnesium sulfate and filtered, rinsing the solids with hexane. The solvent was stripped to an approximate volume of 750 ml on a rotary evaporator with the temperature not exceeding 24°C. The remaining solvent was stripped off using a vacuum/air bubbling set-up at room temperature to give the desired product in 67% yield.

This Sheet Has Been Replaced



EXAMPLE 3

Preparation of Butadiene-Acrylonitrile Bismaleimide

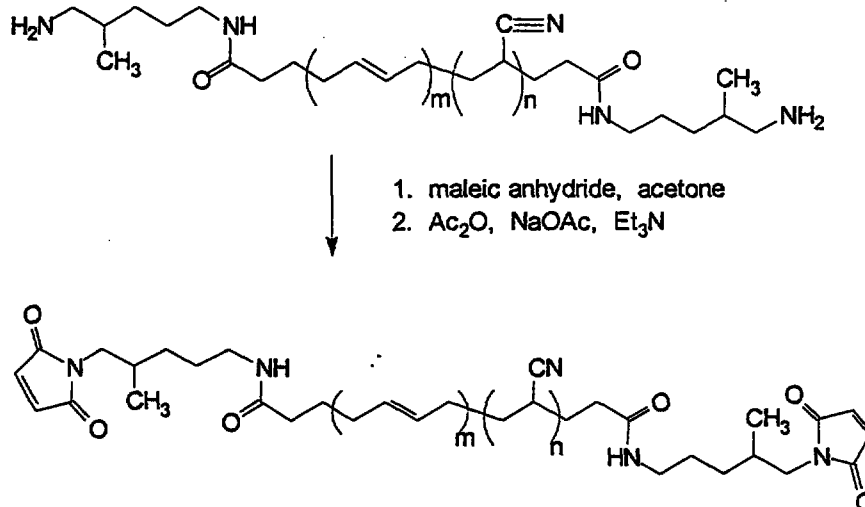

5

Amino-terminated butadiene-acrylonitrile (sold as Hycar resin 1300 X42 ATBN by BF Goodrich, in which the m and n depicted in the structure are integers to provide a number average molecular weight of 3600) (450 g, 500 mmol based on amine equivalent weight $\text{AEW} = 450\text{g}$) was dissolved in CHCl_3 (1000 mL) in a 3 L four-necked flask equipped with addition funnel, mechanical stirrer, internal temperature probe and nitrogen inlet/outlet. The stirred solution was placed under nitrogen and cooled on an ice bath. The addition funnel was charged with maleic anhydride (98.1 g, 1 mol) in CHCl_3 (50 mL) and this solution was added to the reaction over 30 minutes, maintaining the internal reaction temperature below 10°C . The resulting slurry was stirred for 30 minutes on ice, then allowed to warm to room temperature and stirred for an additional 4 hours. To the resulting slurry was added acetic anhydride (Ac_2O) (653.4 g, 6 mol), triethyl amine (Et_3N) (64.8 g, 0.64 mol) and sodium acetate (NaOAc) (62.3 g, 0.76 mol). The reaction was heated to mild reflux for 5 hours, allowed to cool to room temperature, and subsequently extracted with H_2O (1 L), satd. NaHCO_3 (1 L) and H_2O (2x1 L). Solvent was removed *in vacuo* to yield the maleimide terminated butadiene acrylonitrile.

10

15


20

This Sheet Has Been Replaced



EXAMPLE 4

Preparation of Tris(maleimide) Derived From Tris(epoxypropyl)isocyanurate

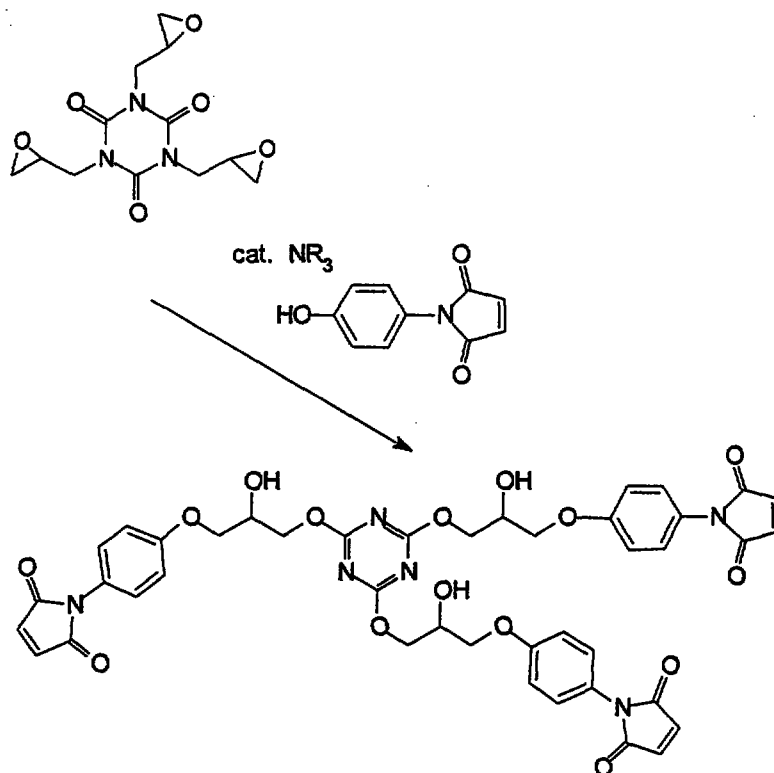

5

Tris(epoxypropyl)isocyanurate (99.0 g, 0.33 mol) is dissolved in THF (500mL) in a 2 L three-necked flask equipped with mechanical stirrer, internal temperature probe and nitrogen inlet/outlet. To this solution is added hydroxyphenylmaleimide (189.2 g, 1 mol) and benzyldimethylamine (1.4 g, 0.05 wt. %). The solution is heated to 80°C for 7 hours. The reaction is allowed to cool to room temperature, is filtered, and the filtrant washed with 5 % HCl_{aq} (100mL) and distilled H_2O (1 L). The resulting solid, triazinetris(maleimide), is vacuum dried at room temperature.


10

This Sheet Has Been Replaced



EXAMPLE 5

Preparation of Maleimidoethylpalmitate

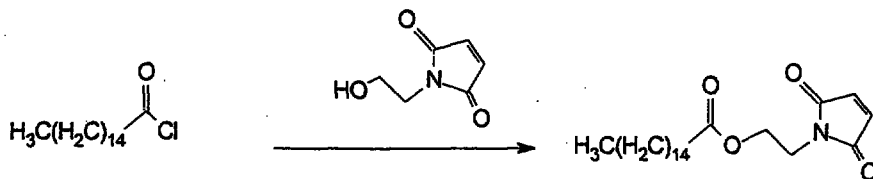


- 5 Palmitoyl chloride (274.9 g, 1 mol) is dissolved in Et_2O (500 mL) in a 2 L three-necked flask equipped with mechanical stirrer, internal temperature probe, addition funnel and nitrogen inlet/outlet. NaHCO_3 (84.0 g, 1 mol) in distilled H_2O (500 mL) is added with vigorous stirring and the solution cooled on an ice bath under nitrogen. The addition funnel is charged with hydroxyethylmaleimide (141 g, 1 mol) in Et_2O (100 mL) and this
- 10 solution added to the reaction over a period of 30 minutes, maintaining an internal $T < 10^\circ\text{C}$ during the addition. The reaction is stirred for another 30 minutes on ice, then allowed to warm to room temperature and stirred for 4 hours. The reaction is transferred to a separatory funnel and the isolated organic layer washed with distilled H_2O (500 mL), 5% HCl_{aq} (500 mL) and distilled H_2O (2x500 mL). The organics are isolated, dried over
- 15 MgSO_4 anhyd., filtered and solvent removed *in vacuo* to yield the aliphatic maleimide.

This Sheet Has Been Replaced



EXAMPLE 6

Preparation of Bismaleimide Derived from 5-Isocyanato-1-(isocyanatomethyl)- 1, 3, 3-trimethylcyclohexane

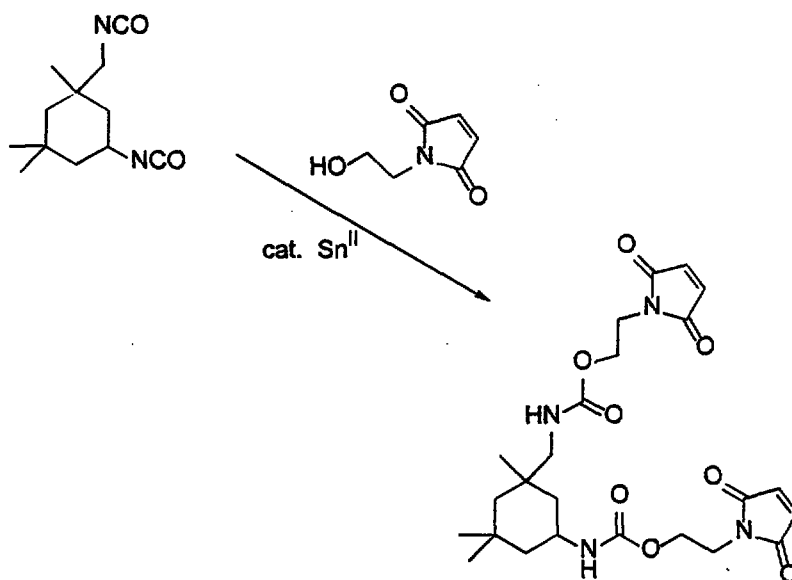


- 5 5-Isocyanato-1-(isocyanatomethyl)-1, 3, 3-trimethylcyclohexane (111.15 g, 0.5 mol) is solvated in THF (500 mL) in a 1 L three-necked flask equipped with mechanical stirrer, addition funnel and nitrogen inlet/outlet. The reaction is placed under nitrogen, and dibutyltin dilaurate (cat. Sn^{II}) (6.31 g, 10 mmol) added with stirring as the solution is
- 10 heated to 70°C . The addition funnel is charged with hydroxyethylmaleimide (141 g, 1 mol) dissolved in THF (100 mL). This solution is added to the isocyanate solution over 30 minutes, and the resulting mixture heated for an additional 4 hours at 70°C . The reaction is allowed to cool to room temperature and solvent removed *in vacuo*. The remaining oil is dissolved in CH_2Cl_2 (1 L) and washed with 10% HCl_{aq} (1 L) and distilled H_2O (2x1 L).
- 15 The isolated organics are dried over MgSO_4 , filtered and the solvent removed *in vacuo* to yield the maleimide.

This Sheet Has Been Replaced



EXAMPLE 7

Preparation of Dimer Divinyl Ether Derived from Dimerized Oleic Acid Diol




5

Bis(benzonitrile)palladium chloride (1.15 g, 5 mmol) is dissolved in a mixture of propyl vinyl ether (24.4 g, 3 mol) and oleic acid dimer diol (sold as Pripol 2033 by Unichema, 284.4 g, 500 mmol) in 2 L three-necked flask equipped with a mechanical stirrer under nitrogen. The solution is stirred for three days at room temperature, and then
10 poured onto activated carbon (20 g) and stirred for 1 hour. The resulting slurry is filtered, and excess propyl vinyl ether removed *in vacuo* to yield the divinyl ether as a yellow oil.

EXAMPLE 8

Preparation of Dimer Diacrylate Derived From Dimerized Oleic Acid Diol

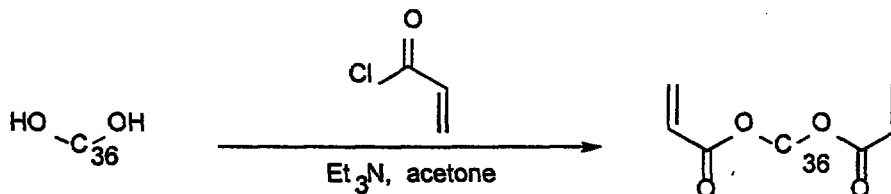

15

Oleic acid dimer diol (sold as Pripol 2033 by Unichema, 284.4 g, 500 mmol) is dissolved in dry acetone (500 mL) in a 1 L three-necked flask equipped with mechanical stirrer, addition funnel and internal temperature probe under nitrogen. Triethylamine (101.2 g, 1 mol) is added to this solution and the solution cooled to 4°C on an ice bath. Acryloyl chloride (90.5 g, 1 mol) solvated in dry acetone (100 mL) is charged into the
20 addition funnel and added to the stirred reaction solution over the course of 60 minutes, maintaining an internal temperature <10°C. This solution is stirred on ice for an additional
25 2 hours, then allowed to warm to room temperature and stirred for 4 hours. Bulk solvent is removed *via* a rotary evaporator, and the remaining residue solvated in CH₂Cl₂ (1 L).



This solution is washed with 5% HCl_{aq} (800 mL), and H₂O (2x800mL). The isolated organics are dried over MgSO₄ anhyd. and filtered, and the solvent removed *in vacuo* to yield the diacrylate as an oil.

5

EXAMPLE 9

Preparation of N-ethylphenyl Maleimide


4-Ethyl aniline (12.12g) was dissolved in 50 ml of anhydrous ethyl ether and slowly added to a stirred solution of 9.81 g of maleic anhydride in 100 ml of anhydrous ethyl ether chilled in an ice bath. After completion of the addition, the reaction mixture
10 was stirred for 30 minutes. The light yellow crystal was filtered and dried. Acetic anhydride (200 ml) was used to dissolve the maleamic acid and 20 g of sodium acetate. The reaction mixture was heated in an oil bath at 160°C. After 3 hours of reflux, the solution was cooled to room temperature, placed in a 1L beaker in ice water and stirred vigorously for 1 hour. The product was suction-filtered and recrystallized in hexane. The
15 collected crystalline material was dried at 50°C in a vacuum oven overnight. FTIR and NMR analysis showed the characteristics of ethyl maleimide.

This Sheet Has Been Replaced



EXAMPLE 10

Preparation of Bis(alkenylsulfide)

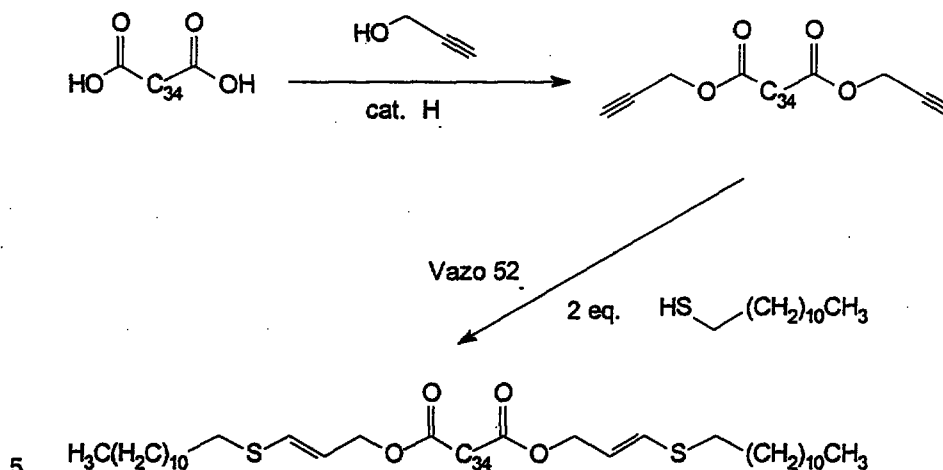

Dimer acid (sold under the trademark Empol 1024 by Unichema) (574.6 g, 1 mol) and propargyl alcohol (112.1 g, 2 mol) were solvated in toluene (1 L) in a 3 L three-necked flask equipped with mechanical stirring and a Dean-Stark distillation apparatus. Concentrated H_2SO_4 (6 mL) was added and the solution refluxed for 6 hours until 36 mL of H_2O was azeotropically distilled. The solution was allowed to cool to room temperature, washed with H_2O (2X1L), dried over MgSO_4 anhyd. and solvent removed *in vacuo* to yield the propargyl ester intermediate as an oil.

This ester intermediate (650.7 g, 1 mol) was solvated in THF (200 mL) in a 1L three-necked flask equipped with reflux condensor, mechanical stirrer and internal temperature probe under nitrogen. Lauryl mercaptan (404.8 g, 2 mol) and 2,2'-azobis(2,4-dimethylpentanenitrile) (sold under the trademark Vazo 52 by DuPont, 11 g) were added and the resulting mixture heated to 70°C on an oil bath with stirring for 7 hours. The reaction was allowed to cool to room temperature and solvent removed *in vacuo* to yield the mercaptan as an oil.

This Sheet Has Been Replaced



EXAMPLE 11

Underfill Encapsulant Compositions

Underfill encapsulant compositions were prepared by mixing together the organic components and then by blending the components with a silica filler under high shear until
5 homogeneous. The resulting compositions were light yellow slurries. The viscosities were measured by a Brookfield Viscometer using a 2.54cm spindle at 0.5 rpm at 25°C. The organic components, silica ratio by weight, Brookfield viscosity and thixotropic index are reported here:

10 Composition 11-A:

dimethylphenyl maleimide	20.1g (0.1mol)
hydroxybutyl vinyl ether	11.6g (0.1mol)
aminopropyltrimethoxy silane	00.32g (1 wt %)
15 t-butyl perethylhexanoate	00.32g (1 wt %)

The organic components were mixed with silica filler in a ratio of 40% by weight organic components to 60% by weight silica. The Brookfield viscosity was 21000 cp and the thixotropic index was 2.1.

20

Composition 11-B:

N-ethylphenyl maleimide	20.1g (0.1mol)
vinyl t-butylbenzoate	20.4g (0.1mol)
aminopropyltrimethoxy silane	00.4g (1 wt%)
25 t-butyl perethylhexanoate	

The organic components were mixed with silica filler in a ratio of 33% by weight organic components to 67% by weight silica. The Brookfield viscosity was 15600 cp and
30 the thixotropic index was 2.1.

Composition 11-C:

N-dodecylphenylmaleimide	34.1g (0.1mol)
isobornyl methacrylate	22.2g (0.1mol)
35 aminopropyltrimethoxy silane	00.56g (1 wt%)
t-butyl perethylhexanoate	



The organic components were mixed with silica filler in a ratio of 40% by weight organic components to 60% by weight silica. The Brookfield viscosity was 14300 cp and the thixotropic index was 2.5

5 Composition 11-D:

N-ethylphenyl maleimide	20.1g (0.1mol)
N-vinyl caprolactam	13.9g (0.1mol)
aminopropyltrimethoxy silane	00.34g (1 wt%)
t-butyl perethylhexanoate	

10

The organic components were mixed with silica filler in a ratio of 39% by weight organic components to 61% by weight silica. The Brookfield viscosity was 21000 cp and the thixotropic index was 2.4.

15

Composition 11-E:

N-dodecylphenylmaleimide	34.1g (0.1mol)
t-butyl styrene	16.0g (0.1mol)
aminopropyltrimethoxy silane	00.5g (1 wt%)
t-butyl perethylhexanoate	

20

The organic components were mixed with silica filler in a ratio of 40% by weight organic components to 60% by weight silica. The Brookfield viscosity was 21000 cp and the thixotropic index was 2.3.

25

EXAMPLE 12

Coefficient of Thermal Expansion and Glass Transition Region

30 The coefficient of thermal expansion (CTE) is the change in dimension per unit change in temperature for a given material. Different materials will have different rates of expansion, and rates of expansion for any given material will vary with the temperature. If the CTE is very different for elements attached together, thermal cycling can cause the attached elements to bend, crack, or delaminate. In a typical semiconductor assembly,

35 the CTE of the chip is in the range of 2 or 3 ppm/°C; for organic circuit board substrate, the CTE is greater than 30 ppm/°C; and for the solder interconnect, the CTE is 26-28



ppm/°C. In order to reinforce the solder interconnect, the CTE of the underfill encapsulant is best close to that of the solder.

When a polymer is subjected to the application of heat, it will move through a transition region between a hard, glassy state to a soft, rubbery state. This region is known as the glass transition region or T_g. If a graph of expansion of the polymer versus temperature is plotted, the glass transition region is the intersection between the lower temperature/glassy region coefficient of thermal expansion and the higher temperature/rubbery region coefficient of thermal expansion. Above this region, the rate of expansion increases significantly. Consequently, it is preferred that the glass transition of the polymer be higher than normal operating temperatures experienced during the application, and if reworkability is needed, that the glass transition be lower than any rework temperature.

For each of the Compositions 11-A to 11-E, the glass transition temperature (T_g) and the coefficient of thermal expansion (CTE) were measured using Thermal Mechanical Analysis on cured samples. A 2ml aliquot of each of the Compositions was injected into the 4mm cavity of a silica/rubber mold and cured to form a resinous cylinder of 4mm in diameter and 5mm in height. These samples were heated in a continuum of temperature ranging from -50°C to 200°C at a rate of increase in temperature of 5°C/minute. The T_g was measured as the temperature in °C at which the sample softened, determined as the breakpoint in the curve of expansion versus temperature. The CTE was measured as the slope of the expansion curve in units of ppm/°C.

The CTE and the T_g for Compositions 10-A to 10-E are reported here:

Sample	CTE ppm/°C	T _g °C
11-A	32	144
11-B	36	165
11-C	37	160
11-D	30	125
11-E	40	110

This Sheet Has Been Replaced



EXAMPLE 13

Reworkability

Each composition 11-A to 11-E was tested for reworkability when used to bond a 250X250 mil² silicon die to a FR-4 circuit board substrate. A one ml aliquot of underfill
5 sample was blended with 0.002g of 3mil glass bead spacers (to take the place of solder or polymer interconnects in an integrated circuit), dispensed between the die and the FR-4 board, and cured at 125°C for 20 minutes. To rework, the fixture was placed onto a 200°C hot plate for one minute. The chip was mechanically removed, leaving underfill
10 residue on the FR-4 board. The board was cooled to room temperature and methyl isobutyl ketone was used to dissolve and clean the residue from the board. The recovery time for the rework was two minutes. All samples demonstrated reworkability.

As a control, the same procedure was performed using an epoxy based adhesive sold under the tradename Ablebond ® XP-11 available from Ablestik Laboratories, Rancho Dominguez, California, as the underfill composition. Although the chip could be
15 removed from the board, the residue could not be cleaned without seriously scratching or denting the board.

This Example demonstrates that these compositions can be made to be reworkable and still meet the performance criteria needed for use as underfill encapsulants.

20

EXAMPLE 14

Reworkability

In this Example, a 250X250 mil² silicon die was connected to a soldermask-coated substrate using a tin/lead solder. After solder reflow, the underfill compositions 11-A to 11-E were individually dispensed along one side of individual dies and the substrate
25 heated to 80°C to initiate the capillary action to fill the gap between the die and substrate. The assembly was then put into a 150°C oven for 10 minutes to cure the underfill.

To rework, the assembly was heated on a 200°C hot plate for one minute, after which the die was mechanically removed from the board. At this temperature, the underfill material had softened and the solder interconnect had melted, leaving residues of both
30 solder and underfill on the board. A sponge swab saturated with methyl ethyl ketone



solvent was used to remove the underfill and clean the board until no residual material was observable under an optical microscope.

EXAMPLE 15

5

Reworkable Underfill Containing Multi-functional Monomers

An underfill encapsulant composition containing both mono-functional and poly-functional compounds were prepared by mixing together the organic components and then by blending the components with a silica filler under high shear until homogeneous. The resulting compositions were light yellow slurries.

Composition 15-A

	N-4-butylphenyl maleimide	22.9g (64.9%)
	4-hydroxybutyl vinyl ether	11.6g (32.9%)
15	triethylene glycol divinyl ether	0.2g (0.57%)
	methacloypropyl trimethoxysilane	0.3g (0.85%)
	dicumyl peroxide	0.3g (0.85%).

The organic components were mixed with silica filler in a ratio of 34% by weight organic components to 66% by weight silica (68.5 g) (sold by Denka, product number FB-6S). The CTE was measured as 34ppm/°C, T_g is 135°C. The sample was cured as in Example 13 and no residual material was observable under an optical microscope.

EXAMPLE 16

25

UV and Thermally Curable Compositions

Composition 16-A

A underfill encapsulant composition was prepared by combining the following ingredients with vigorous manual mixing until a homogenous paste was obtained:

30	Bismaleimide (prepared from polytetramethylene oxide- di- <i>p</i> -aminobenzoate, sold as Versalink P-650 by Henkel	1.01 g
----	---	--------

This Sheet Has Been Replaced



	Cyclohexanedimethanol divinylether (International Specialty Products):	0.19 g
	α,α -Dimethoxy- α -phenylacetophenone (sold as Irgacure 651 by Ciba Specialty Chemicals)	0.06 g
5	Hydrophilic Fused Silica (sold by Denka, ~5 micron)	3.78 g

A 250 mil x 250 mil silicon die placed on FR-4 laminate was encapsulated with the above paste and irradiated for 30 seconds using a pulsed xenon UV source (RC-500B Pulsed UV Curing System, Xenon Corporation). The encapsulant exhibited a hard, fully cured surface and held the die firmly to the laminate material when force was applied. The sample assembly was subsequently placed in a 175°C oven for 20 minutes. The encapsulated die was allowed to cool to room temperature and then forcibly removed from the laminate. No regions of uncured encapsulant were detected around the die edge, the laminate/adhesive interface or the adhesive/air surface interface.

Composition 16-B

A underfill encapsulant composition was prepared by combining the following ingredients with vigorous manual mixing until a homogenous paste was obtained:


20	Bismaleimide (prepared from polytetramethylene oxide- di- <i>p</i> -aminobenzoate, sold as Versalink P-650 by Henkel)	1.01 g
25	Cyclohexanedimethanol divinylether (International Specialty Products):	0.19 g
	<i>t</i> -Butyl-2-ethylhexanoate	0.03 g
30	Hydrophilic Fused Silica (sold by Denka, ~5 micron)	3.78 g

A 250 mil x 250 mil silicon die placed on FR-4 laminate was encapsulated with the above paste and placed in a 150°C oven for 30 min. The test assembly was allowed to cool to room temperature and the die was forcibly removed from the laminate. No regions of uncured encapsulant were detected around the die edge, the laminate/adhesive interface or the adhesive/air surface interface.


In accordance with this specification, various embodiments of the invention include, but are not limited to, those designated in the following numbered paragraphs:

1. A curable underfill encapsulant composition that comprises a maleimide having the formula $[M-X]_n - Q$ as described herein in which X is selected from the group of aromatic groups having the structures


(II)



(III)




(IV)



5


and (V)



2. The curable underfill encapsulant composition according to paragraph 1 in which Q is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.

3. The curable underfill encapsulant composition according paragraph 1 in which Q is a linear or branched chain alkyl species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.

4. The curable underfill encapsulant composition according to paragraph 1 in which Q is a urethane having the structure:




20

in which each R^2 independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50.

This Sheet Has Been Replaced




5. The curable underfill encapsulant composition according to paragraph 1 in which Q is an ester having the structure:



in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents.

6. The curable underfill encapsulant composition according to paragraph 1 in which Q is a siloxane having the structure:




in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10 and f is 1 to 50.


7. A curable underfill encapsulant composition that comprises a maleimide of the formula [M-Z]_m-K as described herein, in which Z is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.

8. The curable underfill encapsulant composition according to paragraph 7 in which Z is a linear or branched chain alkyl species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.


9. The curable underfill encapsulant composition according to paragraph 7 in which Z is a urethane having the structure:



in which each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50.




10. The curable underfill encapsulant composition according to paragraph 7 in which Z is an ester having the structure:




in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain
5 may contain aryl substituents.

11. The curable underfill encapsulant composition according to paragraph 7 in which Z is a siloxane having the structure:




in which the R¹ substituent independently for each position is H or an alkyl group having 1
10 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group
having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10, and f
is 1 to 50.

12. The curable underfill encapsulant composition according to paragraph 7 in which K is




13. The curable underfill encapsulant composition according to paragraph 7 in which K is



in which R⁵, R⁶, and R⁷ are a linear or branched chain alkyl,
alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide,
20 aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may
contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the
chain or as part of the chain, and in which any heteroatom present may or may not be
directly attached to the aromatic ring.

This Sheet Has Been Replaced


14. The curable underfill encapsulant composition according to paragraph 7 in which K is



15. A curable underfill encapsulant composition that comprises a vinyl compound


- 5 having the formula $\left[\begin{array}{c} R^1 \quad R^2 \\ \diagdown \quad / \\ C \\ \diagup \quad \diagdown \\ B-X_m \end{array} \right]_n Q$ as described herein in which B is selected from the group consisting of O, C(O), O-C(O), C(O)-O, C(O)NH and C(O)N(R^a).

16. The curable underfill encapsulant composition according to paragraph 15 in which X is selected from the group of aromatic groups having the structures


(II)

(III)


(IV)



and (V)



17. The curable underfill encapsulant composition according to paragraph 15 in which
15 X is




18. The curable underfill encapsulant composition according to paragraph 15 in which
Q is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up
to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or
20 heterocyclic substituents pendant from the chain or as part of the chain.

This Sheet Has Been Replaced




19. The curable underfill encapsulant composition according to paragraph 15 in which Q is a linear or branched chain alkyl species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.

5 20. The curable underfill encapsulant composition according to paragraph 15 in which Q is is a urethane having the structure:



each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50.

21. The curable underfill encapsulant composition according to paragraph 15 in which Q is an ester having the structure:



15 in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents.

22. The curable underfill encapsulant composition according to paragraph 15 in which Q is a siloxane having the structure:



20 in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10 and f is 1 to 50.

23. A curable underfill encapsulant composition that comprises a vinyl compound


25 having the formula $\left[\begin{array}{c} \text{R}^1 \quad \text{R}^2 \\ \diagdown \quad \diagup \\ \text{C} = \text{C} \\ \diagup \quad \diagdown \\ \text{B---Z}_m \end{array} \right]_n \text{---K}$ in which B is selected from the group consisting of O, C(O), O-C(O), C(O)-O, C(O)NH and C(O)N(R⁸).



24. The curable underfill encapsulant composition according to paragraph 23 in which Z is a linear or branched chain alkyl, alkyloxy, alkylene, or alkyleneoxy species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.


5 25. The curable underfill encapsulant composition according to paragraph 23 in which Z is a linear or branched chain alkyl species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain.

26. The curable underfill encapsulant composition according to paragraph 23 in which
10 Z is a urethane having the structure:




in which each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50.

15 27. The curable underfill encapsulant composition according to paragraph 23 in which Z is an ester having the structure:



in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents.

20 28. The curable underfill encapsulant composition according to paragraph 23 in which Z is a siloxane having the structure:




in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group
25 having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10, and f is 1 to 50.

This Sheet Has Been Replaced




29. The curable underfill encapsulant composition component according to paragraph 23 in which K is




in which p is 1 to 100.

30. The curable underfill encapsulant composition according to paragraph 23 in which
5 K is



in which R⁵, R⁶, and R⁷ are a linear or branched
chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine,
alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the
chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents
10 pendant from the chain or as part of the chain, and in which any heteroatom present may
or may not be directly attached to the aromatic ring.

31. The curable underfill encapsulant composition according to paragraph 23 in which
K is



This Sheet Has Been Replaced




What is claimed is:



1. A curable underfill encapsulant composition comprising a maleimide compound and a curing initiator selected from the group consisting of a free-radical initiator, a photoinitiator, and a combination of those, the maleimide compound having the formula $[M-X_m]_n-Q$ in which


(a) M is a maleimide moiety having the structure:




in which R¹ is H or an alkyl group having 1 to 5 carbon atoms;

- (b) each X independently is an aromatic group selected from the group of aromatic groups having the structures:


(I)




(II)




(III)



(IV)



(V)




15

, and

;

- (c) Q is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain, and in which any heteroatom present may or may not be directly attached to X; or

(d) Q is a urethane having the structure:




n in which each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon



atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50; or

(e) Q is an ester having the structure:



5 in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; or

(f) Q is a siloxane having the structure:



in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10 and f is 1 to 50;


(g) m is 0 or 1;

and

15 (h) n is 1 to 6.

2. The composition according to claim 1 in which the maleimide compound has the formula [M-Z]_m-K in which

(a) M is a maleimide moiety having the structure




20 in which R¹ is H or an alkyl having 1 to 5 carbon atoms;

(b) Z is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain, and in which any heteroatom present may or may not be directly attached to K;

or



(c) Z is a urethane having the




in which each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain

5 may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50;

or

(d) Z is an ester having the structure:



in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain

10 may contain aryl substituents;

or

(e) Z is a siloxane having the structure:




in which the R¹ substituent independently for each position is H or an alkyl group having 1


15 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10, and f is 1 to 50;

(f) K is an aromatic group selected from group of aromatic groups having the structures:

20 (VI)



(VII)




in which p is 1-100;






(VIII)




in which p is 1 to 100;

(IX)



(X)




in which R^5 , R^6 , and R^7 are a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may
10 contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the backbone in the chain, and in which any heteroatom present may or may not be directly attached to the aromatic ring; or


R^5 , R^6 , and R^7 are a siloxane having the structure

$-(CR^1_2)_e-[SiR^4_2-O]_f-SiR^4_2-(CH_3)_g-$ in which the R^1 substituent is H or an alkyl group
15 having 1 to 5 carbon atoms and the R^4 substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e is 1 to 10 and f is 0 to 50;


(XI)



(XII)



and (XIII)




5

(g) m is 0 or 1;

and

(h) n is 1-6.


- 10 3. A curable underfill encapsulant composition comprising a vinyl compound and a curing initiator selected from the group consisting of a free-radical initiator, a photoinitiator, and a combination of those, the vinyl compound having the formula




in which

- 15 (a) R¹ and R² are H or an alkyl group having 1 to 5 carbon atoms, or together form a 5 to 9 membered ring with the carbons forming the vinyl group;
- (b) B is C, S, N, O, C(O), O-C(O), C(O)-O, C(O)NH or C(O)N(R⁸), in which R⁸ is an alkyl group having 1 to 5 carbon atoms;
- (c) each X independently is an aromatic group selected from the group of
- 20 aromatic groups having the structures:


(I)




(II)




(III)



(IV)



(V)



5


, and

;

(d) Q is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain; and in which any heteroatom present may or may not be directly attached to X;

or


(e) Q is a urethane having the



15 in which each R^2 independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50;

or


(f) Q is an ester having the structure:



in which R^3 is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents;

or

(g) Q is a siloxane having the structure:



in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10 and f is 1 to 50;

5 (h) m is 0 or 1;

and

(i) n is 1-6.

4. The composition according to claim 3 in which the vinyl compound has the formula



in which


(a) R¹ and R² are H or an alkyl group having 1 to 5 carbon atoms, or together form a 5 to 9 membered ring with the carbons forming the vinyl group;

(b) B is C, S, N, O, C(O), O-C(O), C(O)-O, C(O)NH or C(O)N(R⁸), in which R⁸ is an alkyl group having 1 to 5 carbon atoms;

(c) Z is a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the chain, and in which any heteroatom present may or may not be directly attached to K;

or

(d) Z is a urethane having the




in which each R² independently is an alkyl, aryl, or arylalkyl group having 1 to 18 carbon atoms; R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents; X is O, S, N, or P; and n is 0 to 50;

or




(e) Z is an ester having the structure:



in which R³ is an alkyl or alkyloxy chain having up to 100 atoms in the chain, which chain may contain aryl substituents;

5 (f) Z is a siloxane having the structure:




in which the R¹ substituent independently for each position is H or an alkyl group having 1 to 5 carbon atoms, and the R⁴ substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e and g are independently 1 to 10, and f

10 is 1 to 50;


(g) K is an aromatic group selected from group of aromatic groups having the structures:

(VI)




;

15 (VII)




in which p is 1 to 100;

(VIII)



in which p is 1 to 100;


20 (IX)



;



(X)




in which R^5 , R^6 , and R^7 are a linear or branched chain alkyl, alkyloxy, alkyl amine, alkyl sulfide, alkylene, alkyleneoxy, alkylene amine, alkylene sulfide, aryl, aryloxy, or aryl sulfide species having up to about 100 atoms in the chain, which may
5 contain saturated or unsaturated cyclic or heterocyclic substituents pendant from the chain or as part of the backbone in the chain, and in which any heteroatom present may or may not be directly attached to the aromatic ring; or


R^5 , R^6 , and R^7 are a siloxane having the structure

$-(CR^1_2)_e-[SiR^4_2-O]_f-SiR^4_2-(CH_3)_g-$ in which the R^1 substituent is H or an alkyl group
10 having 1 to 5 carbon atoms and the R^4 substituent independently for each position is an alkyl group having 1 to 5 carbon atoms or an aryl group, and e is 1 to 10 and f is 0 to 50;

(XI)




(XII)




15


and (XIII)



(h) m is 0 ;and n is 1-6.



5. A curable encapsulant composition comprising a maleimide compound as described in claim 1 or 2, a vinyl compound as described in claim 3 or 4, and a curing initiator.

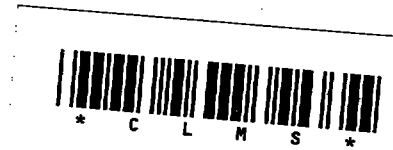

This Sheet Has Been Replaced

