



- (51) **International Patent Classification:**
H04W 48/08 (2009.01) *H04W 52/02* (2009.01)
- (21) **International Application Number:**
PCT/US2012/051606
- (22) **International Filing Date:**
20 August 2012 (20.08.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/525,353 19 August 2011 (19.08.2011) US
13/588,293 17 August 2012 (17.08.2012) US
- (71) **Applicant (for all designated States except US):** **QUALCOMM INCORPORATED** [US/US]; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121-1714 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **SAMPATH, Hemanth** [US/US]; 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **MERLIN, Simone** [IT/US]; 5775 Morehouse Drive, San Diego, California 92121-1714 (US).
- (74) **Agent:** **CHEATHAM, Kevin T.**; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121-1714 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

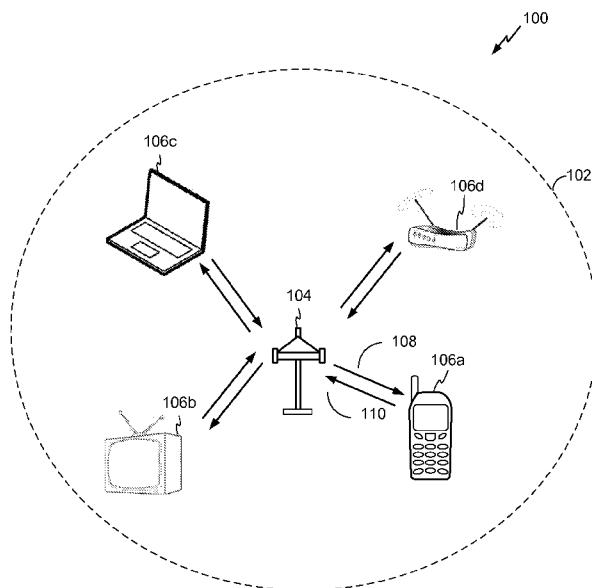
(54) **Title:** BEACONS FOR WIRELESS COMMUNICATION

FIG. 1

(57) **Abstract:** A system and method for wireless devices to efficiently receive communications by transmitting and receiving specialized beacon messages. Particularly, a wireless device may await reception of a synchronizing beacon message from a transmitting device. A relative position identifier within the synchronizing beacon message may then allow the wireless device to anticipate future beacon message transmissions and to synchronize its reception pattern with the transmitter. In this manner the wireless device need only receive and decode beacon messages germane to its operation.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*