



(43) International Publication Date
9 January 2014 (09.01.2014)

- (51) International Patent Classification:
F02C 7/36 (2006.01) *B23P 6/00* (2006.01)
F01D 15/12 (2006.01)
- (21) International Application Number:
PCT/US2013/033795
- (22) International Filing Date:
26 March 2013 (26.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/435,353 30 March 2012 (30.03.2012) US
- (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) Inventors: COFFIN, James B.; 35 Hobson Avenue, Windsor, Connecticut 06096 (US). PESCOSOLIDO, Alessio; 594D Mountain Road, West Hartford, Connecticut 06117 (US).
- (74) Agent: GOTTSCHALK, William S.; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: GAS TURBINE ENGINE GEARED ARCHITECTURE AXIAL RETENTION ARRANGEMENT

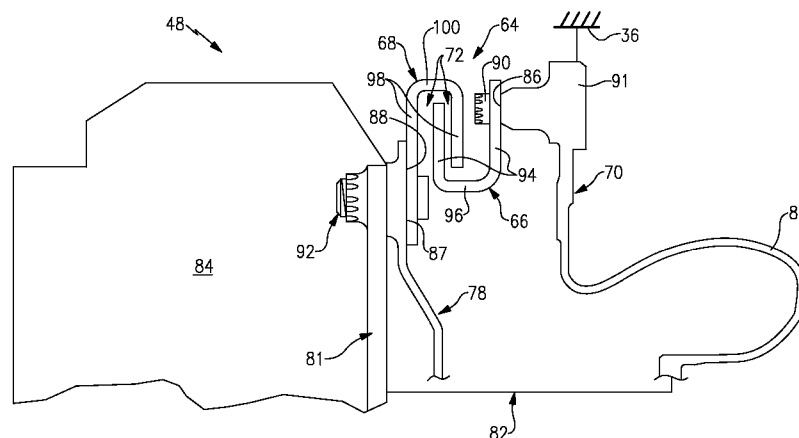


FIG. 3

(57) Abstract: A support assembly for a geared architecture includes an engine static structure. A flex support is secured to the engine static structure and includes a bellow. A support structure is operatively secured to the flex support. A geared architecture is mounted to the support structure. First members are removably secured to one of the engine static structure and the flex support and second members are removably secured to the support structure. The first and second members are circumferentially aligned with one another and spaced apart from one another during a normal operating condition. The first and second members are configured to be engageable with one another during an extreme event to limit axial movement of the geared architecture relative to the engine static structure.

