BAND CONVERTED CELLULAR COMMUNICATION SYSTEMS AND METHODS

BACKGROUND

The present invention relates generally to radiocommunication systems and, more particularly, to systems and methods for increasing the capacity and/or coverage area of cellular-type communication systems.

The rapid growth of cellular communication systems has compelled designers to search for ways in which system capacity can be increased without reducing communication quality beyond consumer tolerance thresholds. One way in which increased capacity can be provided is by increasing the efficiency in which the available Cellular spectrum is used, e.g., by changing from analog to digital communication techniques. In North America, this change was implemented by transitioning from the analog AMPS system to a digital system (D-AMPS) which was standardized as IS-54B and later as IS-136. Other technological improvements, such as the implementation of Time Division Multiple Access instead of Frequency Division Multiple Access, have also increased Cellular system capacity.

Even with the implementation of more spectrally efficient technologies, the capacity of cellular communication systems continues to be a concern. Another way in which the capacity of Cellular communications system can be increased is to provide additional spectrum. For example, the FCC originally allocated two blocks of frequencies (i.e., 825-845 MHz (uplink) and 870-890 MHz (downlink)) for Cellular band service in the United States. In 1987, the FCC allocated an additional 5 MHz to each block to increase Cellular systems' capacity. The current Cellular bandwidth allocation in the United States, complete with channel numbering, is illustrated in the tables shown in Figures 1A and 1B. Therein, Figure 1B shows how the transmitter center frequencies can be determined for each channel described in Figure 1A. Of course, this solution has natural limits since the usable frequency spectrum is finite and other, existing system types already own portions of the usable spectrum.

For example, Land Mobile Radio (LMR) systems are allocated frequency

blocks which are contiguous with those of the Cellular band, i.e., 806-824 MHz (uplink) and 851-869 (downlink). The conventional channel assignments for the LMR spectrum are illustrated in the tables of Figures 2A and 2B. LMR systems are transmission trunked systems that are commonly used to provide radio communication service between individual units of a particular organization. For example, police departments use a version of LMR (commonly referred to as public service trunked (PST) systems) to communicate between patrol cars and headquarters. Unlike Cellular systems, however, LMR systems have historically been implemented as large independent sites serviced by one (or a few) transmitting base stations, rather than over a wide geographical area serviced by many transmitting base stations as in Cellular systems. At each LMR site, an operator can be allocated a portion of the LMR spectrum within which a fixed frequency pair is selected for use as a control channel while all of the other frequencies can be used for traffic.

In 1994, the FCC announced that the frequency spectrums which have been allocated for LMR, Cellular and Personal Communications Systems (PCS) would be uniformly regulated, such that an operator can use frequencies within the joint bandwidth in any desired manner. Coupled with other regulatory changes, for example those which allow LMR spectrum to be licensed on a wide-area basis rather than a site-by-site basis, it has now become realistic to consider using LMR frequencies in non-conventional ways, e.g., using cellular communication techniques. This usage of the LMR spectrum is termed herein "downbanded cellular (DBC)".

To implement DBC systems which are highly cellular compatible, several challenges must first be addressed. For example, conventional LMR systems operating in the United States have 25 KHz channel widths, whereas Cellular systems operating in accordance with IS-54B have 30 KHz channel widths. Other issues, such as adjacent channel interference, are also a concern.

SUMMARY

Accordingly, the present invention provides techniques for adapting the portion of the frequency spectrum allocated to Land Mobile Radio (LMR) for use as downbanded cellular channels. These downbanded cellular channels can be employed, for example, either to supplement a cellular operator's system capacity or as a stand alone cellular-style system which can provide complementary geographic coverage which may, for example, bridge existing Cellular systems.

According to a first aspect of the present invention, the conventional channelization of the LMR spectrum is redefined in a manner which provides significant advantages. More specifically, for every six originally specified. 25 KHz LMR channels, five new 30 KHz DBC channels are specified. In this way, complete compatibility with cellular systems, e.g,. allowing roaming between cellular and DBC systems, is achieved according to the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing, and other, objects, features and advantages of the present invention will be more readily understood upon reading the following detailed description in conjunction with the drawings in which:

Figures 1A and 1B are tables which show conventional Cellular band channel assignments;

Figures 2A and 2B are tables which apportion the 18 MHz of LMR spectrum into equivalent 25 KHz channel assignments;

Figure 3A illustrates a DBC system according to the present invention that is adjacent to a conventional cellular system

Figure 3B illustrates a DBC system according to the present invention that is coincident with a conventional cellular system;

Figure 4 is a block diagram of a portion of an exemplary radio communication system according to the present invention;

Figure 5 illustrates one hypothetical mapping of conventional 25 KHz LMR channels into 30 KHz channels;

This Sheet Has Been Replaced

Figures 6A and 6B are tables which illustrate channel assignments of the LMR spectrum for DBC channels according to the present invention;

Figure 7 illustrates mapping of LMR channels into DBC channels according to the present invention at a conceptual level;

Figures 8-10 each illustrate a detailed example of how particular LMR channel groups can be rechannelized to provide DBC channels according to the present invention;

Figure 11 illustrates an uplink spectral power mask defined by the FCC to limit adjacent channel interference and an output DBC transmit waveform generated from a remote station using transmit pulse shaping according to the present invention; and

Figure 12 illustrates an downlink spectral power mask defined by the FCC to limit adjacent channel interference and an output DBC transmit waveform generated by a base station using transmit pulse shaping according to the present invention.

DETAILED DESCRIPTION

The vision for downbanded cellular systems includes both the provision of stand-alone DBC systems which utilize the LMR spectrum and provide enhanced communication services, as well as cooperative applications of DBC systems and Cellular systems. For example, Figure 3A illustrates one such cooperative application of DBC systems. In the figure, a DBC system is positioned adjacent to a Cellular system. The DBC system is illustrated as having a plurality of cells each of which are supported by a mobile switching center (MSC) 10. Similarly, the Cellular system has a plurality of cells supported by three MSCs 12, 14 and 16. Each cell includes one or more base stations (not shown) connected to their respective MSC for transmitting signals to, and receiving signals from, mobile stations within the cell. In this exemplary configuration, the DBC system provides additional geographic coverage which would allow, for example, the operator of the Cellular system to provide greater geographic service to its customers.

Another cooperative example is illustrated in Figure 3(b). Therein, each of the larger circles and ellipses represents a Cellular system and each of the smaller circles within Cellular system 20 represents a DBC system. Thus, this example illustrates a case where DBC systems are coincident with a Cellular system and can be used to supplement the Cellular system's capacity.

Having described exemplary applications of DBC systems at a cell level, some general details of base stations and mobile stations are provided to round out this discussion, but without providing an unnecessary amount of detail that might obscure the present invention. Those skilled in the art will appreciate that DBC base stations and mobile stations can be manufactured using substantially the same components as conventional Cellular base stations and mobile stations, with certain exceptions, e.g., DBC equipment will have the rf capability to operate in the LMR frequency band. Readers interested in obtaining additional information relating to more specific details of exemplary mobile and base station implementations are directed to copending U.S. Patent Application Serial No. 07/967,027 entitled "Multi-Mode Signal Processing" filed on October 27, 1992 to P. Dent and B. Ekelund, which disclosure is incorporated here by reference. DBC systems can also be implemented in general accordance with D-AMPS as specified in EIA/TIA IS-54B and IS-136, the disclosures of which are also incorporated here by reference.

Figure 4 represents a block diagram of a portion of an exemplary downbanded cellular radiocommunication system according to one embodiment of the present invention which can be used to implement the foregoing. The system shows an exemplary base station 110 and a mobile 120. The base station includes a control and processing unit 130 which is connected to the MSC 140 which in turn is connected to the public switched telephone network (not shown). Since DBC systems are completely Cellular compatible, MSC 140 can be identical to the switching equipment used in Cellular systems.

The base station 110 for a cell includes a plurality of voice channels handled by voice channel transceiver 150 which is controlled by the control and processing unit 130. Also, each base station includes a control channel transceiver 160 which

may be capable of handling more than one control channel. The control channel transceiver 160 is controlled by the control and processing unit 130. The control channel transceiver 160 broadcasts control information over the control channel of the base station or cell to mobiles locked to that control channel. The voice channel transceiver handles the traffic or voice channels. When the mobile 120 first enters the idle mode, it will locate a DBC control channel from which it can acquire overhead information and listen for pages. In conventional LMR systems, a control channel was identified by the processing unit 180 tuning the mobile station's voice/control channel transceiver 170 to a control channel, which control channel has been preprogrammed into the mobile station by the network operator. This technique, however, is not appropriate for DBC systems in which control channels can be placed on any DBC channel frequency. Exemplary techniques for locating a DBC control channel are described in the above-incorporated U.S. Patent Application entitled "A Method and Apparatus for Locating a Digital Control Channel in a Downbanded Cellular System".

Thus far, the description of DBC systems closely parallels that of traditional Cellular systems. However, several problems were faced by Applicant in adapting the LMR portion of the spectrum to usage for DBC systems. The first of these difficulties relates to the historical usage of 25 KHz channel widths in the LMR spectrum as opposed to the 30 KHz channel widths used in many Cellular systems. To provide maximum equipment compatibility between DBC and Cellular systems, it is desirable to provide DBC channels that also have 30 KHz channel widths.

There are many ways in which 30 KHz channels could be specified for the LMR spectrum. For example, each network operator could decide independently where to position a 30 KHz channels based upon the portions(s) of the LMR spectrum owned by that network operator. Of course, at least two contiguous 25 KHz channels need to be owned by a network operator to provide sufficient bandwidth for a single 30 KHz channel. Since network operators in different geographic areas will frequently own different patterns of the LMR spectrum, allowing the network operators to select where the 30 KHz channels will be placed

(i.e., allowing them to determine the center frequencies of each new 30 KHz channel) would likely provide different results as each network operator attempts to maximize his or her system's capacity. For example, consider the representation of the LMR spectrum illustrated in Figure 5. Therein, the darkened parabolas indicate channels which are owned by one network operator while the unshaded parabolas represent channels owned by other operators. As can be seen from the figure, this particular operator has two sets of three contiguous 25 KHz LMR channels. To maximize 30 KHz channel capacity, this operator could, if permitted to locate a 30 KHz channel at any given center frequency, convert these two sets of three LMR channels into two sets of two 30 KHz channels. However, Applicant has recognized that, although spectrally efficient, allowing network operators to select the frequencies at which 30 KHz channels will be centered would seriously impair compatibility between different DBC systems and between DBC systems and Cellular systems. Without knowledge of where each system's channels are located, roaming between systems would become much more complicated. For example, a set of frequency centers for each network operator would need to be stored in an EEPROM (not shown) in the mobile station so that the mobile would know which frequencies were associated with each channel number for a given network. Since EEPROM memory is expensive this solution is uneconomical.

Thus, according to one aspect of the present invention, Applicants have specified the channel centers for DBC channels in such a way as to maximize compatibility with existing cellular systems. An exemplary specification is illustrated in Figures 6A and 6B wherein the transmitter center frequencies referred to in the last two columns of Figure 6A are illustrated by way of equation in Figure 6B. In addition to being fixed across DBC systems for purposes of compatibility, the center frequencies indicated in Figures 6A and 6B have been selected for additional compatibility reasons. For example, the center frequencies depicted in Figures 6A and 6B were selected based upon the known harmonics of frequency synthesizing oscillators typically used in cellular equipment so that the same oscillators can be used in DBC equipment to minimize equipment costs. This is

particularly valuable when the DBC equipment is multiple hyperband capable, e.g., capable of operating in more than one of the LMR, Cellular and the PCS frequency bands.

By selecting DBC channels in the manner described above according to the present invention, a fixed relationship exists between the already specified 25 KHz LMR channels and the 30 KHz DBC channels specified herein. That is, for every six, 25 KHz LMR channels there exist five, 30 KHz DBC channels. This concept is illustrated in Figure 7.

Of course in any given geographic area, not all of the LMR frequencies can be converted into DBC channels. As mentioned above with respect to the example of Figure 5, certain network operators will own non-contiguous channels and channel groups. It is interesting to note, as shown in Figure 8, that given the same network ownership of LMR channels illustrated in the upper spectrum of Figure 5, only two DBC channels according to the present invention can be created when using the DBC channels specified in Figure 6A and 6B. Note that in Figure 4, where the network operator was permitted to select the 30 KHz channels' center frequencies, twice as many new 30 KHz channels were obtained. This illustrates one of the tradeoffs recognized and selected by Applicant according to the present invention - potentially lower spectrum utilization efficiency but much better compatibility due to uniformity of channel center locations across systems. In Figure 8, the repetitive six channel LMR pattern and five channel DBC pattern is reflected by the numbers provided directly above the parabola channel representations. Note that these are not actual channel numbers and are, therefore, referred to in quotes below. Center frequencies are also provided in a smaller font where appropriate.

Thus, according to this exemplary scenario, the "6", "1" and "2" LMR channels owned by this particular operator can only be converted into a number "1" DBC channel since the bandwidths of DBC channels "5" and "2" fall outside the spectrum owned by the operator. Although this may seem somewhat spectrally inefficient, several techniques can be used to avoid or ameliorate this effect of DBC

channelization. For example, network operators can negotiate among themselves to obtain contiguous LMR spectrums so that DBC channelization is more spectrally efficient. Even if this is not possible, the remaining spectrum can be put to other worthwhile purposes. For example, in Figure 7 the distance between center frequencies for active DBC channel "1" and active LMR channel "5" (after this network operator converts to the DBC channels illustrated in the lower spectrum) is 52.5 KHz. This translates into an unused band of 25 KHz, which can be used as a large, inherent guard band. Guard bands are used to provide a buffer between adjacent frequencies to protect against adjacent channel interference, which is discussed in more detail below. Alternatively, this extra bandwidth can be used for transmitting signals based upon alternative technologies. Even though a 1:1 LMR to DBC channelization ratio is not obtained, it is envisioned that DBC channels will be allocated according to well known frequency re-use techniques, thus providing a substantial capacity increase over the conventional usage of the LMR spectrum.

Other exemplary transformations of an LMR operator's owned portion of the LMR spectrum into DBC channels are illustrated in Figures 9 and 10. In Figure 9, an operator owns a set of five contiguous LMR channels, which can be converted into four DBC channels and a pair of contiguous LMR channels which can be converted into a single DBC channel. This figure also illustrates the minimum frequency distance between an LMR channel center and a DBC channel center. This occurs when an active LMR channel of type "6" is operating next to an active DBC channel of type "1". Accordingly, adjacent channel interference considerations must take into account this 27.5 KHz center to center distance as described below. The other DBC center frequency to LMR center frequency markings indicate that a 5 KHz guardband is provided between DBC channel type "4" and LMR channel type "6" and between LMR channel type "1" and DBC channel type "2" while a 15 KHz guardband exists on the other side of DBC channel type "2".

In Figure 10, an LMR operator has two groups of three LMR channels available for DBC channelization. Thus, LMR channels "4", "5" and "6" are

converted into DBC channels "4" and "5". Since this LMR operator does not own the next frequency, i.e., LMR channel type "1", a DBC channel at the next specified DBC center frequency cannot be created. However, additional guardband is provided for the following DBC channel type "2".

Given the spectral proximity between type "1" DBC channels and type "6" LMR channels, the issue arises as to whether or not the power transmitted on these LMR channels will affect reception of signals on these DBC channels and vice versa. Historically, this has been a particular concern in the LMR portion of the spectrum wherein directly adjacent channels can be used in the same geographic location. By way of contrast, frequency reuse patterns are typically employed in cellular systems such that the channels used at a particular site are commonly spaced relatively far apart, e.g., 210 KHz. In order to ensure that LMR network operators do not cause interference between each other's transmissions, the FCC has mandated stringent emission masks that dictate the spectral power which can be output by a transmitter both for the uplink (mobile to base station direction) and downlink (base to mobile station direction). The masks promulgated for downbanded cellular usage of the LMR spectrum is likely to be similar to those illustrated by functions 1100 and 1200 in Figures 11 and 12, respectively.

It is believed, however, that the transmissions of conventional Cellular band equipment may result in spectral power output waveforms which violate masks 1100 and 1200 (depending upon the techniques used to represent the output power spectrum). Thus, according to another aspect of the present invention, a technique for providing downbanded cellular equipment which is in conformance with the masks 1100 and 1200 for operation in the LMR spectrum is outlined below.

In order to optimize a downbanded cellular system for operation in accordance with masks 1100 and 1200, both the transmit and receive signal processing circuitry of conventional Cellular equipment should be adjusted. However, since another object of the present invention is to minimize the changes made to existing Cellular equipment, to thereby reduce production cost and speed up implementation time, this exemplary embodiment of the present invention adapts

only the transmit signal processing to create downbanded cellular transmissions whose spectral power outputs fall within the boundaries set forth by masks 1100 and 1200. More specifically, by adjusting the transmit pulse shaping filter characteristics in both the mobile station and base station's transmitters, the output waveforms can be adjusted to within acceptable limits, e.g., the waveforms 1102 and 1202 shown in Figures 11 and 12, respectively. An exemplary set of transmit pulse filter characteristics used in a Cellular system and those proposed herein for a downbanded cellular system to accommodate the masks 1100 and 1200 are illustrated in Tables A-D below, both for the uplink and downlink.

TX Pulse Parameter	Specification
Filter	SRC
Rolloff Factor (α)	0.35
Truncation Length	48 samples
Sampling rate	8 samples/symbol
Windowing	No Window

A. Cellular Uplink

TX Pulse Parameter	Specification
Filter	SRC
Rolloff Factor (α)	0.075
Truncation Length	48 samples
Sampling rate	8 samples/symbol
Windowing	Kaiser Window

B. DBC Uplink

TX Pulse Parameter	Specification
Filter	SRC
Rolloff Factor (α)	0.35
Truncation Length	90 samples
Sampling rate	8 samples/symbol
Windowing	No Window

C. Cellular Downlink

TX Pulse Parameter	Specification
Filter	SRC
Rolloff Factor (α)	0.035
Truncation Length	90 samples
Sampling rate	8 samples/symbol
Windowing	Hamming Window

D. DBC Downlink

For the uplink, as can be seen above, the rolloff factor of the transmit pulse filter was reduced from 0.35 to 0.075 so that the main lobe of the output power function 1102 was brought down below the corner 1104 of mask 1100. In doing so, however, the side lobes 1106 of output function 1102 were moved up sufficiently to violate mask 1100. Accordingly, a Kaiser windowing function was selected as part of the filtering methodology, to suppress the side lobes so that they too conformed with mask 1100. Similarly, a rolloff factor of 0.10 and a Hamming window function were selected to enforce the constraints required by mask 1200 for

THIS SHEET HAS BEEN REPLACED

the downlink output transmission spectrum 1202.

The above-described exemplary embodiments are intended to be illustrative in all respects, rather than restrictive, of the present invention. Although the foregoing exemplary embodiments have been described in terms of base and mobile stations, the present invention can be applied to any radiocommunication system. For example, satellites could transmit and receive data in communication with DBC remote devices, including portable units, personal digital assistants, etc.

Moreover, although the present invention has been described primarily in terms of communicating within the LMR spectrum, the present invention is also intended to be used in multiple hyperbands, e.g,. in a dual-mode DBC and Cellular band mobile phone. For example, the mobile station can be implemented to operate in the A-side cellular band and a portion of the LMR band. This DBC mobile station has the advantage of being able to use existing cellular networks which allow a DBC network operator to offer a nationwide roaming footprint. Readers interested in aspects of multiple hyperband capable systems are referred to U.S. Patent Application Serial No. 08/425,051 entitled "Multiple Hyperband Mobile and Base Stations" to Krister Raith filed on April 19, 1995, the disclosure of which is incorporated here by reference. Thus the present invention is capable of many variations in detailed implementation that can be derived from the description contained herein by a person skilled in the art. All such variations and modifications are considered to be within the scope and spirit of the present invention as defined by the following claims.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced

CLAIMS:

1. A method for using an LMR portion of a frequency spectrum, which LMR portion is typically used to provide transmission trunked communication on channels having 25 KHz bandwidths, to instead provide downbanded cellular radiocommunication service, the method comprising the steps of:

redefining said LMR portion of the frequency spectrum to provide downbanded cellular channels having 30 KHz bandwidths;

allocating, to a network operator, a plurality of said downbanded cellular channels, which downbanded cellular channels are determined based on an amount of contiguous spectrum controlled by said operator; and

transmitting signals between stations over an air interface using said allocated downbanded cellular channels to provide radiocommunication services.

2. The method of claim 1, wherein said step of redefining further comprises the step of:

defining channel center frequencies for said downbanded cellular channels according to the following relationship:

Transmitter	Channel Number	Center Frequency MHz
Mobile	$1 \leq N \leq 600$	0.030 (N) + 805.980
Base	$1 \leq N \leq 600$	0.030 (N) + 850.980

3. The method of claim 2, wherein said step of allocating further comprises the step of:

allocating those defined downbanded cellular channels which are encompassed by said contiguous spectrum controlled by said operator.

4. The method of claim 1, wherein said step of transmitting signals using said allocated downbanded cellular channels further comprises the step of:

* C L M S *

filtering said signals according to mask limitations so as to reduce adjacent channel interference.

5. The method of claim 3, further comprising the step of:

using any remaining portion of said contiguous spectrum which is outside of said allocated downbanded cellular channels as guard band between said downbanded cellular channels and active LMR channels controlled by another operator.

6. A method for providing downbanded cellular (DBC) radiocommunications services comprising the steps of:

defining a plurality of 30 KHz DBC channels in the frequency ranges from 806-824 MHz and 851-869 MHz at predetermined center frequencies:

comparing an operator's contiguous 25 KHz channels with said defined 30 KHz channels;

allocating a defined 30 KHz DBC channel to said operator where said step of comparing indicates that said defined 30 KHz DBC channel is covered by two of said operator's contiguous 25 KHz channels; and

transmitting signals between stations over an air interface to provide said DBC radiocommunications services using said allocated 30 KHz DBC channel.

7. The method of claim 6, wherein said stations include a mobile station and a base station.

8. The method of claim 6, wherein said step of defining further comprises the step of:

defining said predetermined center frequencies according to the following relationship:

Transmitter	Channel Number	Center Frequency MHz
Mobile	$1 \leq N \leq 600$	0.030 (N) + 805.980
Base	$1 \leq N \leq 600$	0.030 (N) + 850.980

9. The method of claim 6, further comprising the step of:

using a remaining portion of said contiguous spectrum which is outside of said allocated 30 KHz DBC channel as guard band between said allocated 30 KHz DBC channel and active LMR channels controlled by another operator.

10. The method of claim 6, wherein said step of transmitting signals using said allocated 30 KHz DBC channel further comprises the step of:

filtering said signals according to mask limitations so as to reduce adjacent channel interference.

FIG. 1A
(PRIOR ART)

SYSTEM	MHz	NUMBER OF CHANNELS	BOUNDARY CHANNEL NUMBER	TRANSMITTER CENTER FREQUENCY, MHz MOBILE	TRANSMITTER CENTER FREQUENCY, MHz BASE
(NOT USED)		1	(990)	(824.01)	(869.01)
A''	1	33	991 1023	824.040 825.000	869.040 870.000
A	10	333	1 333	825.030 834.990	870.030 879.990
B	10	333	334 666	835.020 844.980	880.020 889.980
A'	1.5	50	667 716	845.010 846.480	890.010 891.480
B'	2.5	83	717 799	846.510 848.970	891.510 893.970

FIG. 1B
(PRIOR ART)

TRANSMITTER	CHANNEL NUMBER	CENTER FREQUENCY MHz
MOBILE	$1 \leq N \leq 799$ $990 \leq N \leq 1023$	$0.030(N) + 825.000$ $0.030(N-1023) + 825.000$
BASE	$1 \leq N \leq 799$ $990 \leq N \leq 1023$	$0.030(N) + 870.000$ $0.030(N-1023) + 870.000$

SUBSTITUTE SHEET (RULE 26)

FIG. 2A
(PRIOR ART)

SYSTEM	MHz	NUMBER OF CHANNELS	BOUNDARY CHANNEL NUMBER	TRANSMITTER CENTER FREQUENCY, MHz MOBILE	TRANSMITTER CENTER FREQUENCY, MHz BASE
D (SMR)	10	720	1	806.0125	851.0125
			720	823.9875	868.9875
(NOT USED)		1	(990)	(824.01)	(869.01)

FIG. 2B
(PRIOR ART)

TRANSMITTER	CHANNEL NUMBER	CENTER FREQUENCY, MHz
MOBILE	$1 \leq N \leq 720$	$0.025(N) + 805.9875$
BASE	$1 \leq N \leq 720$	$0.025(N) + 850.9875$

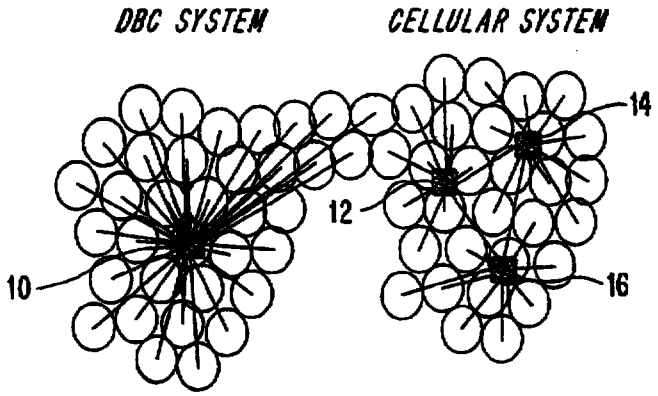

DBC SYSTEM
CELLULAR SYSTEM
14
12
10
16

FIG. 3A

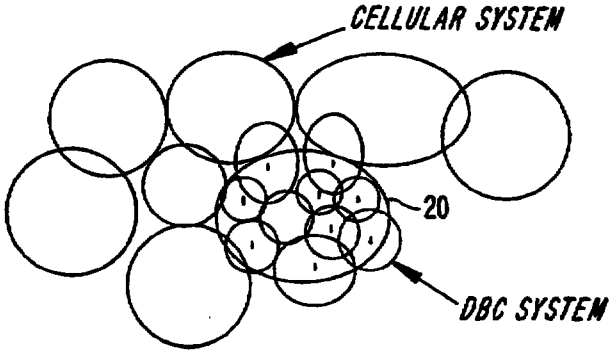
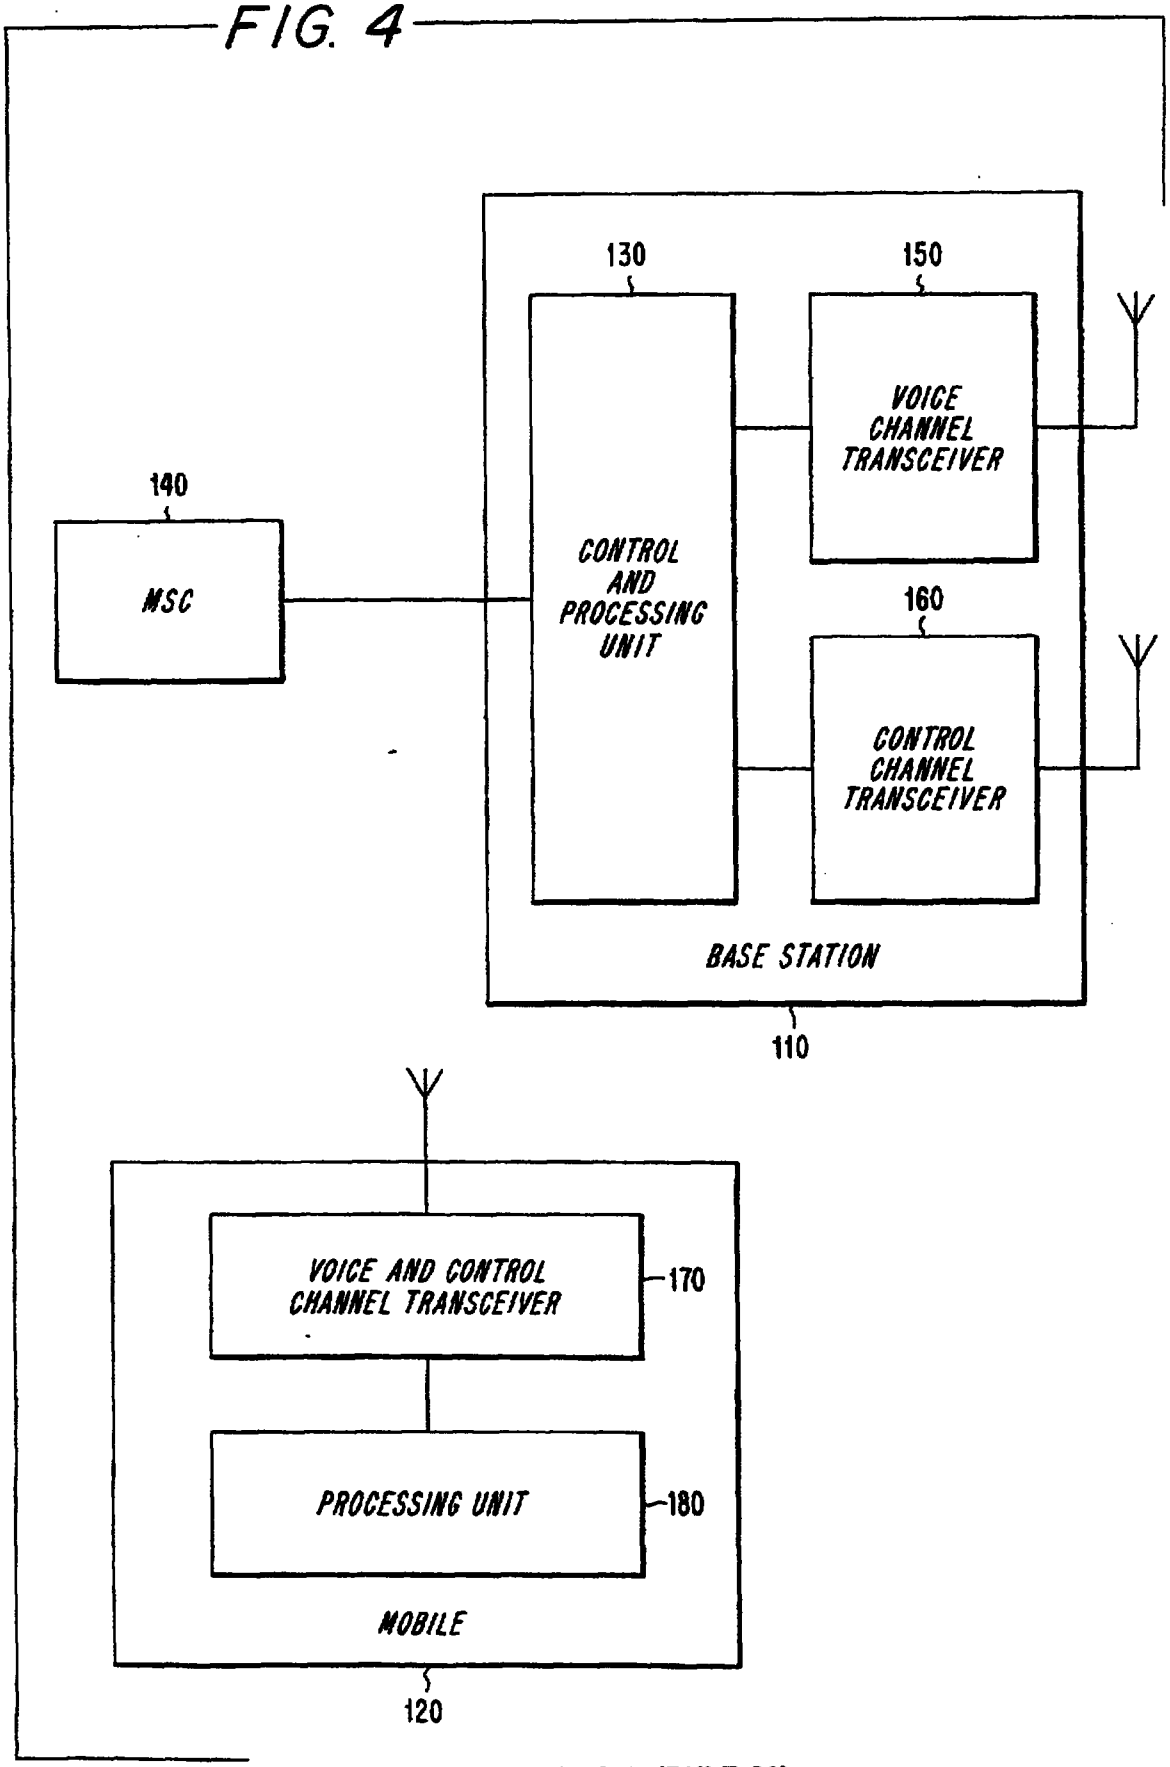

CELLULAR SYSTEM
20
DBC SYSTEM

FIG. 3B

FIG. 4


130
150
VOICE CHANNEL TRANSCEIVER
140
MSC
CONTROL AND PROCESSING UNIT
160
CONTROL CHANNEL TRANSCEIVER
BASE STATION
110
VOICE AND CONTROL CHANNEL TRANSCEIVER
170
PROCESSING UNIT
180
MOBILE
120

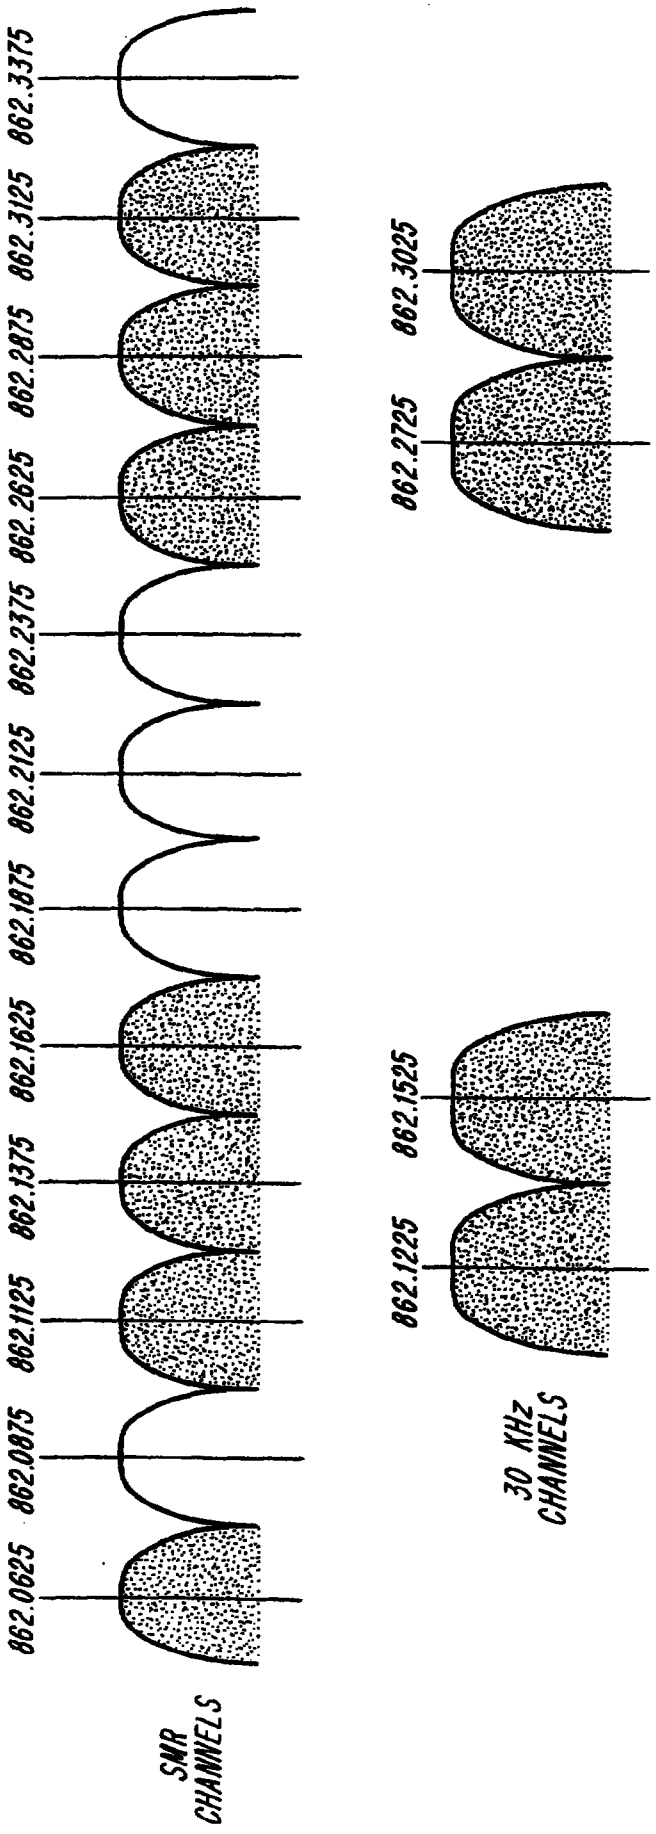

862.0625
862.0875
862.1125
862.1375
862.1625
862.1875
862.2125
862.2375
862.2625
862.2875
862.3125
862.3375
SMR CHANNELS
862.1225
862.1525
862.2725
862.3025
30 KHz CHANNELS

FIG. 5

FIG. 6A

SYSTEM	MHz	NUMBER OF CHANNELS	BOUNDARY CHANNEL NUMBER	TRANSMITTER CENTER FREQUENCY, MHz MOBILE	TRANSMITTER CENTER FREQUENCY, MHz BASE
(NOT USED)		1	(1)	(806.01)	(851.01)
C (SNR)	18	599	2 600	806.04 823.98	851.04 868.98
NOT USED		1	(990)	(824.01)	(869.01)

FIG. 6B

TRANSMITTER	CHANNEL NUMBER	CENTER FREQUENCY MHz
MOBILE	$1 \leq N \leq 600$	$0.030 (N) + 805.980$
BASE	$1 \leq N \leq 600$	$0.030 (N) + 850.980$

FIG. 7

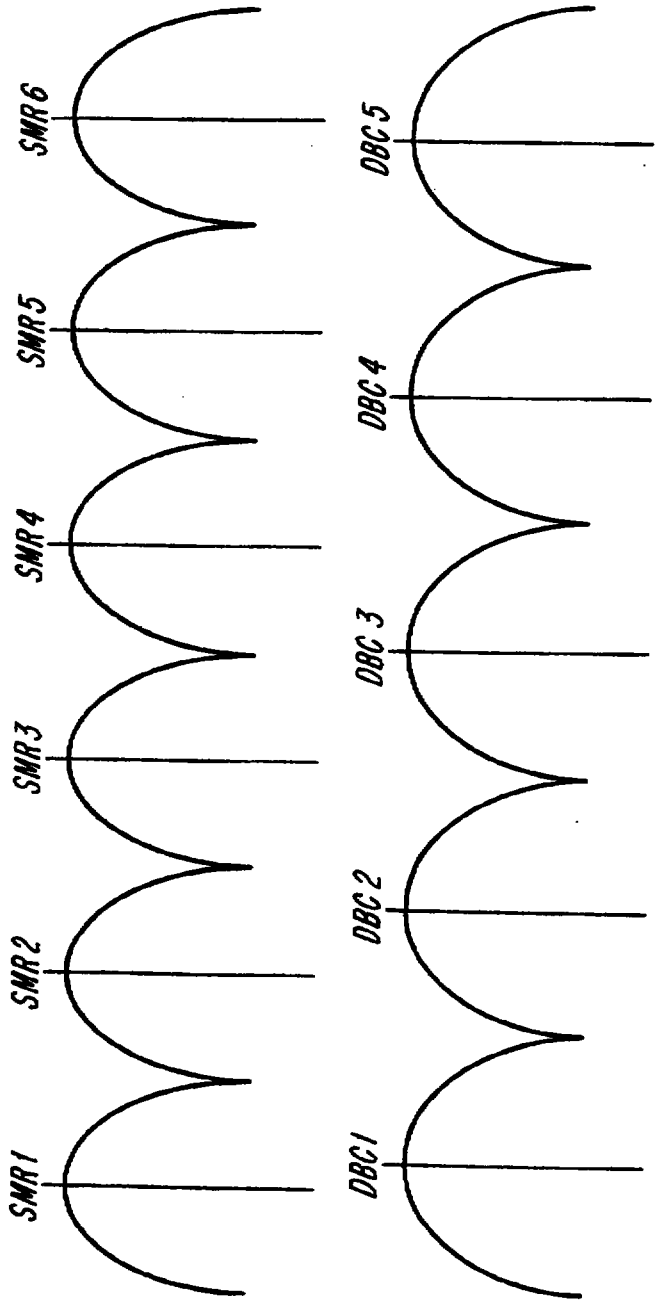


FIG. 8

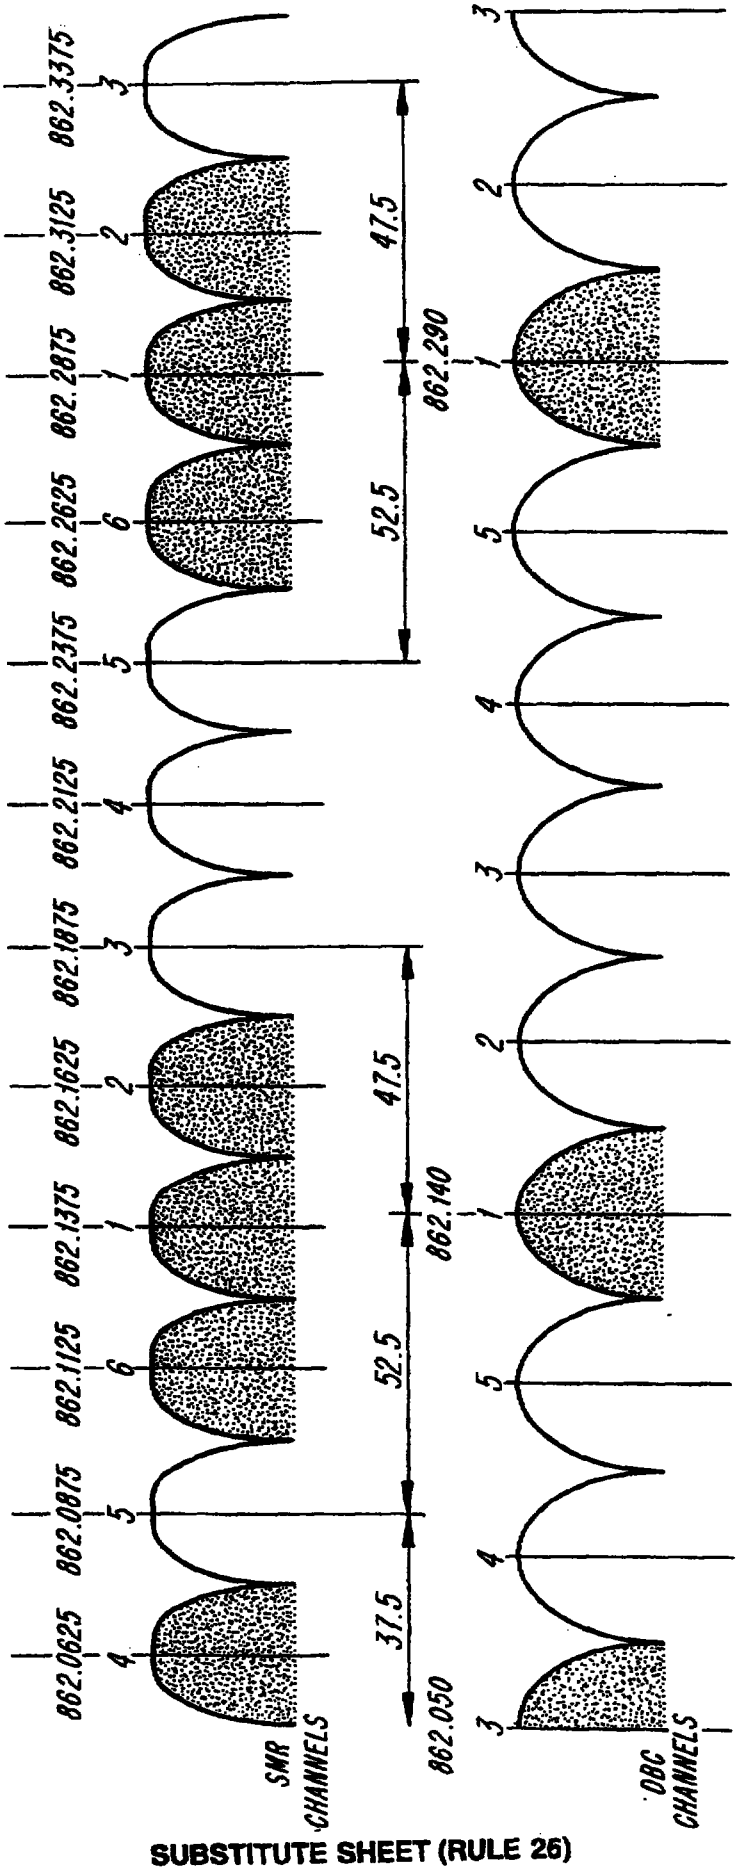

862.0625
862.0875
862.1125
862.1375
862.1625
862.1875
862.2125
862.2375
862.2625
862.2875
862.3125
862.3375
862.050
862.140
862.290
37.5
52.5
47.5
52.5
47.5
SMR CHANNELS
OBC CHANNELS

FIG. 9

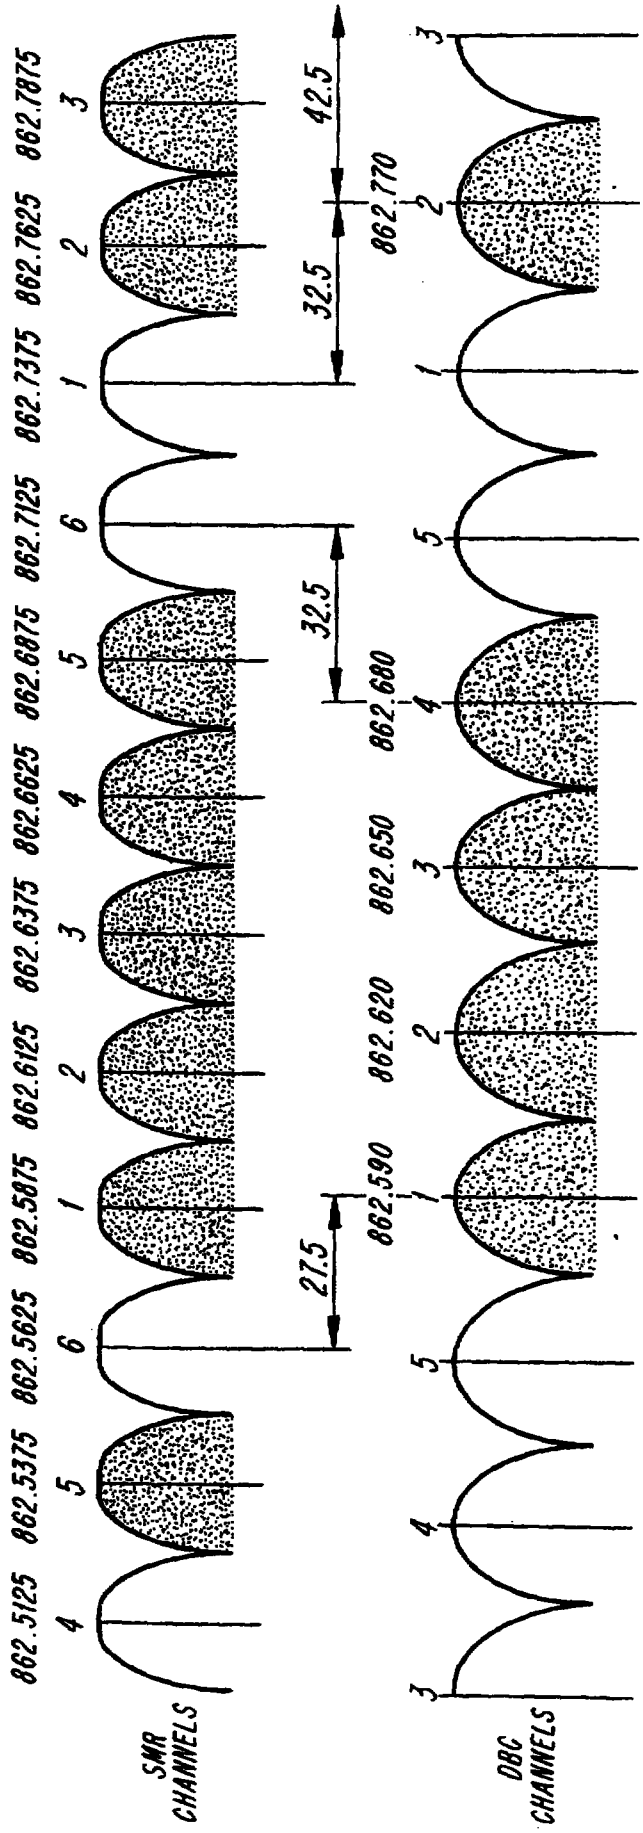

862.5125
862.5375
862.5625
862.5875
862.6125
862.6375
862.6625
862.6875
862.7125
862.7375
862.7625
862.7875
4
5
6
1
2
3
4
5
6
1
2
3
27.5
32.5
32.5
42.5
862.590
862.620
862.650
862.680
862.770
1
2
3
4
5
1
2
3
SMR CHANNELS
DBC CHANNELS

FIG. 10

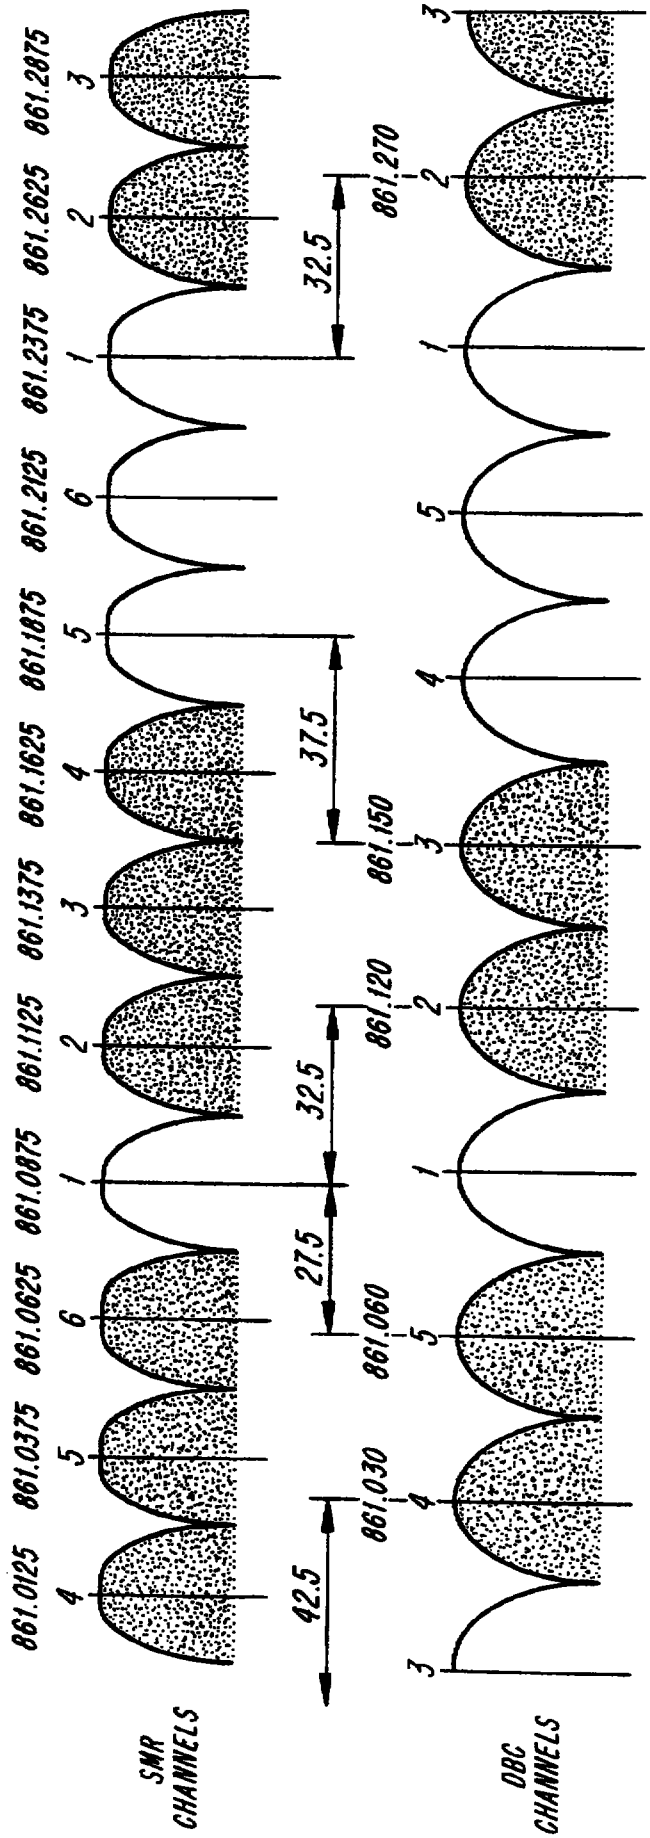

861.0125
861.0375
861.0625
861.0875
861.1125
861.1375
861.1625
861.1875
861.2125
861.2375
861.2625
861.2875
861.030
861.060
861.090
861.120
861.150
861.180
861.210
861.240
861.270
42.5
27.5
32.5
37.5
32.5
SMR CHANNELS
DBC CHANNELS

FIG. 11

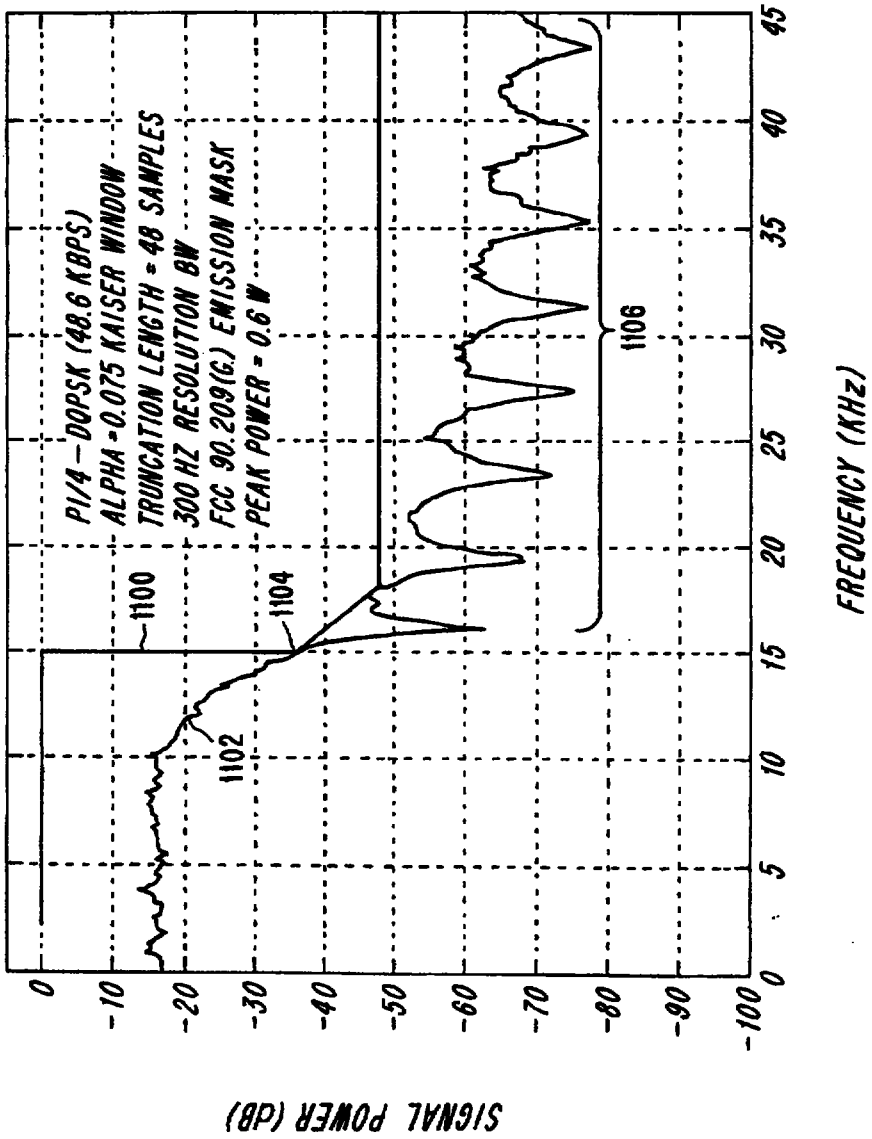
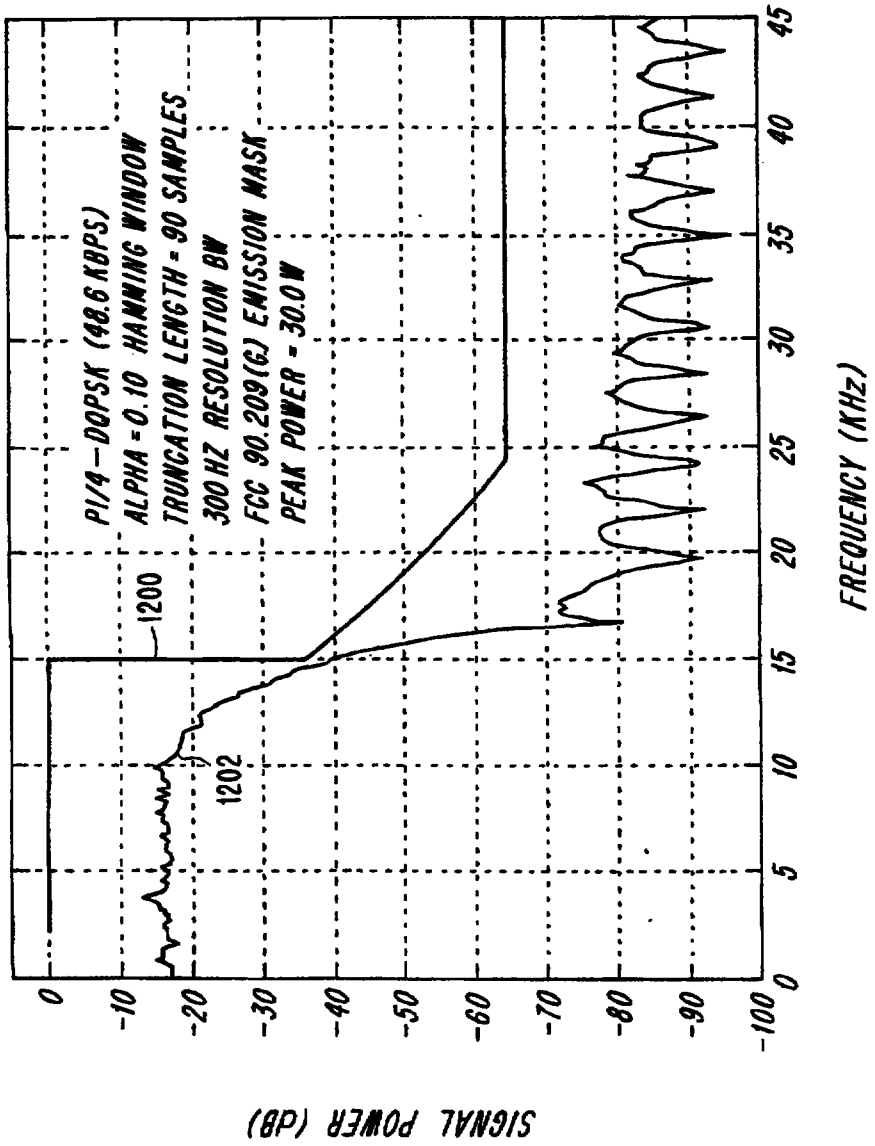

PI/4-DQPSK (48.6 KBPS)
ALPHA = 0.075 KAISER WINDOW
TRUNCATION LENGTH = 48 SAMPLES
300 HZ RESOLUTION BW
FCC 90.209(G) EMISSION MASK
PEAK POWER = 0.6 W
1100
1102
1104
1106
SIGNAL POWER (DB)
0
-10
-20
-30
-40
-50
-60
-70
-80
-90
-100
FREQUENCY (KHz)
0
5
10
15
20
25
30
35
40
45

FIG. 12


PI/4–DQPSK (48.6 KBPS)
ALPHA = 0.10 HANNING WINDOW
TRUNCATION LENGTH = 90 SAMPLES
300 HZ RESOLUTION BW
FCC 90.209(G) EMISSION MASK
PEAK POWER = 30.0 W
1200
1202
SIGNAL POWER (dB)
0
-10
-20
-30
-40
-50
-60
-70
-80
-90
-100
0
5
10
15
20
25
30
35
40
45
FREQUENCY (KHz)

SUMMARY

Accordingly, the present invention provides techniques for adapting the portion of the frequency spectrum allocated to Land Mobile Radio (LMR) for use as downbanded cellular channels. According to one aspect of the invention, a method is provided for using a Land Mobile Radio (LMR) portion of a frequency spectrum, which LMR portion is typically used to provide transmission trunked communication on channels having 25 KHz bandwidths, to instead provide downbanded cellular radiocommunication service. The method comprises the steps of: redefining the LMR portion of the frequency spectrum to provide downbanded cellular channels having 30 KHz bandwidths; allocating, to a network operator, a plurality of the downbanded cellular channels, which downbanded cellular channels are determined based on an amount of contiguous spectrum controlled by the operator; and transmitting signals between stations over an air interface using the allocated downbanded cellular channels to provide radiocommunication services.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing, and other, objects, features and advantages of the present invention will be more readily understood upon reading the following detailed description in conjunction with the drawings in which:

Figures 1A and 1B are tables which show conventional Cellular band channel assignments;

Figures 2A and 2B are tables which apportion the 18 MHz of LMR spectrum into equivalent 25 KHz channel assignments;

Figure 3A illustrates a DBC system according to the present invention that is adjacent to a conventional cellular system

Figure 3B illustrates a DBC system according to the present invention that is coincident with a conventional cellular system;

Figure 4 is a block diagram of a portion of an exemplary radio communication system according to the present invention;

Figure 5 illustrates one hypothetical mapping of conventional 25 KHz LMR channels into 30 KHz channels;

the downlink output transmission spectrum 1202.

The above-described exemplary embodiments are intended to be illustrative in all respects, rather than restrictive, of the present invention. Although the foregoing exemplary embodiments have been described in terms of base and mobile stations, the present invention can be applied to any radiocommunication system. For example, satellites could transmit and receive data in communication with DBC remote devices, including portable units, personal digital assistants, etc.

Moreover, although the present invention has been described primarily in terms of communicating within the LMR spectrum, the present invention is also intended to be used in multiple hyperbands, e.g,. in a dual-mode DBC and Cellular band mobile phone. For example, the mobile station can be implemented to operate in the A-side cellular band and a portion of the LMR band. This DBC mobile station has the advantage of being able to use existing cellular networks which allow a DBC network operator to offer a nationwide roaming footprint. Readers interested in aspects of multiple hyperband capable systems are referred to U.S. Patent Application Serial No. 08/425,051 entitled "Multiple Hyperband Mobile and Base Stations" to Krister Raith filed on April 19, 1995, the disclosure of which is incorporated here by reference.

CLAIMS:

1. A method for using a Land Mobile Radio (LMR) portion of a frequency spectrum, which LMR portion is typically used to provide transmission trunked communication on channels having 25 KHz bandwidths, to instead provide downbanded cellular radiocommunication service, the method comprising the steps of:

redefining said LMR portion of the frequency spectrum to provide downbanded cellular channels having 30 KHz bandwidths;

allocating, to a network operator, a plurality of said downbanded cellular channels, which downbanded cellular channels are determined based on an amount of contiguous spectrum controlled by said operator; and

transmitting signals between stations over an air interface using said allocated downbanded cellular channels to provide radiocommunication services.

2. The method of claim 1, wherein said step of redefining further comprises the step of:

defining channel center frequencies for said downbanded cellular channels according to the following relationship:

Transmitter	Channel Number	Center Frequency MHz
Mobile	$1 \leq N \leq 600$	0.030 (N) + 805.980
Base	$1 \leq N \leq 600$	0.030 (N) + 850.980

3. The method of claim 2, wherein said step of allocating further comprises the step of:

allocating those defined downbanded cellular channels which are encompassed by said contiguous spectrum controlled by said operator.

4. The method of claim 1, wherein said step of transmitting signals using said allocated downbanded cellular channels further comprises the step of:

9805175 -8
IPDS's
copy

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04Q 7/36 — A1

(11) International Publication Number: WO 97/36445

(43) International Publication Date: 2 October 1997 (02.10.97)

(21) International Application Number: PCT/US97/03808

(22) International Filing Date: 12 March 1997 (12.03.97)

(30) Priority Data: 08/622,311 — 27 March 1996 (27.03.96) — US

(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).

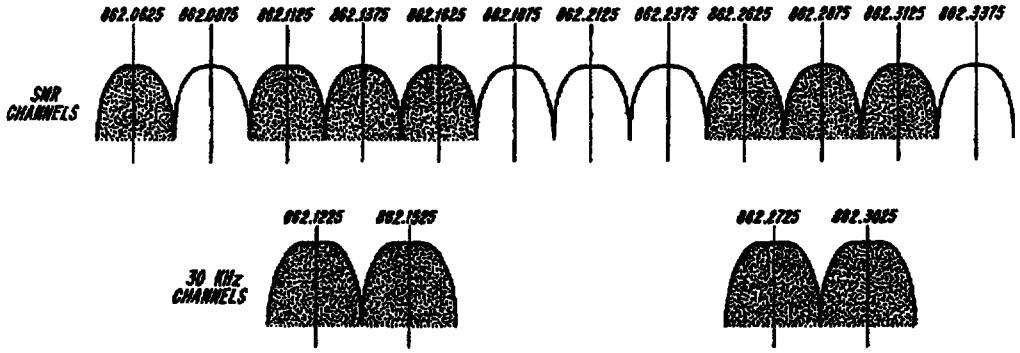
(72) Inventor: PRZELOMIEC, Thomas, A.; 5808 Rhonda Road, Lynchburg, VA 24502 (US).

(74) Agents: GRUDZIECKI, Ronald, L. et al.; Burns, Doane, Swecker & Mathis L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: BAND CONVERTED CELLULAR COMMUNICATION SYSTEMS AND METHODS



(57) Abstract

The present invention provides techniques for adapting the portion of the frequency spectrum allocated to Land Mobile Radio (LMR) for use as downbanded cellular channels. These downbanded cellular channels can be employed, for example, either to supplement a cellular operator's system capacity or as a stand alone cellular-style system which can provide complementary geographic coverage which may, for example, bridge existing cellular systems. According to a first aspect of the present invention, the conventional channelization of the LMR spectrum is redefined in a manner which provides significant advantages. More specifically, for every six originally specified, 25 KHz LMR channels, five new 30 KHz DBC channels are specified. In this way, complete compatibility with cellular systems, e.g., allowing roaming between cellular and DBC systems, is achieved according to the present invention.