



- (51) International Patent Classification:
H04N 19/593 (2014.01)
- (21) International Application Number:
PCT/CN2019/104254
- (22) International Filing Date:
03 September 2019 (03.09.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/726,419 03 September 2018 (03.09.2018) US
- (71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian, Long-
gang District, Shenzhen, Guangdong 518129 (CN).
- (72) Inventors: **WANG, Biao**; c/o Huawei Technologies Dues-
seldorf GmbH, Riesstr.25, 80992 Munich (DE). **ESEN-
LIK, Semih**; c/o Huawei Technologies Duesseldorf GmbH,

Riesstr.25, 80992 Munich (DE). **KOTRA, Anand Meher**;
c/o Huawei Technologies Duesseldorf GmbH, Riesstr.25,
80992 Munich (DE). **GAO, Han**; c/o Huawei Technolo-
gies Duesseldorf GmbH, Riesstr.25, 80992 Munich (DE).
CHEN, Jianle; 2330 Central Expressway, Santa Clara, Cal-
ifornia 95050 (US). **ZHAO, Zhijie**; c/o Huawei Technolo-
gies Duesseldorf GmbH, Riesstr.25, 80992 Munich (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (54) Title: METHOD AND APPARATUS FOR INTRA PREDICTION

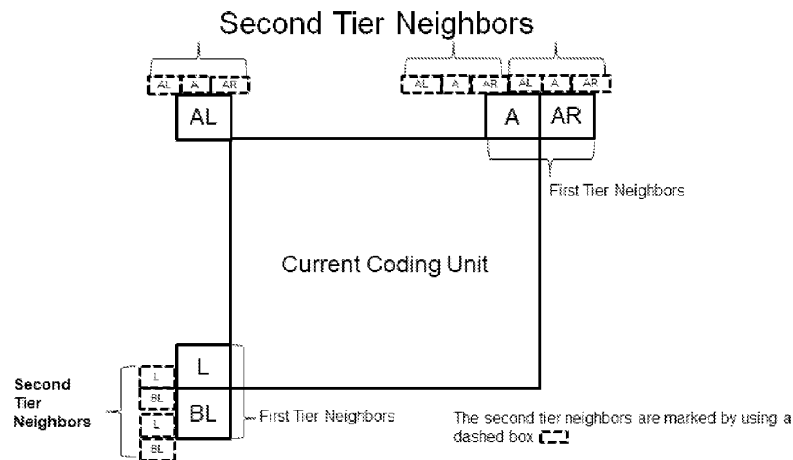


Fig. 6

(57) Abstract: A decoding method and a decoder for decoding a current block of a video is provided, wherein the decoding method comprises: obtaining a value of a Most Probable Modes, MPM, flag for the current block from a bitstream; obtaining an MPM index for the current block from the bitstream, when the value of the MPM flag indicates that an intra prediction mode for the current block is an intra prediction mode comprised in an MPM set of intra prediction modes; obtaining a value of an intra prediction mode for the current block, based on the MPM index and the MPM set for the current block; wherein when an intra prediction mode of a left neighboring block of the current block is a Planar mode, and an intra prediction mode of an above neighboring block of the current block is a Planar mode, the MPM set of prediction modes comprises: a Planar mode, a DC mode, a Vertical mode, a Horizontal mode, an intra prediction mode corresponding to the Vertical mode with a first offset, and an intra prediction mode corresponding to the Vertical mode with a second offset.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))