

FIG. 1

100

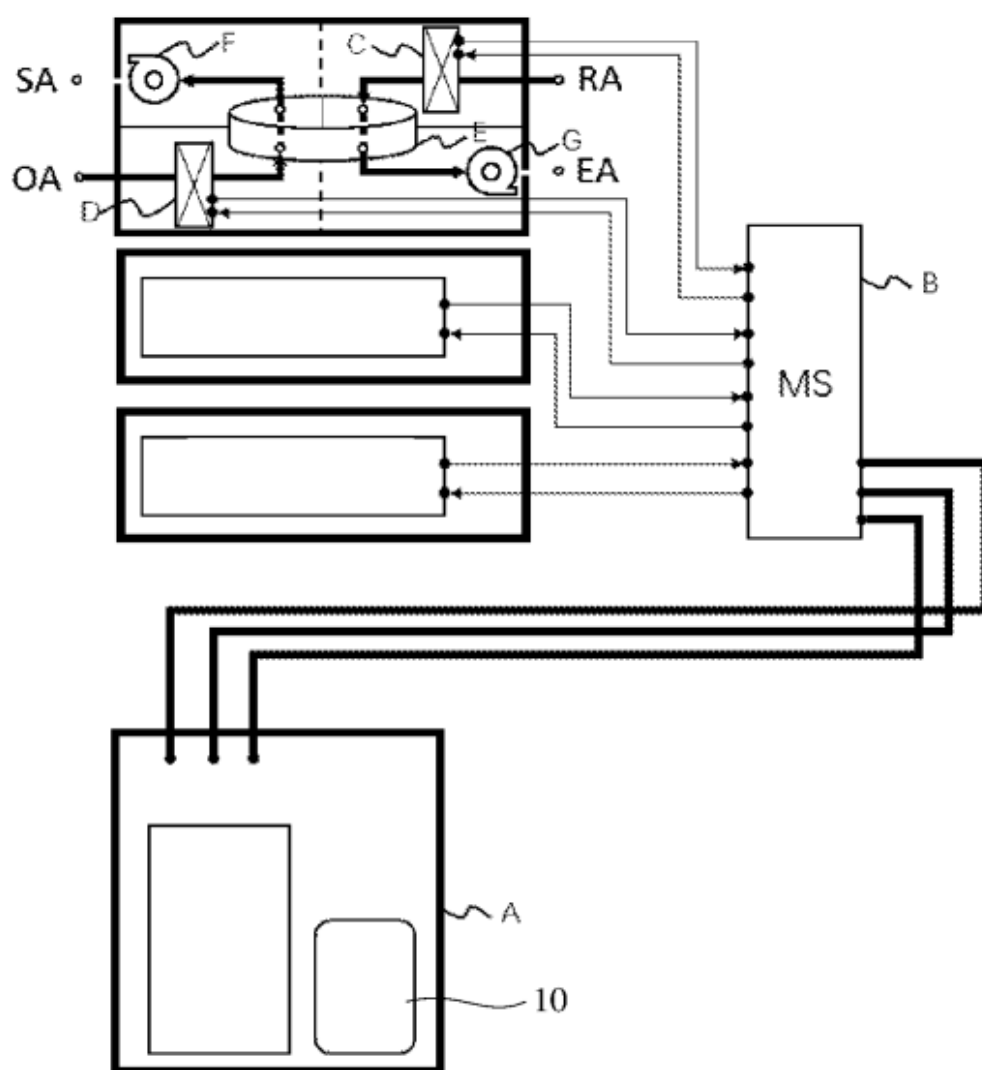


FIG. 2

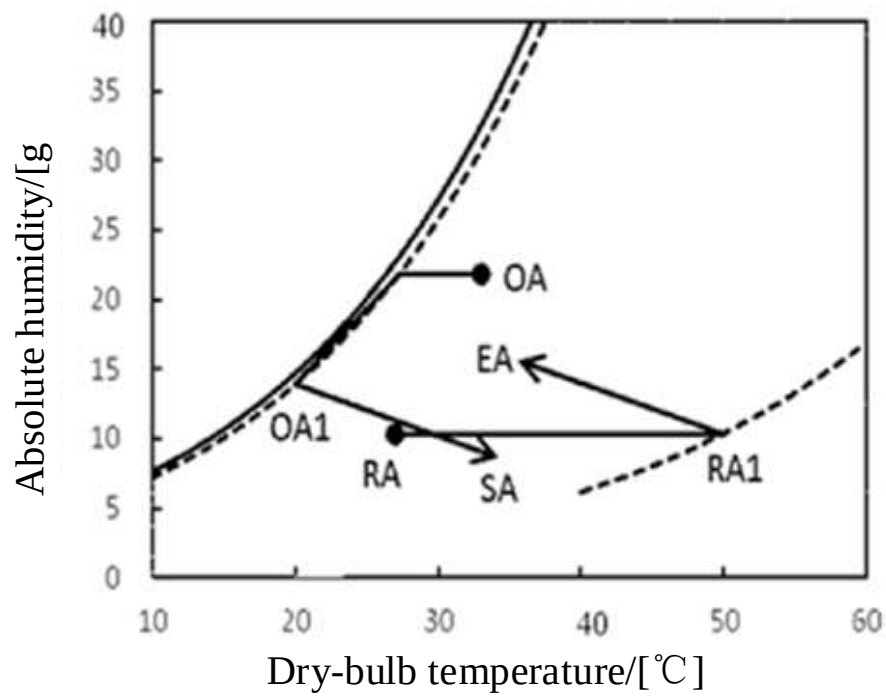


FIG. 3

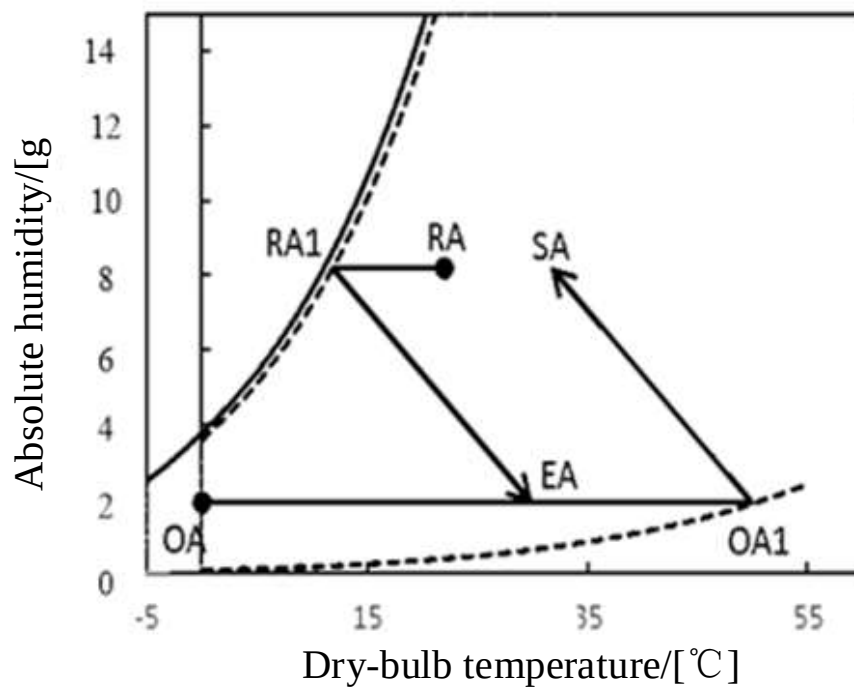


FIG. 4

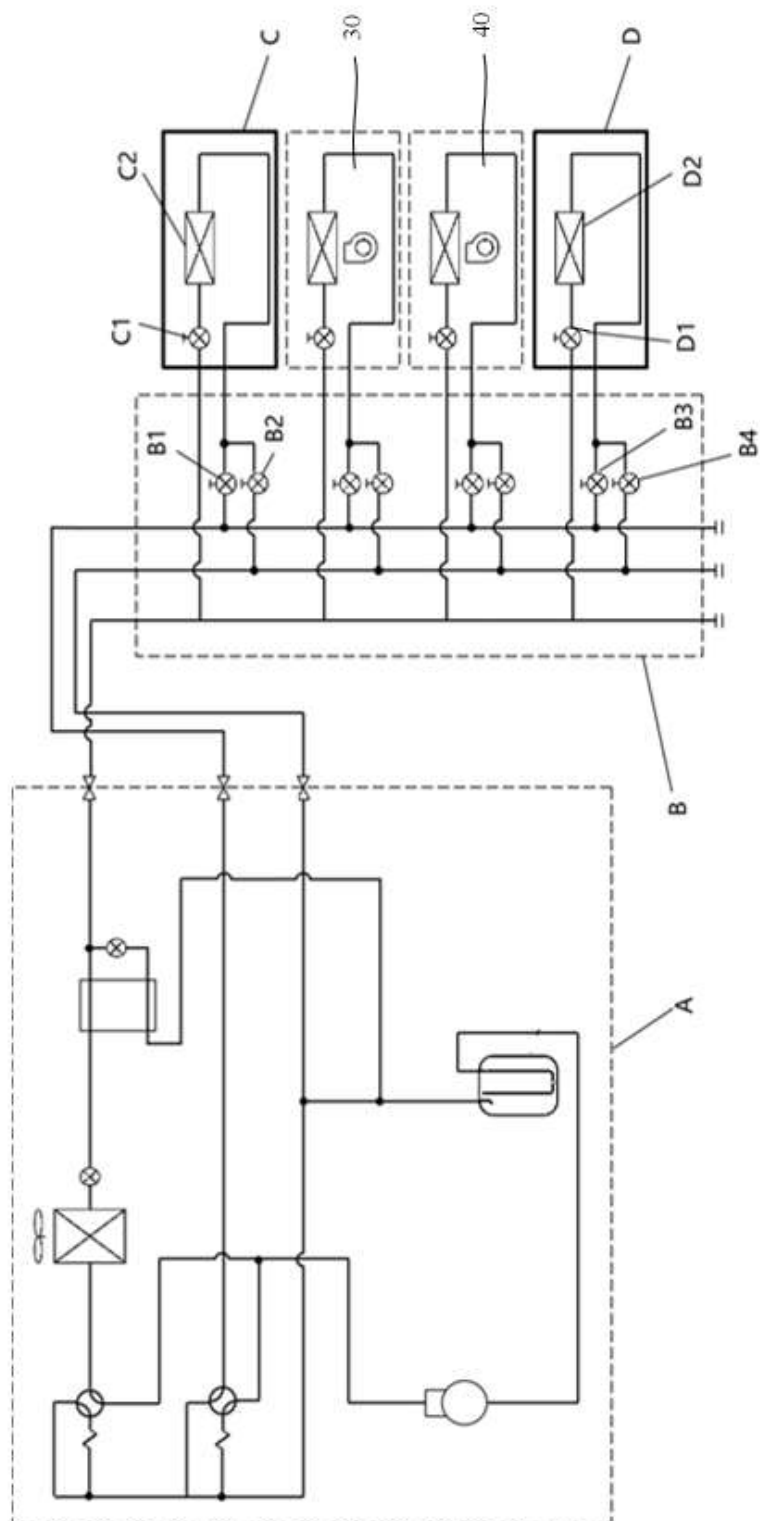


FIG. 5

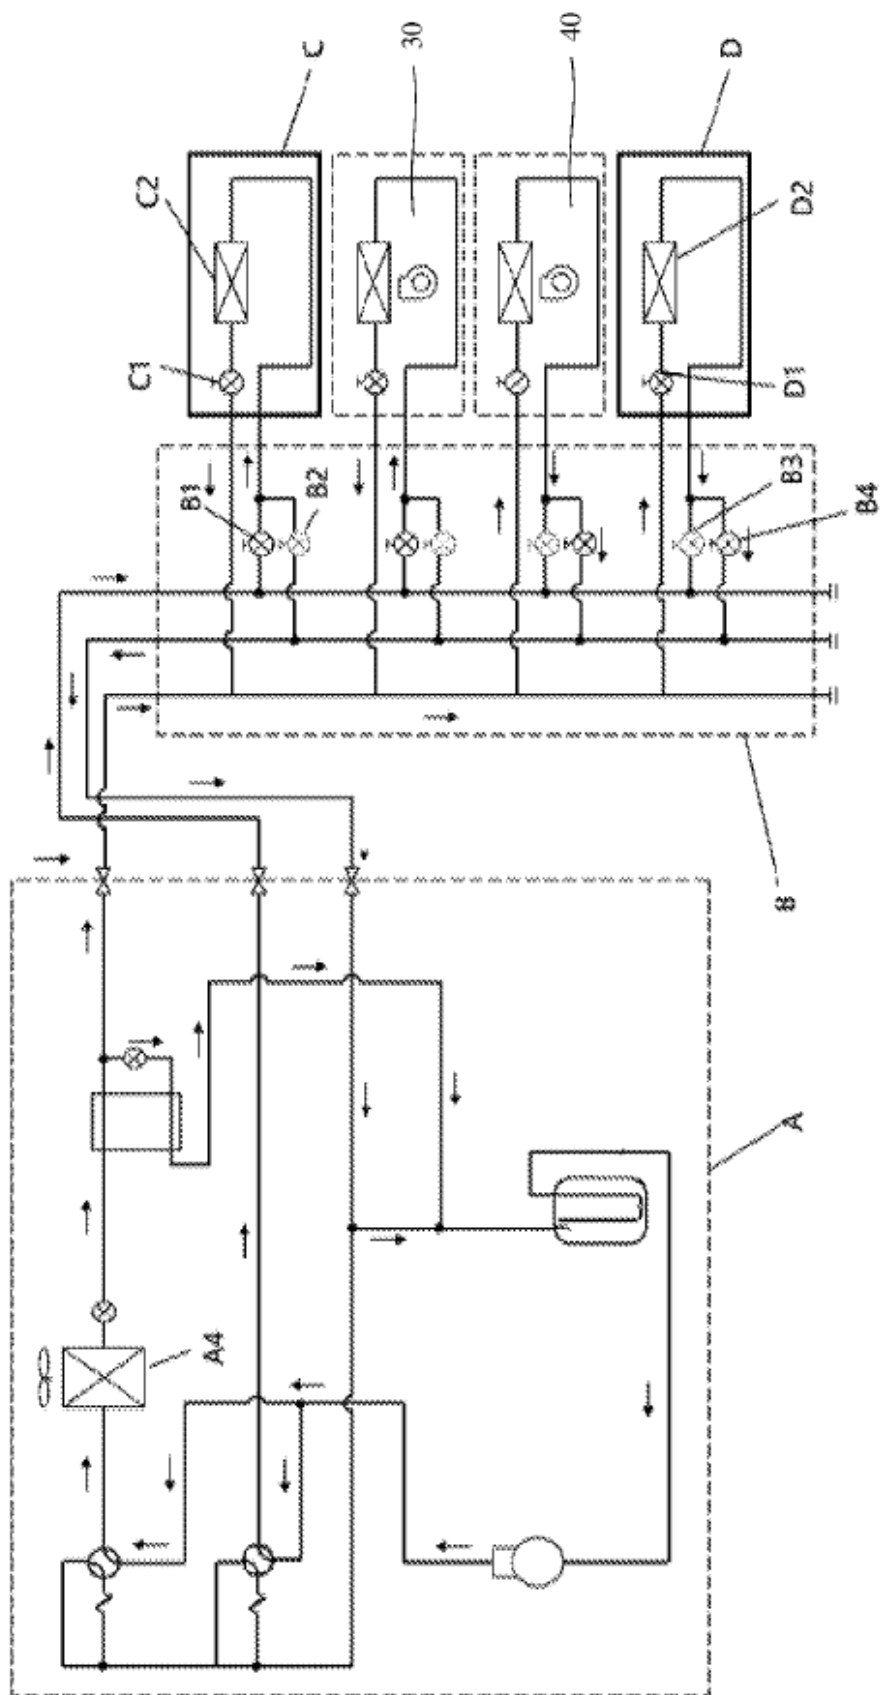


FIG. 6

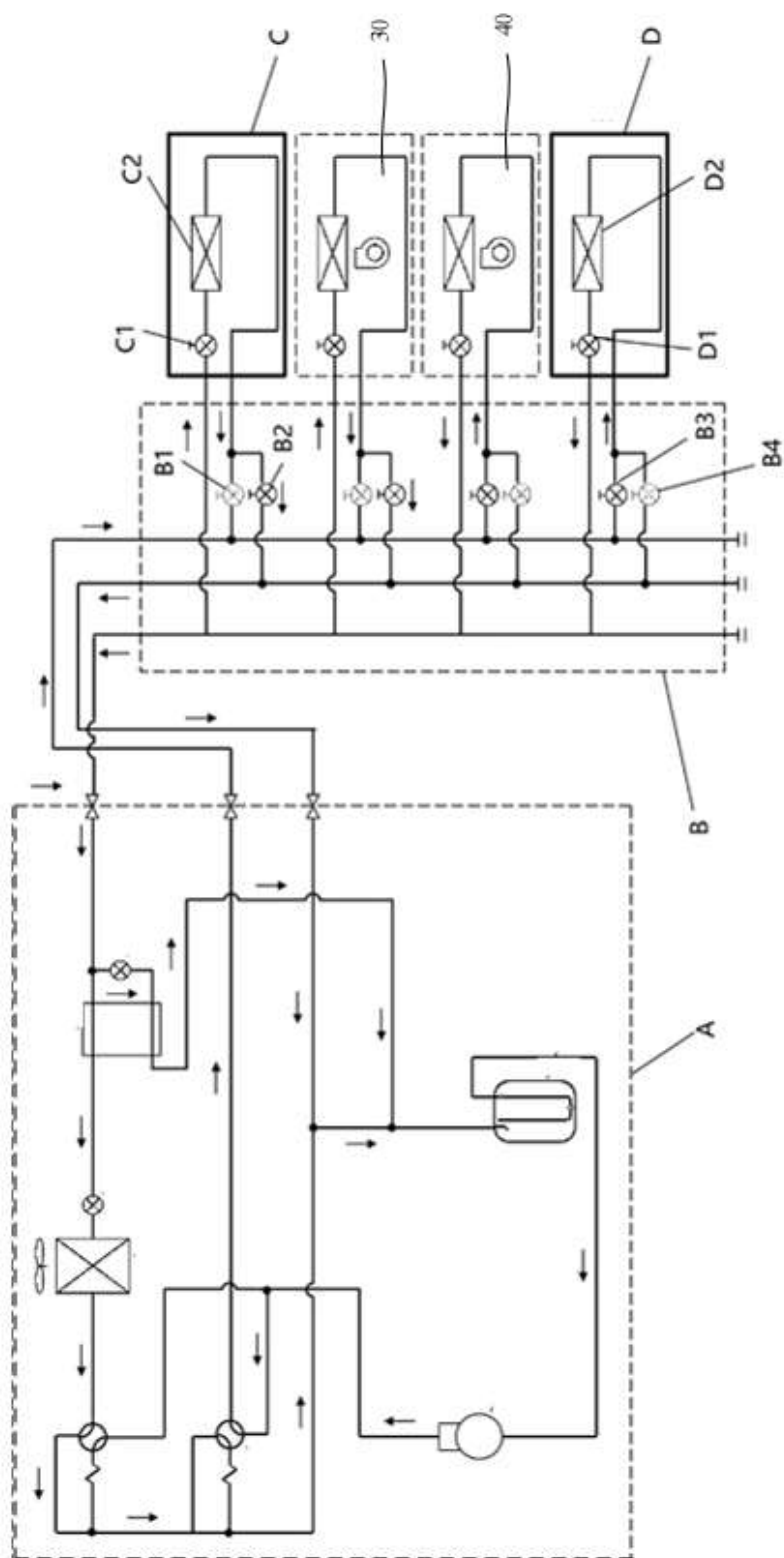


FIG. 7

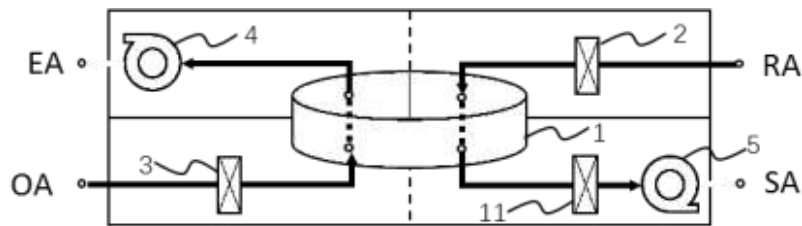


FIG. 8

Obtaining target humidity and real-time humidity of the air conditioning system S10

Controlling the first heat exchanger of the air conditioning system to operate in a condensation mode and the second heat exchanger of the air conditioning system to operate in an evaporation mode, when the real-time humidity is greater than the target humidity and a fresh air system of the air conditioning system is in a fresh air dehumidification mode S12

Controlling the first heat exchanger of the air conditioning system to operate in the evaporation mode and the second heat exchanger of the air conditioning system to operate in the condensation mode, when the real-time humidity is smaller than the target humidity and the fresh air system is in a fresh air humidification mode S14

FIG. 9

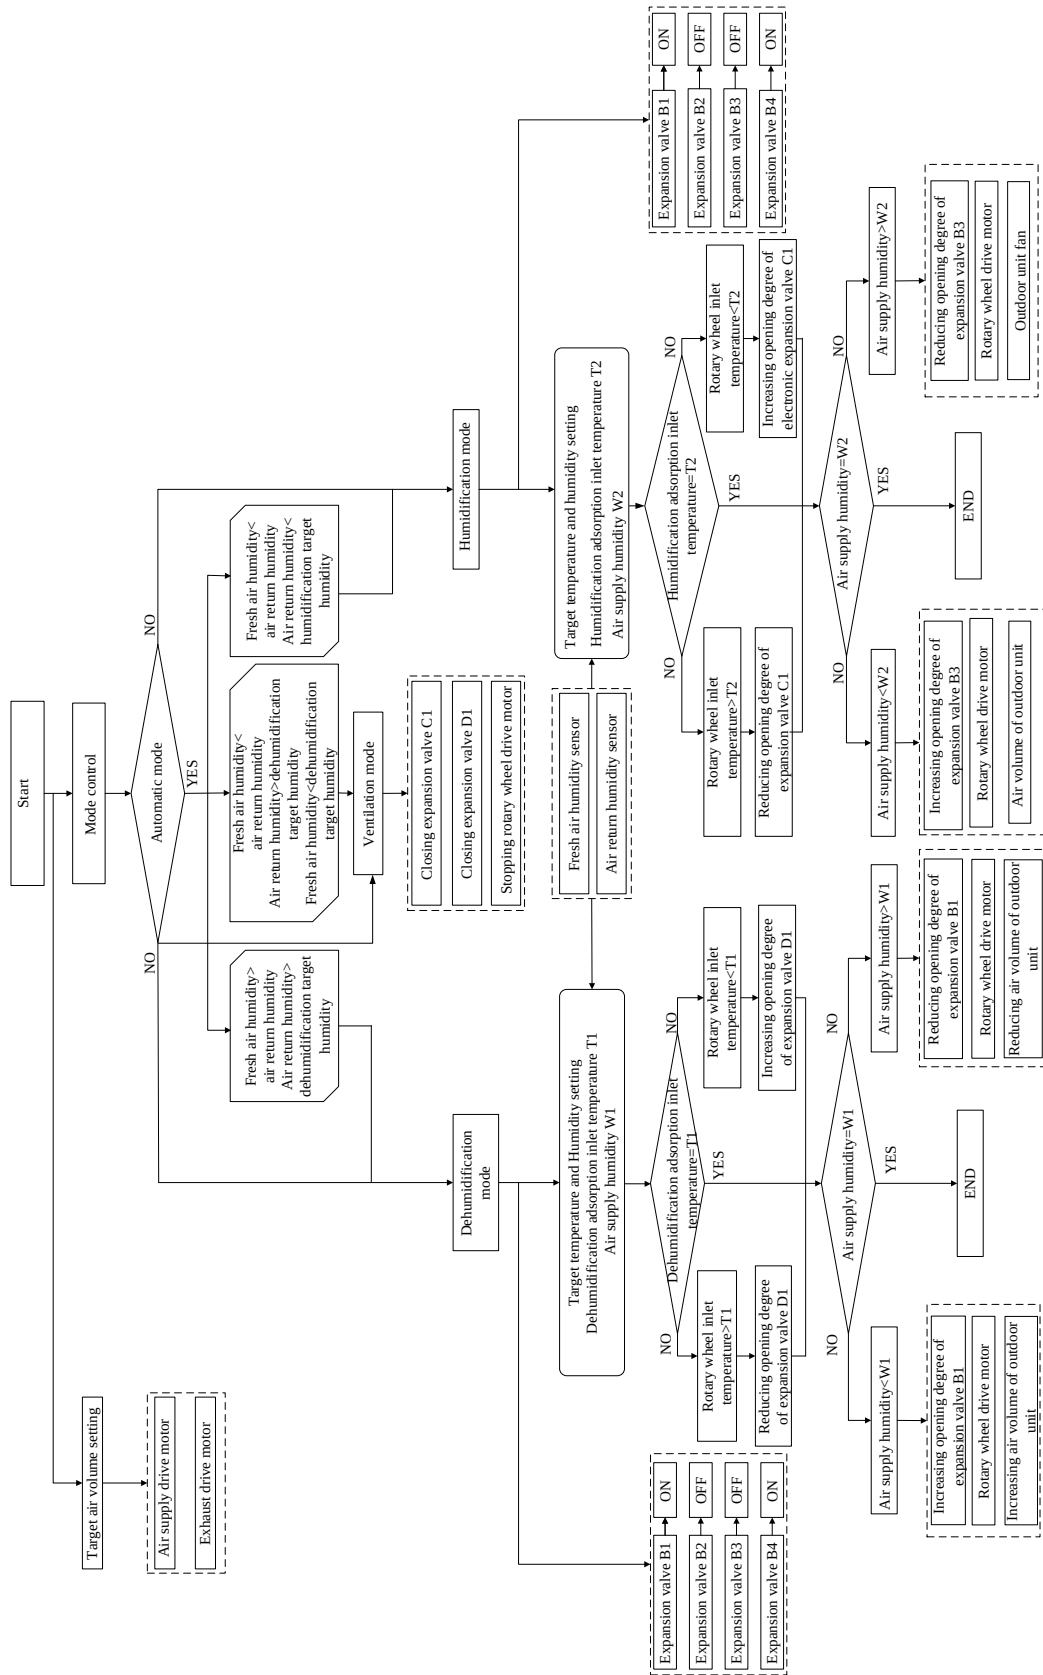


FIG. 10

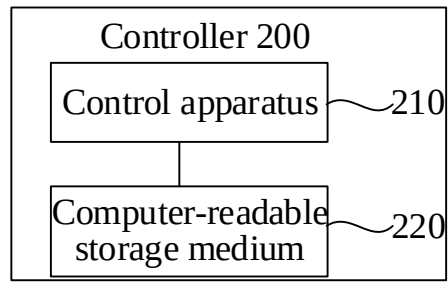


FIG. 11

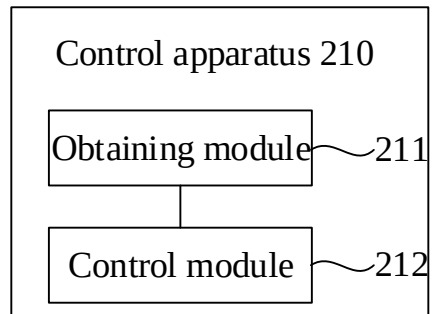


FIG. 12

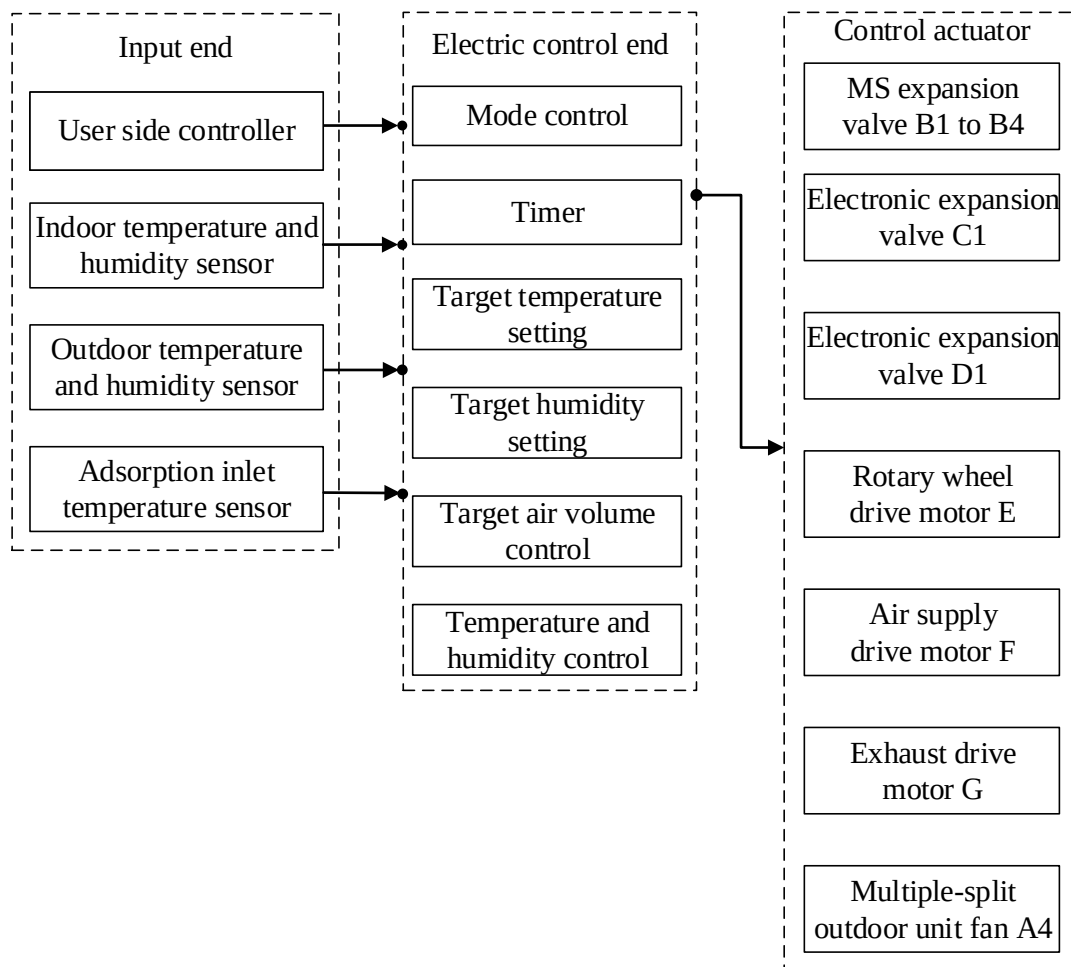


FIG. 13