

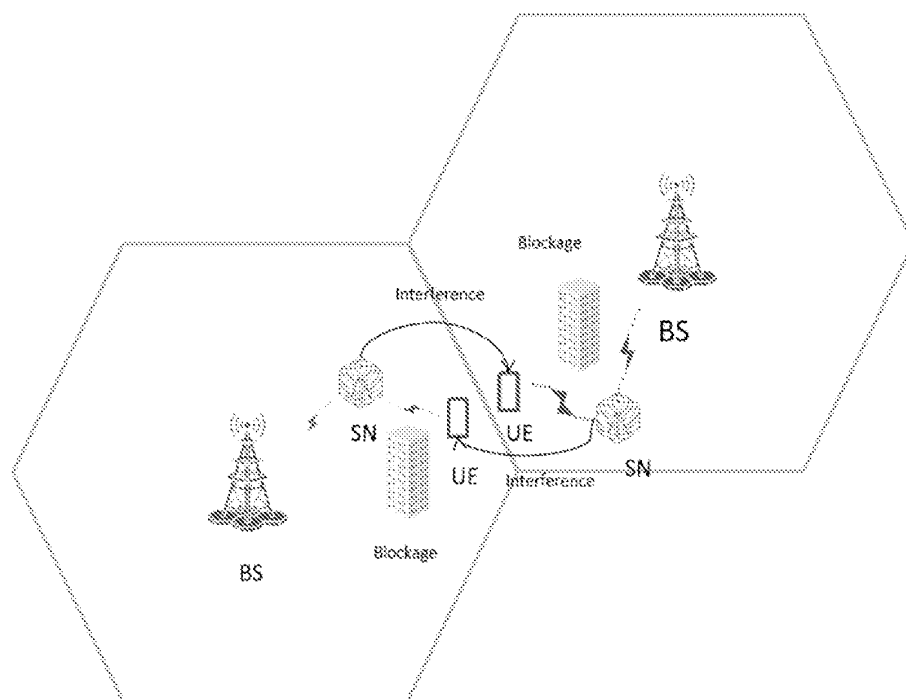


FIG. 1

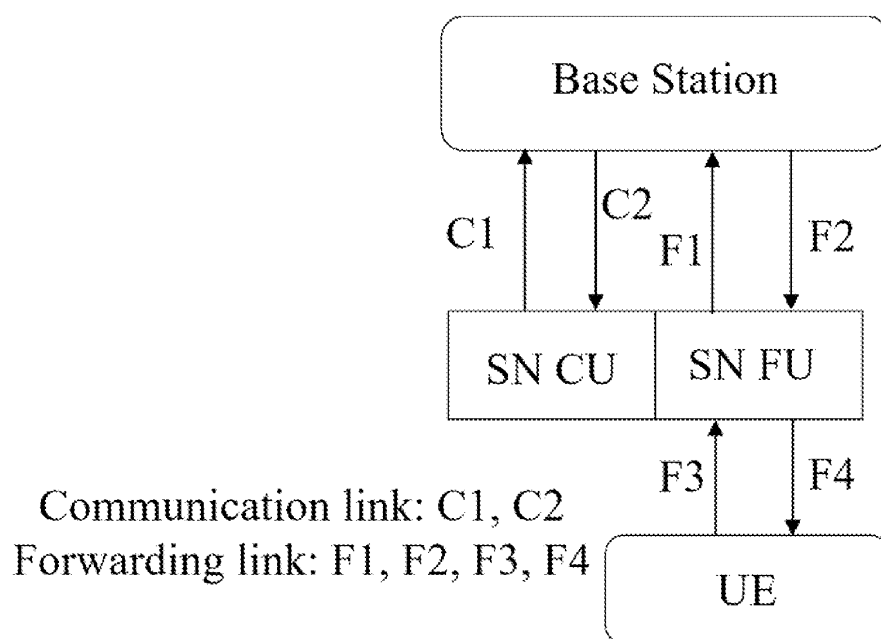


FIG. 2

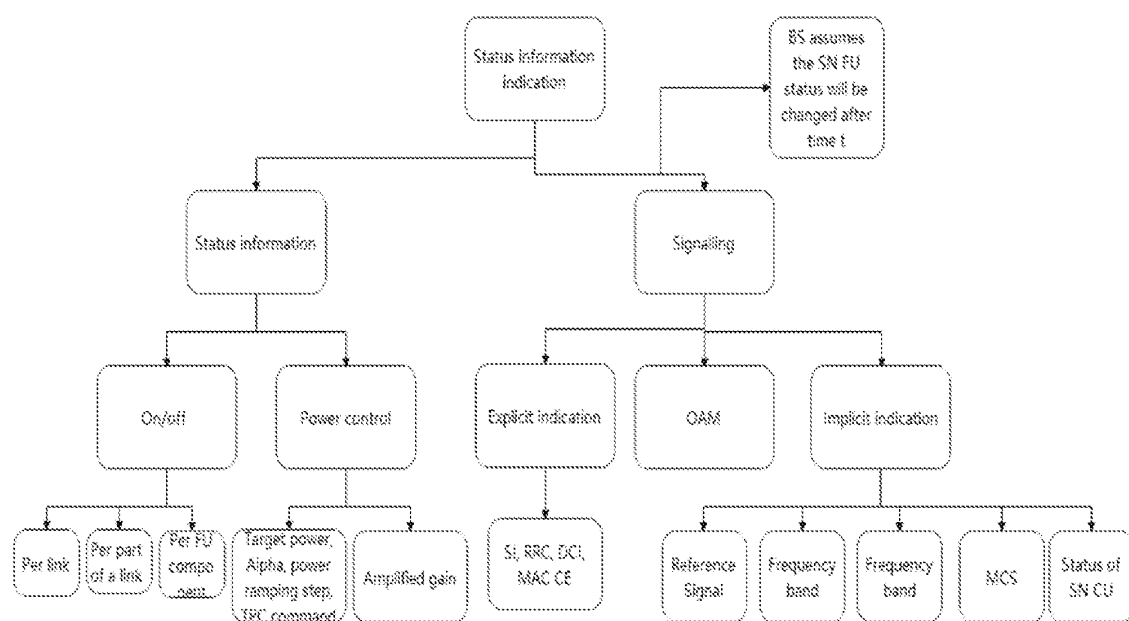


FIG. 3

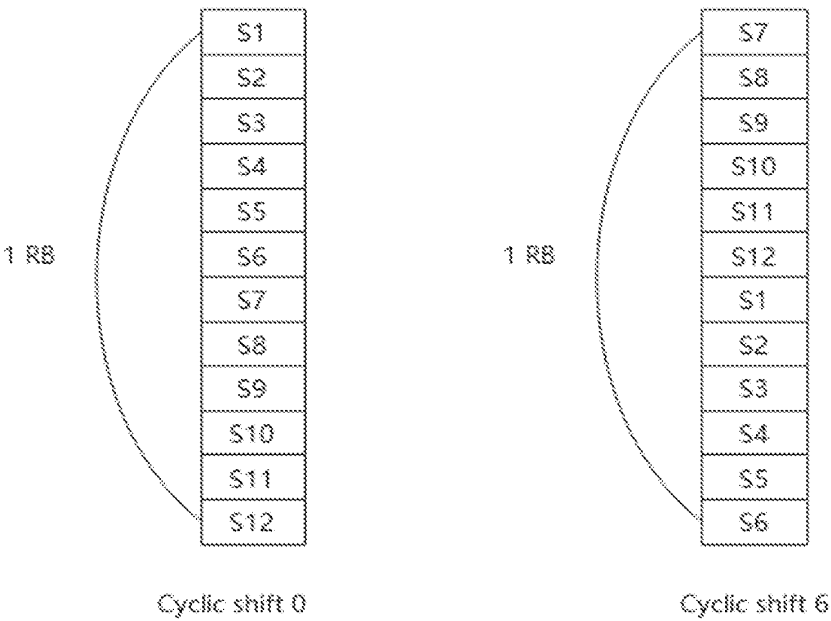


FIG. 4

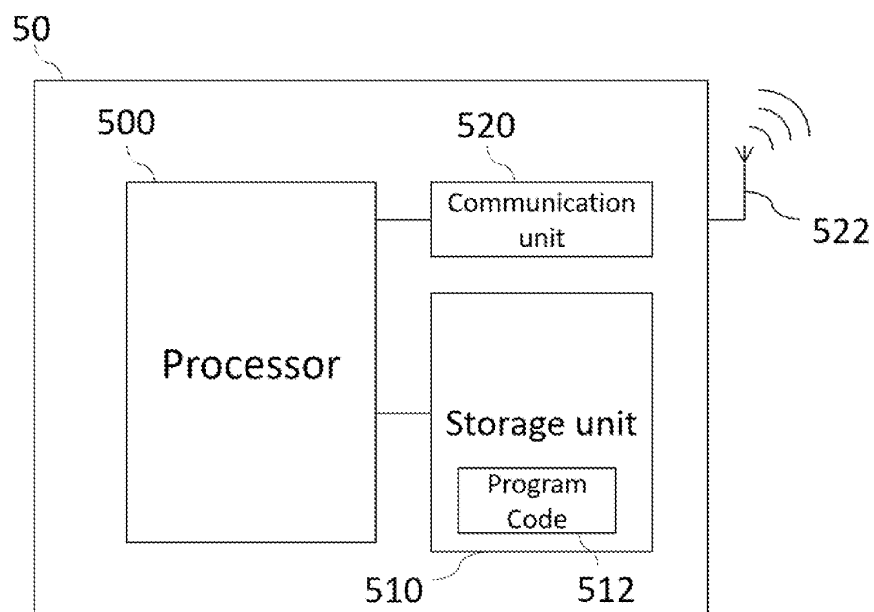


FIG. 5

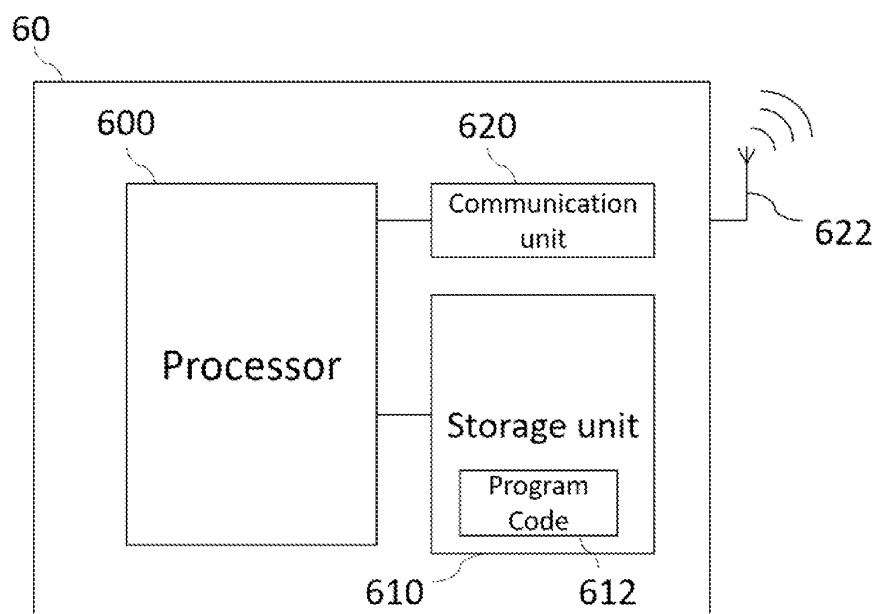


FIG. 6

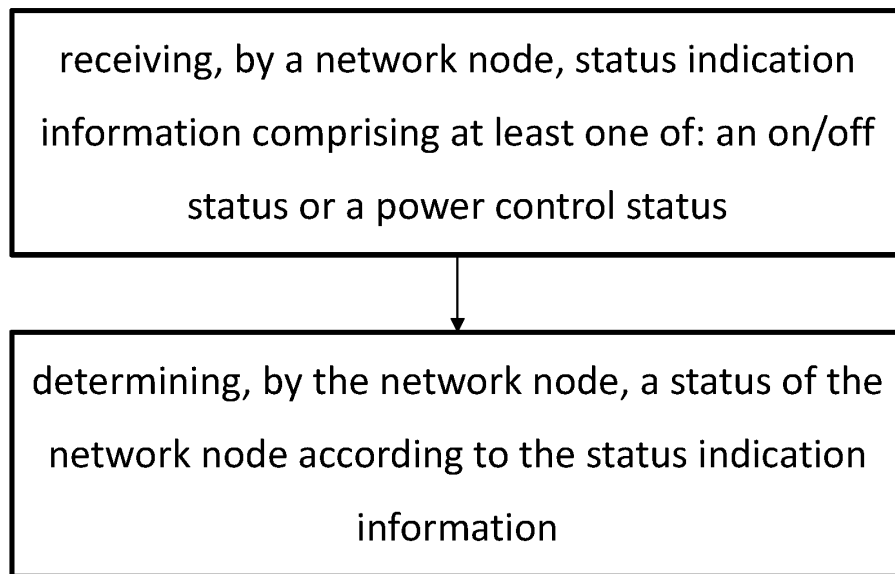


FIG. 7

transmitting, by a wireless communication node to a network node, status indication information to determine a status of the network node according to the status indication information

FIG. 8