



(51) International Patent Classification:

G06F 21/78 (2013.01) *G06K 7/10* (2006.01)
G06K 19/07 (2006.01)

(21) International Application Number:

PCT/US2015/050928

(22) International Filing Date:

18 September 2015 (18.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/052,321 18 September 2014 (18.09.2014) US

(71) Applicant: **BOOZ ALLEN & HAMILTON** [US/US];
8283 Greensboro Drive, McLean, Virginia 22102 (US).(72) Inventors: **MYERS, Gary Jason**; 3805 Acosta Road,
Fairfax, Virginia 22031 (US). **WELSH, Matthias**; 1443
Florida Ave NW, Washington, District of Columbia 20009
(US). **KNIGHT, Robert, Wayne, II**; 7614 NE 169th
Lane, Kenmore, Washington 98028 (US). **SCHAEFER,**

Timothy; 5375 15th Street SE, Rochester, Minnesota
55904 (US).

(74) Agents: **BENKE, Derek P.** et al.; Buchanan Ingersoll &
Rooney PC, P.O. Box 1404, Alexandria, Virginia 22313-
1404 (US).


(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR LOCATION-BASED SECURITY

Fig. 10

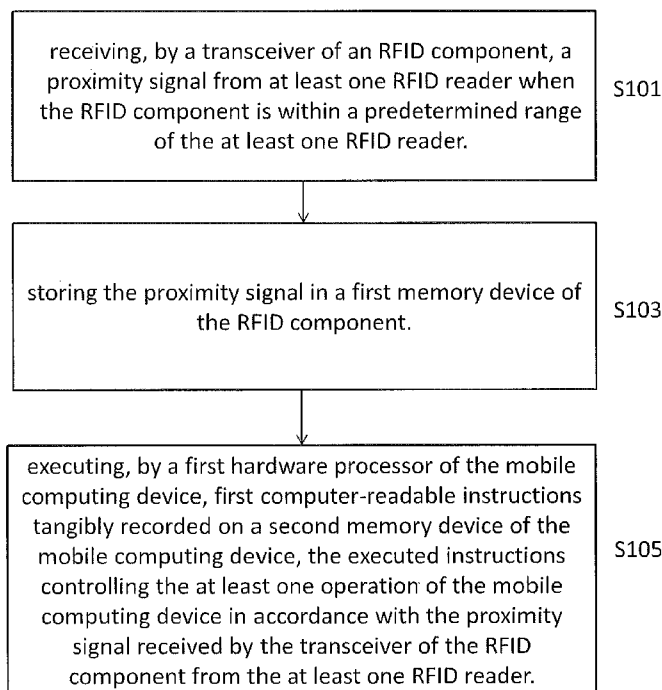

(57) **Abstract:** A mobile computing device, including: a first memory device having first computer-readable instructions tangibly recorded thereon; a first hardware processor configured to execute the first computer-readable instructions recorded on the first memory device; and an RFID component that includes a transceiver configured to receive a proximity signal from at least one RFID reader when the RFID component is within a predetermined range of the at least one RFID reader, and a second memory device configured to store the proximity signal, wherein the first hardware processor is configured to, upon executing the instructions recorded on the first memory device, control at least one operation of the mobile computing device in accordance with the proximity signal received by the transceiver of the RFID component from the at least one RFID reader.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*