This Sheet Has Been Replaced

2286481

METHOD AND APPARATUS FOR SERVO POSITIONING IN A DIRECT ACCESS STORAGE DEVICE

The present invention relates generally to an actuator positioning system in a direct access storage device (DASD) and more particularly to a phase modulated servo positioning method and apparatus for use with narrow transducer heads in a disk file.

Computers often include auxiliary memory storage units having media on which data can be written and from which data can be read for later use. Disk drive units incorporating stacked, commonly rotated rigid magnetic disks are used for storage of data in magnetic form on the disk surfaces. Data is recorded in concentric, radially spaced data information tracks arrayed on the surfaces of the disks. Transducer heads driven in a path toward and away from the drive axis write data to the disks and read data from the disks.

All DASD units must have a method to position each data head over the proper radial location to write a track and again, to position it very close to the same location to read the track. With the higher level files using a voice coil type of actuator, a feedback mechanism must be provided to locate and stably hold the heads on a given track. Typically, track accessing and track following are provided utilizing a magnetically written pattern in the DASD unit. A dedicated servo system employs one surface of one of the disks in the DASD on which to have all the tracking and access information. A sector servo system uses small portions of tracks between each or between several sectors on each track of each data surface to provide the tracking and access information. A hybrid servo system uses both to obtain advantages of each type of servo.

Magneto-resistive (MR) heads are a great advancement in read/write technology for DASD. One of the key advantages of MR heads is the use of separate elements for reading and writing. This allows the writing element to be wide, almost a full track pitch in width, and the reading element to be narrow. This write wide, read narrow capability eases the track misregistration (TMR) requirements on the servo system by effectively increasing the width of the soft-error rate (SER) bathtubs by the difference in widths between the read and write elements.

Servo tracks are typically written on a 1/2 track pitch. A traditional phase pattern is written so that the phase of each burst

This Sheet Has Been Replaced



changes 22.5 degrees for each written servo track. For increasing track types, the phase is advanced in bursts 1 and 3 and retarded in burst 2. In this fashion, the phase between burst 1 and burst 2 changes 45 degrees for each servo track written. This means that a 5 Mhz pattern can be written with a 80 Mhz clock. In this case the 5 Mhz period consists of 16, 80 Mhz clocks and the phase of each burst is changed by one bit for each servo track written. Then the difference in phase between the bursts repeats in eight servo tracks. The eight servo tracks written on a 1/2 track pitch correspond to four data tracks or cylinders.

To optimize the SER, a reading transducer width that is less than 50% of the track pitch is required. With reading elements less than the width of a single servo track, position linearity becomes unacceptably poor with the conventional 1/2 track pitch servo tracks. Linearity error can be improved by writing narrower tracks. For example, the phase pattern written on a 1/4 track pitch would provide acceptable position linearity; however, this would double the time required for servo writing and would be prohibitively expensive for a sector servo file.

If a conventional servo pattern is written on a narrow track pitch, for example, 3/8 track pitch, the position linearity requirements will be satisfied, but the pattern will repeat in three data cylinders instead of four. This means that the position error signal (PES) extends +/-1.5 tracks instead of +/-2 tracks before the PES repeats. When seeking, this 50% loss in range is significant. Seek velocities can be as high as 40 or 50 tracks/sample. This means that position must be estimated 50 tracks away; therefore, the PES error must never be greater than 1.5 tracks out of 50, or 3%. If the error is greater than this amount, the estimator algorithm may converge on the wrong position and velocity and be off by modulo three tracks. As a result a conventional servo pattern with a narrow track pitch pattern is unacceptable.

It is a principal object of the present invention to provide a phase modulated servo method and apparatus for use with narrow transducer heads.

In brief, the objects and advantages of the present invention are achieved by a phase modulated servo method and apparatus to provide acceptable position linearity for servo positioning with a narrow transducer head in a disk file. The disk file includes at least one disk mounted for rotation about an axis and the disk has at least one disk

This Sheet Has Been Replaced



surface for storing data and has a transducer mounted for movement across the disk surface for writing to and for reading data and servo patterns from the disk surface. The transducer includes a read element and a write element. The read element has a width less than the write element and the read element width is less than 1/2 of a data cylinder. A servo pattern is written on the data disk surface having a track pitch of less than 1/2 of a data cylinder and the servo pattern repeats in a selected binary number of data cylinders.

The present invention can best be understood from the following detailed description of embodiments of the invention illustrated in the drawing, wherein:

FIG. 1 is a schematic and block diagram of a data storage disk file;

FIG. 2 is a diagram showing the accessing mechanism for a single disk surface of the apparatus of FIG. 1;

FIG. 3 is a block diagram representation illustrating apparatus for carrying out a servo positioning method in the data storage disk file of FIG. 1; and

FIG. 4 is a chart illustrating a servo pattern written on 1/3 track pitch.

In FIG. 1 there is shown a partial schematic block diagram of parts of a data storage disk file 10 including a data storage medium generally designated as 12 and a control unit generally designated as 14. In the preferred embodiment of this invention, the data storage medium 12 is embodied in a rigid magnetic disk drive unit 12, although other mechanically moving memory configurations may be used. Unit 12 is illustrated in simplified form sufficient for an understanding of the present invention because the utility of the present invention is not limited to the details of a particular drive unit construction.

Referring now to FIGS. 1 and 2 of the drawings, disk drive unit 12 includes a stack 16 of disks 18 having at least one magnetic surface 20. The disks 18 are mounted in parallel for simultaneous rotation on and by an integrated spindle and motor assembly 26. Data information on each

This Sheet Has Been Replaced

disk 18 are read and/or written to by a corresponding transducer head 28 movable across the disk surface 20.

Transducer heads 28 are mounted on flexure springs 30 carried by arms 32 ganged together for simultaneous pivotal movement about a support spindle 34. One of the arms 32 includes an extension 36 driven in a pivotal motion by a head drive motor 38. Although several drive arrangements are commonly used, the motor 38 can include a voice coil motor 40 cooperating with a magnet and core assembly (not seen) operatively controlled for moving the transducer heads 28 in synchronism in a radial direction in order to position the heads in registration with data information tracks or data cylinders 42 to be followed and access particular data sectors 44. Data storage disk file 10 is a modular unit including a housing 46. The various components of the disk file 10 are controlled in operation by signals generated by control unit 14 such as motor control signals on line 26A and position control signals on line 38A.

Numerous data information tracks 42 each at a specific radial location are arrayed in a concentric pattern in the magnetic medium of each disk surface 20 of data disks 18. A data cylinder includes a set of corresponding data information tracks 42 for the data surfaces 20 in the data storage disk file 10. Data information tracks 42 include a plurality of segments or data sectors 44, each containing a predefined size of individual groups of data records which are saved for later retrieval and updates. The data information tracks 42 are disposed at predetermined positions relative to a servo reference index. In FIG. 2 one sector 44 is illustrated as SECTOR 0 with a fixed index or mark INDEX for properly locating the first data sector. The location of each next sector 44 is identified by a sector identification (SID) pulse read by transducer heads 28 from surfaces 20.

Referring to FIG. 3, there is shown a circuit diagram illustrating phase modulated servo apparatus for carrying out the phase modulated servo method of the invention generally designated by the reference numeral 50. Apparatus 50 includes a servo channel including a dedicated servo surface 20' shown together with a dedicated servo transducer head 28' coupled to a servo preamplifier (SPA) 52, an automatic gain control (AGC) 54 and a servo identification (SID) filter 56. A data channel includes a data transducer head 28 disposed adjacent a data surface 20,

arm electronics (AE) 58, an automatic gain control (AGC) 60 and a servo filter 62.

While FIG. 3 shows circuitry 50 with a dedicated servo architecture with reference tracks, it should be understood that the invention advantageously applies to sector servo architectures. The phase information stored in the servo patterns is derived by extracting a fundamental harmonic, such as 2.5 Mhz, from the readback signal by the high-pass SID filter 56 and servo filter 62. Signals from either the dedicated servo head 28' or servo patterns read by data transducer head 28, are multiplexed at an analog multiplexer block 64. A zero-crossing comparator detector 66 coupled to the multiplexer 64 detects the zero crossing in the readback signal. The output of the comparator 66 is supplied to a servo phase demodulator 68.

Comparator 66 applies a square wave signal to the servo phase demodulator 68 with precise phase transitions based on the zero crossings of the first harmonic signal. This square wave is then exclusive ORed or XORed with a 2.5 Mhz crystal oscillator and the transition differences between these two signals are integrated over a certain period by servo phase demodulator 68. The integrator value at the end of this period is proportional to the head offset relative to the track centre line. This value is referred to as the position error signal (PES).

In the traditional phase pattern, although each burst changes phase 22.5 degrees between servo tracks, the difference between burst 1 and burst 2 is always 45 degrees. So for a given track, the servowriter only needs a resolution of 45 degrees or 1/8 of a period instead of 22.5 degrees or 1/16 of a period. The required 16 servo track types are generated by changing the phase of each burst in turn. That is, advancing the phase of burst 1 by 45 degrees while holding burst two the same as the previous track. Then retarding the phase of burst 2 while holding burst 1 the same as the previous track. This technique for the traditional phase pattern track types and burst phase is set forth in the following Table 1.

This Sheet Has Been Replaced



This Sheet Has Been Replaced

TABLE 1

SERVO TRACK TYPE	BURST 1,3 PHASE	BURST 2 PHASE
0	0	0
1	45	0
2	45	-45
3	90	-45
4	90	-90
5	135	-90
6	135	-135
7	180	-135
8	180	180
9	-135	180
10	-135	135
11	-90	135
12	-90	90
13	-45	90
14	-45	45
15	0	45

Using this technique, a 5 Mhz servo pattern can be written with a 40 Mhz clock instead of an 80 Mhz clock. Additionally, the original 22.5 degree steps can be duplicated by switching in a 22.5 degrees (25 nsec) delay during even tracks.

Referring to FIG. 4, a servo pattern written on 1/3 track pitch is shown with radius changes relative the vertical axis and circumferential changes relative the horizontal axis. In accordance with a feature of the embodiment, the track pitch of the written servo pattern is less than the conventional 1/2 track pitch to provide acceptable position linearity

This Sheet Has Been Replaced



with disk file including a MR transducer head and the servo pattern repeats in a selected number of cylinders or data tracks. The selected number of data cylinders is a binary number of cylinder, such as, 2, 4 or 8. A servo pattern repeating in 3 cylinders would not be selected.

In order to have a pattern that repeats in four tracks, the phase difference between burst 1 and burst 2 must go through 360 degrees in four tracks. When written on a 1/2 track pitch, the burst period is split into eight phases and is written with a clock eight times the burst frequency. When the servo tracks are written on a 1/3 track pitch, 12 servo tracks are written for four data cylinders. In this case the phase burst must be split into 12 phases and is written with a clock 12 times the burst frequency. For example, if a 5 Mhz pattern is required and 1/3 tracks are needed for acceptable linearity, then the pattern can be written with a 60 Mhz clock. In this case the 5 Mhz period consists of 12, 60 Mhz clocks and the phase of each burst is changed by one bit for each servo track written. The latch servo track writer (STW) presently used in manufacturing can easily be programmed to write using either 12 or 16 bit words so a 1/3 track pitch pattern is easy to implement.

Other implementations of the invention are also possible. For example, writing on a 1/3 (33%) track pitch with the STW clock corresponding to 4/3 of the demodulator clock and with 12 bits to each servo pattern period. Alternatively, writing on a 40% track pitch with the STW clock corresponding to 8/5 of the demodulator clock and with 10 bits to each servo pattern period. Another alternative is writing on a 1/3 track pitch and having two track types instead of four track types and the STW clock must be 2/3 of the demodulator clock.

Advantages of the 1/3 track pitch pattern as illustrated in FIG. 4 are that the MR read element width can be optimized based on SER and not on servo linearity; allowing MR read elements to be less than 50% of the track pitch; and with three servo tracks per data cylinder, the cylinder boundary is coincident with the edge of the servo tracks. This makes the placement of a Gray code track id pattern easy to implement. Servo writing time for the 1/3 track pitch is significantly reduced as compared to a 1/4 track pitch.

While the invention has been described with reference to details of the illustrated embodiments, these details are not intended to limit the scope of the invention as defined in the appended claims.

RO9-93-035

This Sheet Has Been Replaced

CLAIMS

1. Apparatus for servo positioning in a disk file comprising:

at least one disk mounted for rotation about an axis and having at least one disk surface for storing data;

transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; and

means for writing a servo pattern on said data disk surface having a track pitch of less than 1/2 of a data cylinder and said servo pattern repeating in a selected binary number of data cylinders.

2. Apparatus as claimed in claim 1 or claim 2 wherein said transducer means include a read element and a write element, said read element having a width less than said write element and said read element being greater than 1/3 of a data cylinder and less than 1 data cylinder.

3. Apparatus as claimed in claim 1 or claim 2 wherein said servo pattern writing means include means for writing a phase modulated servo pattern.

4. Apparatus as claimed in any preceding claim wherein said servo pattern writing means include means for writing a servo pattern having a 1/3 track pitch and said servo pattern repeating in 4 data cylinders.

5. Apparatus as claimed in claim 4 wherein said servo pattern writing means include a clock having a frequency of 12 times a burst frequency of said servo pattern.

6. Apparatus as claimed in claim 4 wherein said servo pattern is a 5 MHz pattern of 12-bit words and said writing clock is a 60 MHz clock.

7. Apparatus as claimed in any of claims 1 to 3 wherein said servo pattern has a 40% track pitch and said servo pattern repeating in 4 data cylinders, wherein said servo pattern writing means include a clock having a frequency of 8/5 times a burst frequency of said servo pattern and said servo pattern of 10-bit words.

* C L M S *

This Sheet Has Been Replaced

8. Apparatus as claimed in any of claims 1 to 3 wherein said servo pattern has a 1/3 track pitch and said servo pattern repeating in 2 data cylinders, wherein said servo pattern is a 5 MHz pattern of 6-bit words and said writing clock is a 30 MHz clock.

9. A method for servo positioning for use in a disk file including at least one disk mounted for rotation about an axis and having at least one disk surface for storing data and transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface, said transducer means having a read element and a write element; said read element having a width less than said write element and said read element width being greater than 1/3 of a data cylinder; said method comprising the steps of:

writing a servo pattern on said data disk surface having a track pitch of less than 1/2 of a data cylinder and said servo pattern repeating in a selected binary number of data cylinders.

10. A method for servo positioning as claimed in claim 9 wherein said servo pattern writing step includes the steps of writing said servo pattern with a 1/3 track pitch and including 12 bit words for repeating said servo pattern in four data cylinders.

11. A direct access storage device comprising:

a housing;

at least one disk mounted in said housing for rotation about an axis and having at least one disk surface for storing data;

magneto-resistive (MR) transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; said MR transducer means including a write element and a read element, said read element having a width less than said write element and said read element width being greater than 1/3 of a data cylinder; and

means for writing on said disk surface a servo pattern at a predetermined track pitch of less than 1/2 of a data cylinder and said servo pattern including a 360° phase burst difference between adjacent bursts within a predetermined binary number of data cylinders.

* C L M S *

12. A direct access storage device as claimed in claim 11 wherein said predetermined track pitch equals 1/3 and said predetermined binary number of data cylinders equals 4.

13. A direct access storage device as claimed in claim 11 or claim 12 wherein said servo pattern writing means includes a clock having a frequency of 12 times a burst frequency of said servo pattern.

14. Apparatus subetantially as hereinbefore described with reference to Figures 1 to 4.

This Sheet Has Been Replaced





This Sheet Has Been Replaced

FIG. 1


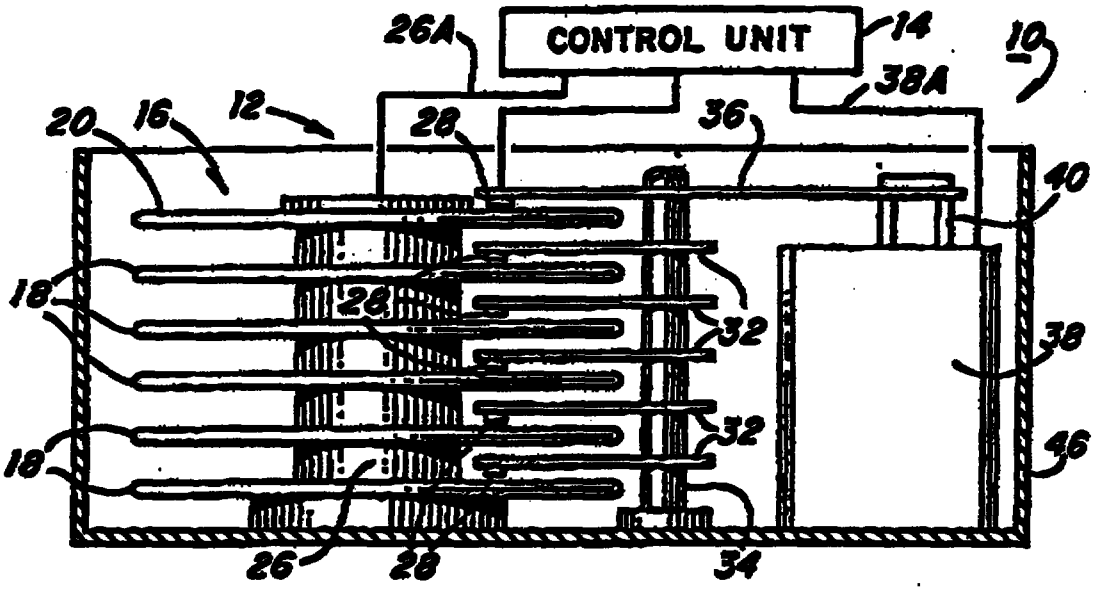


FIG. 2

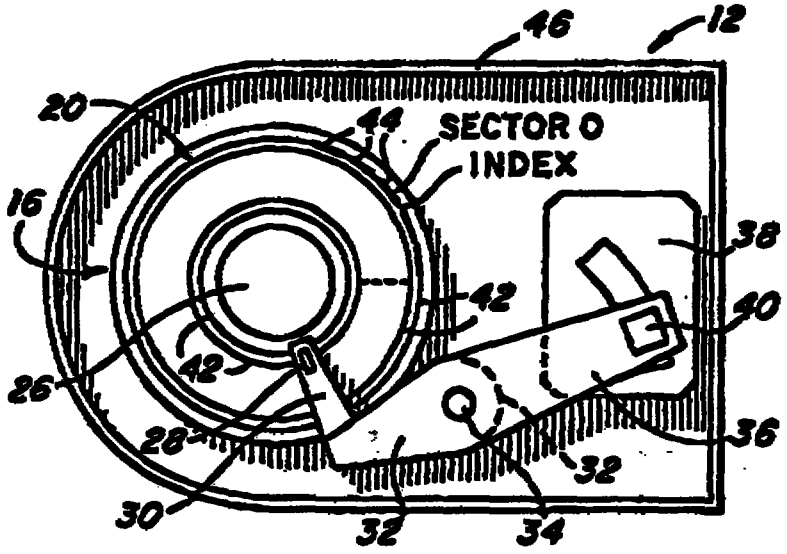

This Sheet Has Been Replaced

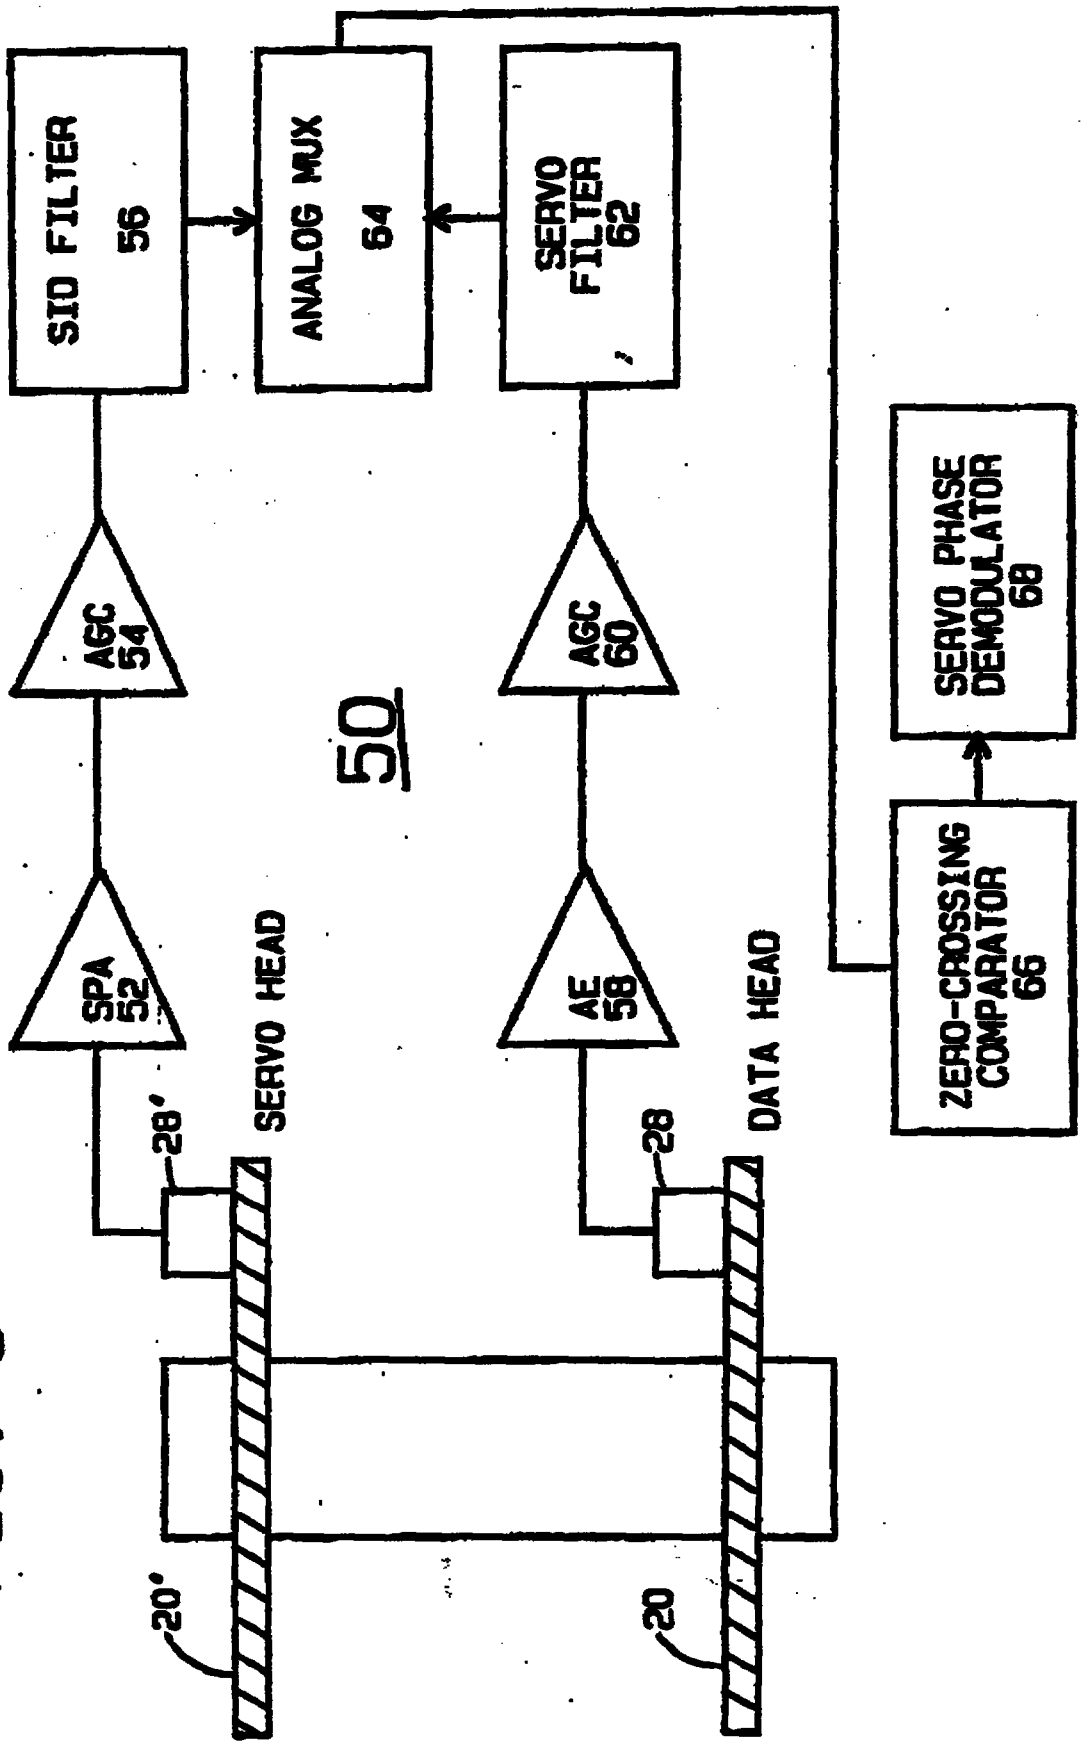


FIG. 3

This Sheet Has Been Replaced

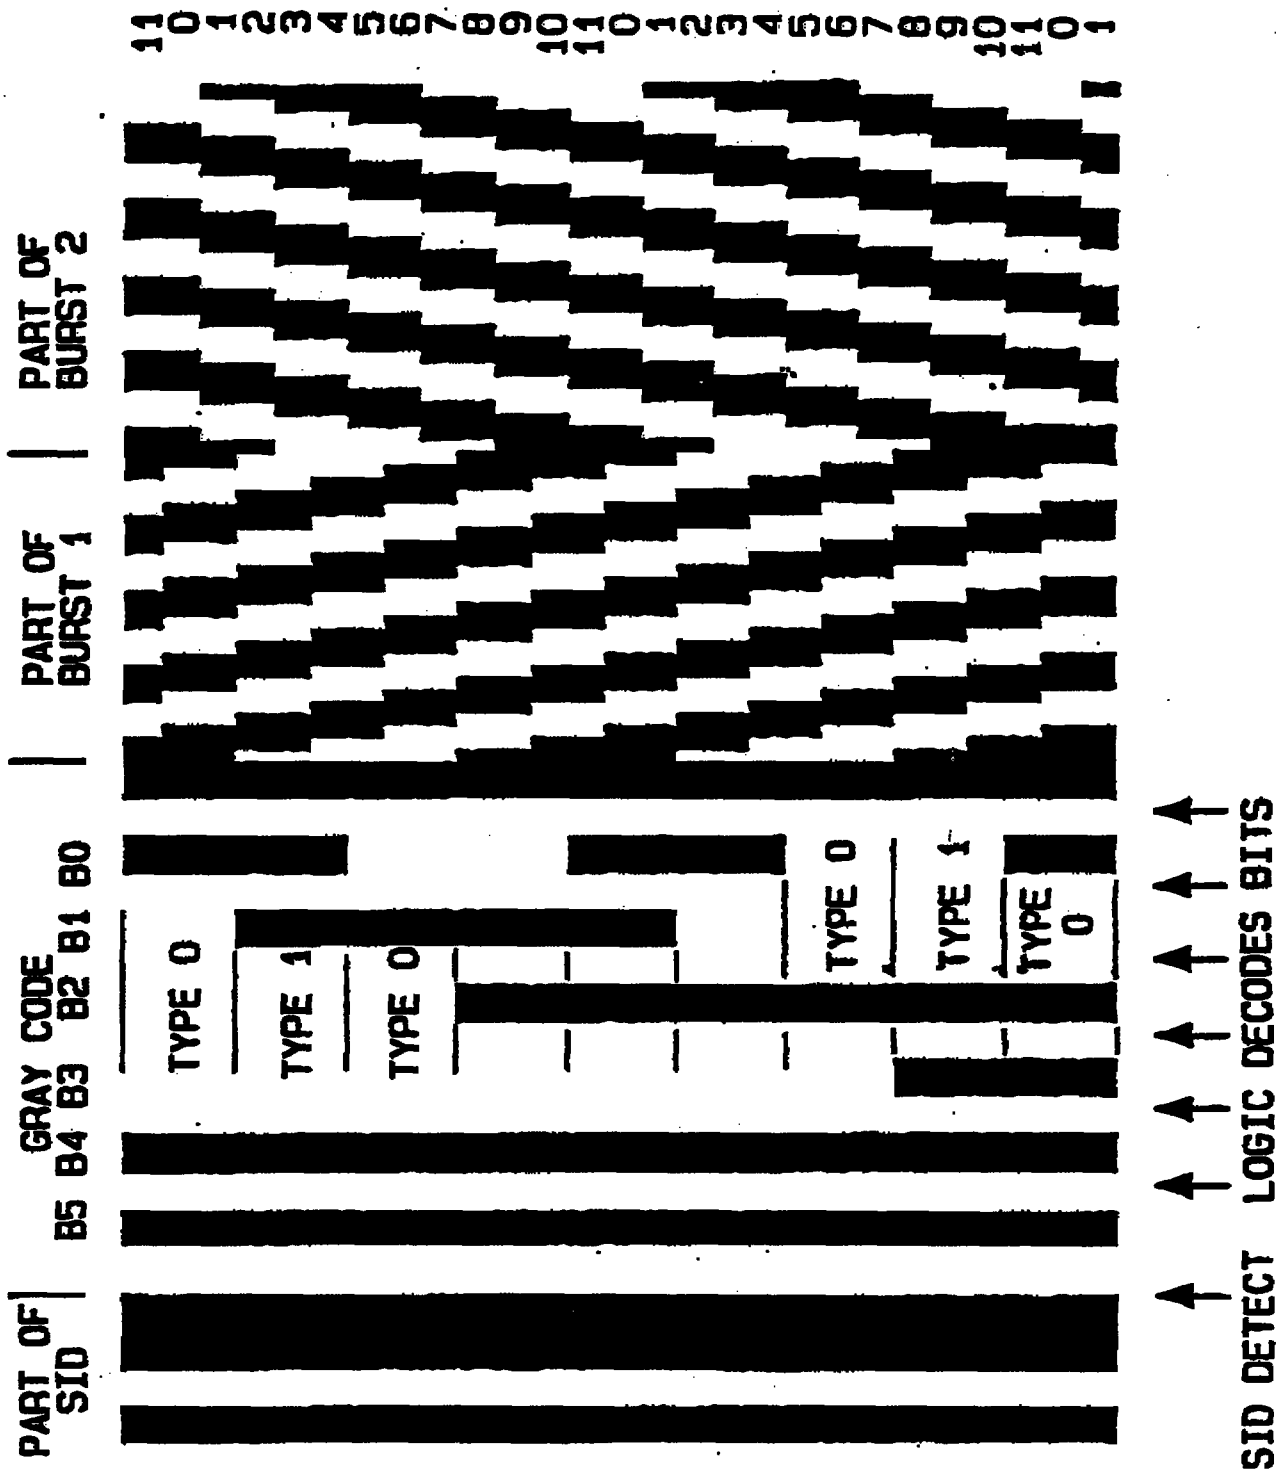


FIG. 4

— RTNP copy -

REPLACED SHEETS SG

☑ Description : paged 2 to paged 3
☑ Claim(s) : paged 8 to paged 10
☐ Drawing(s) : paged — to paged —
☐ Abstract : paged — to paged —

METHOD AND APPARATUS FOR SERVO POSITIONING IN A DIRECT ACCESS STORAGE DEVICE

The present invention relates generally to an actuator positioning system in a direct access storage device (DASD) and more particularly to a phase modulated servo positioning method and apparatus for use with narrow transducer heads in a disk file.

Computers often include auxiliary memory storage units having media on which data can be written and from which data can be read for later use. Disk drive units incorporating stacked, commonly rotated rigid magnetic disks are used for storage of data in magnetic form on the disk surfaces. Data is recorded in concentric, radially spaced data information tracks arrayed on the surfaces of the disks. Transducer heads driven in a path toward and away from the drive axis write data to the disks and read data from the disks.

All DASD units must have a method to position each data head over the proper radial location to write a track and again, to position it very close to the same location to read the track. With the higher level files using a voice coil type of actuator, a feedback mechanism must be provided to locate and stably hold the heads on a given track. Typically, track accessing and track following are provided utilizing a magnetically written pattern in the DASD unit. A dedicated servo system employs one surface of one of the disks in the DASD on which to have all the tracking and access information. A sector servo system uses small portions of tracks between each or between several sectors on each track of each data surface to provide the tracking and access information. A hybrid servo system uses both to obtain advantages of each type of servo.

Magneto-resistive (MR) heads are a great advancement in read/write technology for DASD. One of the key advantages of MR heads is the use of separate elements for reading and writing. This allows the writing element to be wide, almost a full track pitch in width, and the reading element to be narrow. This write wide, read narrow capability eases the track misregistration (TMR) requirements on the servo system by effectively increasing the width of the soft-error rate (SER) pathtubs by the difference in widths between the read and write elements.

Servo tracks are typically written on a 1/2 track pitch. A traditional phase pattern is written so that the phase of each burst

This is the replacement sheet
Date: 30 NOV 1998

This Sheet Has Been Replaced

changes 22.5 degrees for each written servo track. For increasing track types, the phase is advanced in bursts 1 and 3 and retarded in burst 2. In this fashion, the phase between burst 1 and burst 2 changes 45 degrees for each servo track written. This means that a 5 Mhz pattern can be written with a 80 Mhz clock. In this case the 5 Mhz period consists of 16, 80 Mhz clocks and the phase of each burst is changed by one bit for each servo track written. Then the difference in phase between the bursts repeats in eight servo tracks. The eight servo tracks written on a 1/2 track pitch correspond to four data tracks or cylinders.

To optimize the SER, a reading transducer width that is less than 50% of the track pitch is required. With reading elements less than the width of a single servo track, position linearity becomes unacceptably poor with the conventional 1/2 track pitch servo tracks. Linearity error can be improved by writing narrower tracks. For example, the phase pattern written on a 1/4 track pitch would provide acceptable position linearity; however, this would double the time required for servo writing and would be prohibitively expensive for a sector servo file.

If a conventional servo pattern is written on a narrow track pitch, for example, 3/8 track pitch, the position linearity requirements will be satisfied, but the pattern will repeat in three data cylinders instead of four. This means that the position error signal (PES) extends +/-1.5 tracks instead of +/-2 tracks before the PES repeats. When seeking, this 50% loss in range is significant. Seek velocities can be as high as 40 or 50 tracks/sample. This means that position must be estimated 50 tracks away; therefore, the PES error must never be greater than 1.5 tracks out of 50, or 3%. If the error is greater than this amount, the estimator algorithm may converge on the wrong position and velocity and be off by modulo three tracks. As a result a conventional servo pattern with a narrow track pitch pattern is unacceptable.

It is a principal object of the present invention to provide a phase modulated servo method and apparatus for use with narrow transducer heads.

In brief, the objects and advantages of the present invention are achieved by a phase modulated servo method and apparatus to provide acceptable position linearity for servo positioning with a narrow transducer head in a disk file. The disk file includes at least one disk mounted for rotation about an axis and the disk has at least one disk

This is the replacement sheet

Date: 30 NOV 1996

This Sheet Has Been Replaced

surface for storing data and has a transducer mounted for movement across the disk surface for writing to and for reading data and servo patterns from the disk surface. The transducer includes a read element and a write element. The read element has a width less than the write element and the read element width is less than 1/2 of a data cylinder. A servo pattern is written on the data disk surface having a track pitch of less than 1/2 of a data cylinder and the servo pattern repeats in a selected binary number of data cylinders.

The present invention can best be understood from the following detailed description of embodiments of the invention illustrated in the drawing, wherein:

FIG. 1 is a schematic and block diagram of a data storage disk file;

FIG. 2 is a diagram showing the accessing mechanism for a single disk surface of the apparatus of FIG. 1;

FIG. 3 is a block diagram representation illustrating apparatus for carrying out a servo positioning method in the data storage disk file of FIG. 1; and

FIG. 4 is a chart illustrating a servo pattern written on 1/3 track pitch.

In FIG. 1 there is shown a partial schematic block diagram of parts of a data storage disk file 10 including a data storage medium generally designated as 12 and a control unit generally designated as 14. In the preferred embodiment of this invention, the data storage medium 12 is embodied in a rigid magnetic disk drive unit 12, although other mechanically moving memory configurations may be used. Unit 12 is illustrated in simplified form sufficient for an understanding of the present invention because the utility of the present invention is not limited to the details of a particular drive unit construction.

Referring now to FIGS. 1 and 2 of the drawings, disk drive unit 12 includes a stack 16 of disks 18 having at least one magnetic surface 20. The disks 18 are mounted in parallel for simultaneous rotation on and by an integrated spindle and motor assembly 26. Data information on each

This is the replacement sheet

Date: 30 NOV 1996

disk 18 are read and/or written to by a corresponding transducer head 28 movable across the disk surface 20.

Transducer heads 28 are mounted on flexure springs 30 carried by arms 32 ganged together for simultaneous pivotal movement about a support spindle 34. One of the arms 32 includes an extension 36 driven in a pivotal motion by a head drive motor 38. Although several drive arrangements are commonly used, the motor 38 can include a voice coil motor 40 cooperating with a magnet and core assembly (not seen) operatively controlled for moving the transducer heads 28 in synchronism in a radial direction in order to position the heads in registration with data information tracks or data cylinders 42 to be followed and access particular data sectors 44. Data storage disk file 10 is a modular unit including a housing 46. The various components of the disk file 10 are controlled in operation by signals generated by control unit 14 such as motor control signals on line 26A and position control signals on line 38A.

Numerous data information tracks 42 each at a specific radial location are arrayed in a concentric pattern in the magnetic medium of each disk surface 20 of data disks 18. A data cylinder includes a set of corresponding data information tracks 42 for the data surfaces 20 in the data storage disk file 10. Data information tracks 42 include a plurality of segments or data sectors 44, each containing a predefined size of individual groups of data records which are saved for later retrieval and updates. The data information tracks 42 are disposed at predetermined positions relative to a servo reference index. In FIG. 2 one sector 44 is illustrated as SECTOR 0 with a fixed index or mark INDEX for properly locating the first data sector. The location of each next sector 44 is identified by a sector identification (SID) pulse read by transducer heads 28 from surfaces 20.

Referring to FIG. 3, there is shown a circuit diagram illustrating phase modulated servo apparatus for carrying out the phase modulated servo method of the invention generally designated by the reference numeral 50. Apparatus 50 includes a servo channel including a dedicated servo surface 20' shown together with a dedicated servo transducer head 28' coupled to a servo preamplifier (SPA) 52, an automatic gain control (AGC) 54 and a servo identification (SID) filter 56. A data channel includes a data transducer head 28 disposed adjacent a data surface 20,

This is the replacement sheet

Date: 30 NOV 1988

arm electronics (AE) 58, an automatic gain control (AGC) 60 and a servo filter 62.

While FIG. 3 shows circuitry 50 with a dedicated servo architecture with reference tracks, it should be understood that the invention advantageously applies to sector servo architectures. The phase information stored in the servo patterns is derived by extracting a fundamental harmonic, such as 2.5 Mhz, from the readback signal by the high-pass SID filter 56 and servo filter 62. Signals from either the dedicated servo head 28' or servo patterns read by data transducer head 28, are multiplexed at an analog multiplexer block 64. A zero-crossing comparator detector 66 coupled to the multiplexer 64 detects the zero crossing in the readback signal. The output of the comparator 66 is supplied to a servo phase demodulator 68.

Comparator 66 applies a square wave signal to the servo phase demodulator 68 with precise phase transitions based on the zero crossings of the first harmonic signal. This square wave is then exclusive ORed or XORed with a 2.5 Mhz crystal oscillator and the transition differences between these two signals are integrated over a certain period by servo phase demodulator 68. The integrator value at the end of this period is proportional to the head offset relative to the track centre line. This value is referred to as the position error signal (PES).

In the traditional phase pattern, although each burst changes phase 22.5 degrees between servo tracks, the difference between burst 1 and burst 2 is always 45 degrees. So for a given track, the servowriter only needs a resolution of 45 degrees or 1/8 of a period instead of 22.5 degrees or 1/16 of a period. The required 16 servo track types are generated by changing the phase of each burst in turn. That is, advancing the phase of burst 1 by 45 degrees while holding burst two the same as the previous track. Then retarding the phase of burst 2 while holding burst 1 the same as the previous track. This technique for the traditional phase pattern track types and burst phase is set forth in the following Table 1.

This is the replacement sheet

Date: 30 NOV 1995

TABLE 1

SERVO TRACK TYPE	BURST 1,3 PHASE	BURST 2 PHASE
0	0	0
1	45	0
2	45	-45
3	90	-45
4	90	-90
5	135	-90
6	135	-135
7	180	-135
8	180	180
9	-135	180
10	-135	135
11	-90	135
12	-90	90
13	-45	90
14	-45	45
15	0	45

Using this technique, a 5 Mhz servo pattern can be written with a 40 Mhz clock instead of an 80 Mhz clock. Additionally, the original 22.5 degree steps can be duplicated by switching in a 22.5 degrees (25 nsec) delay during even tracks.

Referring to FIG. 4, a servo pattern written on 1/3 track pitch is shown with radius changes relative the vertical axis and circumferential changes relative the horizontal axis. In accordance with a feature of the embodiment, the track pitch of the written servo pattern is less than the conventional 1/2 track pitch to provide acceptable position linearity

This is the replacement sheet

Date: 30 NOV 1996

with disk file including a MR transducer head and the servo pattern repeats in a selected number of cylinders or data tracks. The selected number of data cylinders is a binary number of cylinder, such as, 2, 4 or 8. A servo pattern repeating in 3 cylinders would not be selected.

In order to have a pattern that repeats in four tracks, the phase difference between burst 1 and burst 2 must go through 360 degrees in four tracks. When written on a 1/2 track pitch, the burst period is split into eight phases and is written with a clock eight times the burst frequency. When the servo tracks are written on a 1/3 track pitch, 12 servo tracks are written for four data cylinders. In this case the phase burst must be split into 12 phases and is written with a clock 12 times the burst frequency. For example, if a 5 Mhz pattern is required and 1/3 tracks are needed for acceptable linearity, then the pattern can be written with a 60 Mhz clock. In this case the 5 Mhz period consists of 12, 60 Mhz clocks and the phase of each burst is changed by one bit for each servo track written. The latch servo track writer (STW) presently used in manufacturing can easily be programmed to write using either 12 or 16 bit words so a 1/3 track pitch pattern is easy to implement.

Other implementations of the invention are also possible. For example, writing on a 1/3 (33%) track pitch with the STW clock corresponding to 4/3 of the demodulator clock and with 12 bits to each servo pattern period. Alternatively, writing on a 40% track pitch with the STW clock corresponding to 8/5 of the demodulator clock and with 10 bits to each servo pattern period. Another alternative is writing on a 1/3 track pitch and having two track types instead of four track types and the STW clock must be 2/3 of the demodulator clock.

Advantages of the 1/3 track pitch pattern as illustrated in FIG. 4 are that the MR read element width can be optimized based on SER and not on servo linearity; allowing MR read elements to be less than 50% of the track pitch; and with three servo tracks per data cylinder, the cylinder boundary is coincident with the edge of the servo tracks. This makes the placement of a Gray code track id pattern easy to implement. Servo writing time for the 1/3 track pitch is significantly reduced as compared to a 1/4 track pitch.

While the invention has been described with reference to details of the illustrated embodiments, these details are not intended to limit the scope of the invention as defined in the appended claims.

This is the replacement sheet

Date: 30 NOV 1995

This Sheet Has Been Replaced

CLAIMS

1. Apparatus for servo positioning in a disk file comprising:

at least one disk mounted for rotation about an axis and having at least one disk surface for storing data;

transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; and

means for writing a servo pattern on said data disk surface having a track pitch of less than 1/2 of a data cylinder and said servo pattern repeating in a selected binary number of data cylinders.

2. Apparatus as claimed in claim 1 or claim 2 wherein said transducer means include a read element and a write element, said read element having a width less than said write element and said read element being greater than 1/3 of a data cylinder and less than 1 data cylinder.

3. Apparatus as claimed in claim 1 or claim 2 wherein said servo pattern writing means include means for writing a phase modulated servo pattern.

4. Apparatus as claimed in any preceding claim wherein said servo pattern writing means include means for writing a servo pattern having a 1/3 track pitch and said servo pattern repeating in 4 data cylinders.

5. Apparatus as claimed in claim 4 wherein said servo pattern writing means include a clock having a frequency of 12 times a burst frequency of said servo pattern.

6. Apparatus as claimed in claim 4 wherein said servo pattern is a 5 MHz pattern of 12-bit words and said writing clock is a 60 MHz clock.

7. Apparatus as claimed in any of claims 1 to 3 wherein said servo pattern has a 40% track pitch and said servo pattern repeating in 4 data cylinders, wherein said servo pattern writing means include a clock having a frequency of 8/5 times a burst frequency of said servo pattern and said servo pattern of 10-bit words.

* C L M S *

This is the replacement sheet

Date: 30 NOV 1996

This Sheet Has Been Replaced

8. Apparatus as claimed in any of claims 1 to 3 wherein said servo pattern has a 1/3 track pitch and said servo pattern repeating in 2 data cylinders, wherein said servo pattern is a 5 MHz pattern of 6-bit words and said writing clock is a 30 MHz clock.

9. A method for servo positioning for use in a disk file including at least one disk mounted for rotation about an axis and having at least one disk surface for storing data and transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface, said transducer means having a read element and a write element; said read element having a width less than said write element and said read element width being greater than 1/3 of a data cylinder; said method comprising the steps of:

writing a servo pattern on said data disk surface having a track pitch of less than 1/2 of a data cylinder and said servo pattern repeating in a selected binary number of data cylinders.

10. A method for servo positioning as claimed in claim 9 wherein said servo pattern writing step includes the steps of writing said servo pattern with a 1/3 track pitch and including 12 bit words for repeating said servo pattern in four data cylinders.

11. A direct access storage device comprising:

a housing;

at least one disk mounted in said housing for rotation about an axis and having at least one disk surface for storing data;

magneto-resistive (MR) transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; said MR transducer means including a write element and a read element, said read element having a width less than said write element and said read element width being greater than 1/3 of a data cylinder; and

means for writing on said disk surface a servo pattern at a predetermined track pitch of less than 1/2 of a data cylinder and said servo pattern including a 180° phase burst difference between adjacent bursts within a predetermined binary number of data cylinders.

* C L M S *

This is the replacement sheet

Date: 30 NOV 1995

This Sheet Has Been Replaced

12. A direct access storage device as claimed in claim 11 wherein said predetermined track pitch equals 1/3 and said predetermined binary number of data cylinders equals 4.

13. A direct access storage device as claimed in claim 11 or claim 12 wherein said servo pattern writing means includes a clock having a frequency of 12 times a burst frequency of said servo pattern.

14. Apparatus substantially as hereinbefore described with reference to Figures 1 to 4.

CLMS

This is the replacement sheet

Date: 30 NOV 1995

METHOD AND APPARATUS FOR SERVO POSITIONING IN A DIRECT ACCESS STORAGE DEVICE

ABSTRACT

A phase modulated servo method and apparatus provides acceptable position linearity for servo positioning with a narrow transducer head in a disk file. The disk file includes at least one disk mounted for rotation about an axis and the disk has at least one disk surface for storing data and has a transducer mounted for movement across the disk surface for writing to and for reading data and servo patterns for the disk surface. The transducer includes a read element and a write element. The read element has a width less than the write element and the read element width is greater than 1/3 of a data cylinder and less than 1/2 of a data cylinder. A servo pattern is written on the data disk surface having a track pitch of less than 1/2 of a data cylinder and the servo pattern repeats in a selected binary number of data cylinders.

Fig. 4

This is the replacement sheet

Date: 30 NOV 1995

FIG. 1


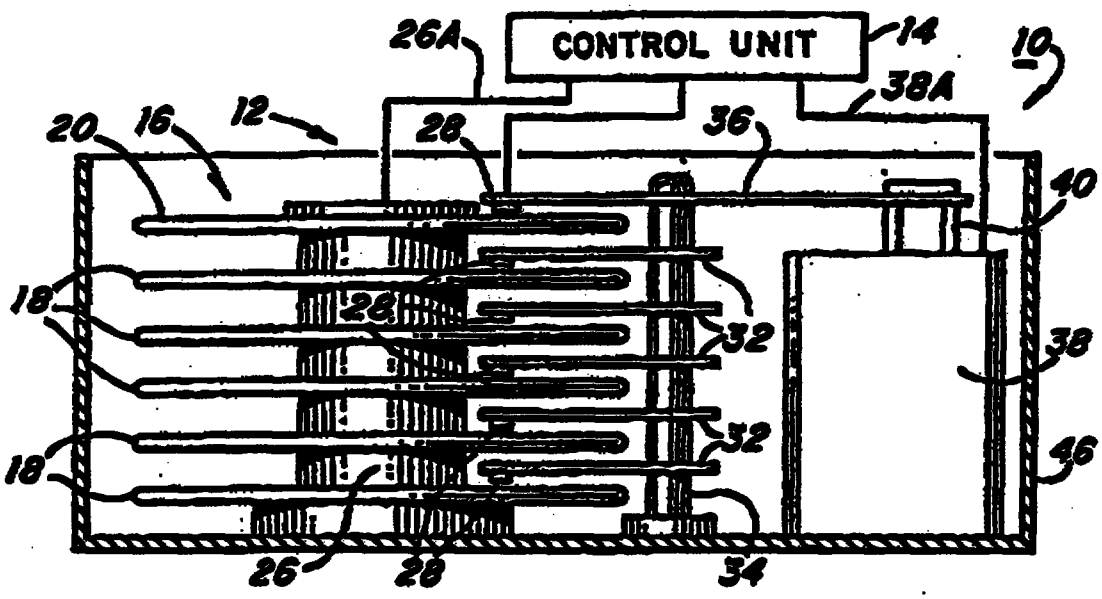


FIG. 2

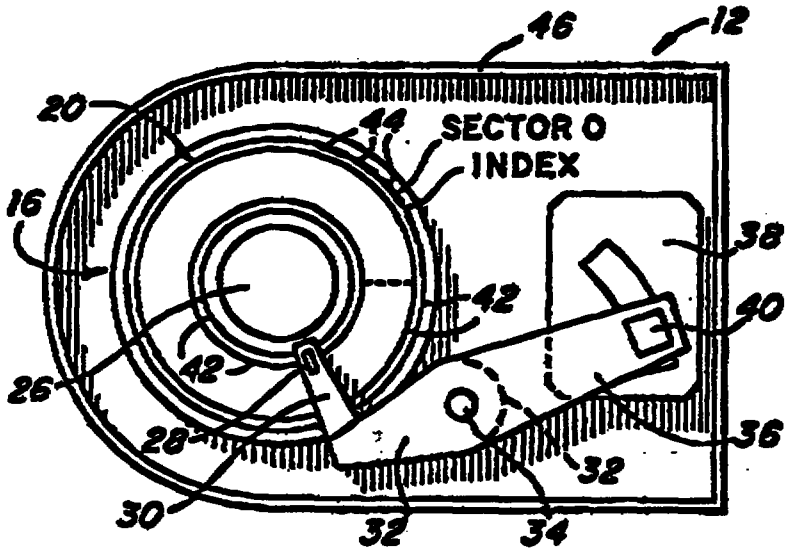

This is the replacement sheet

Date: 30 NOV 1986

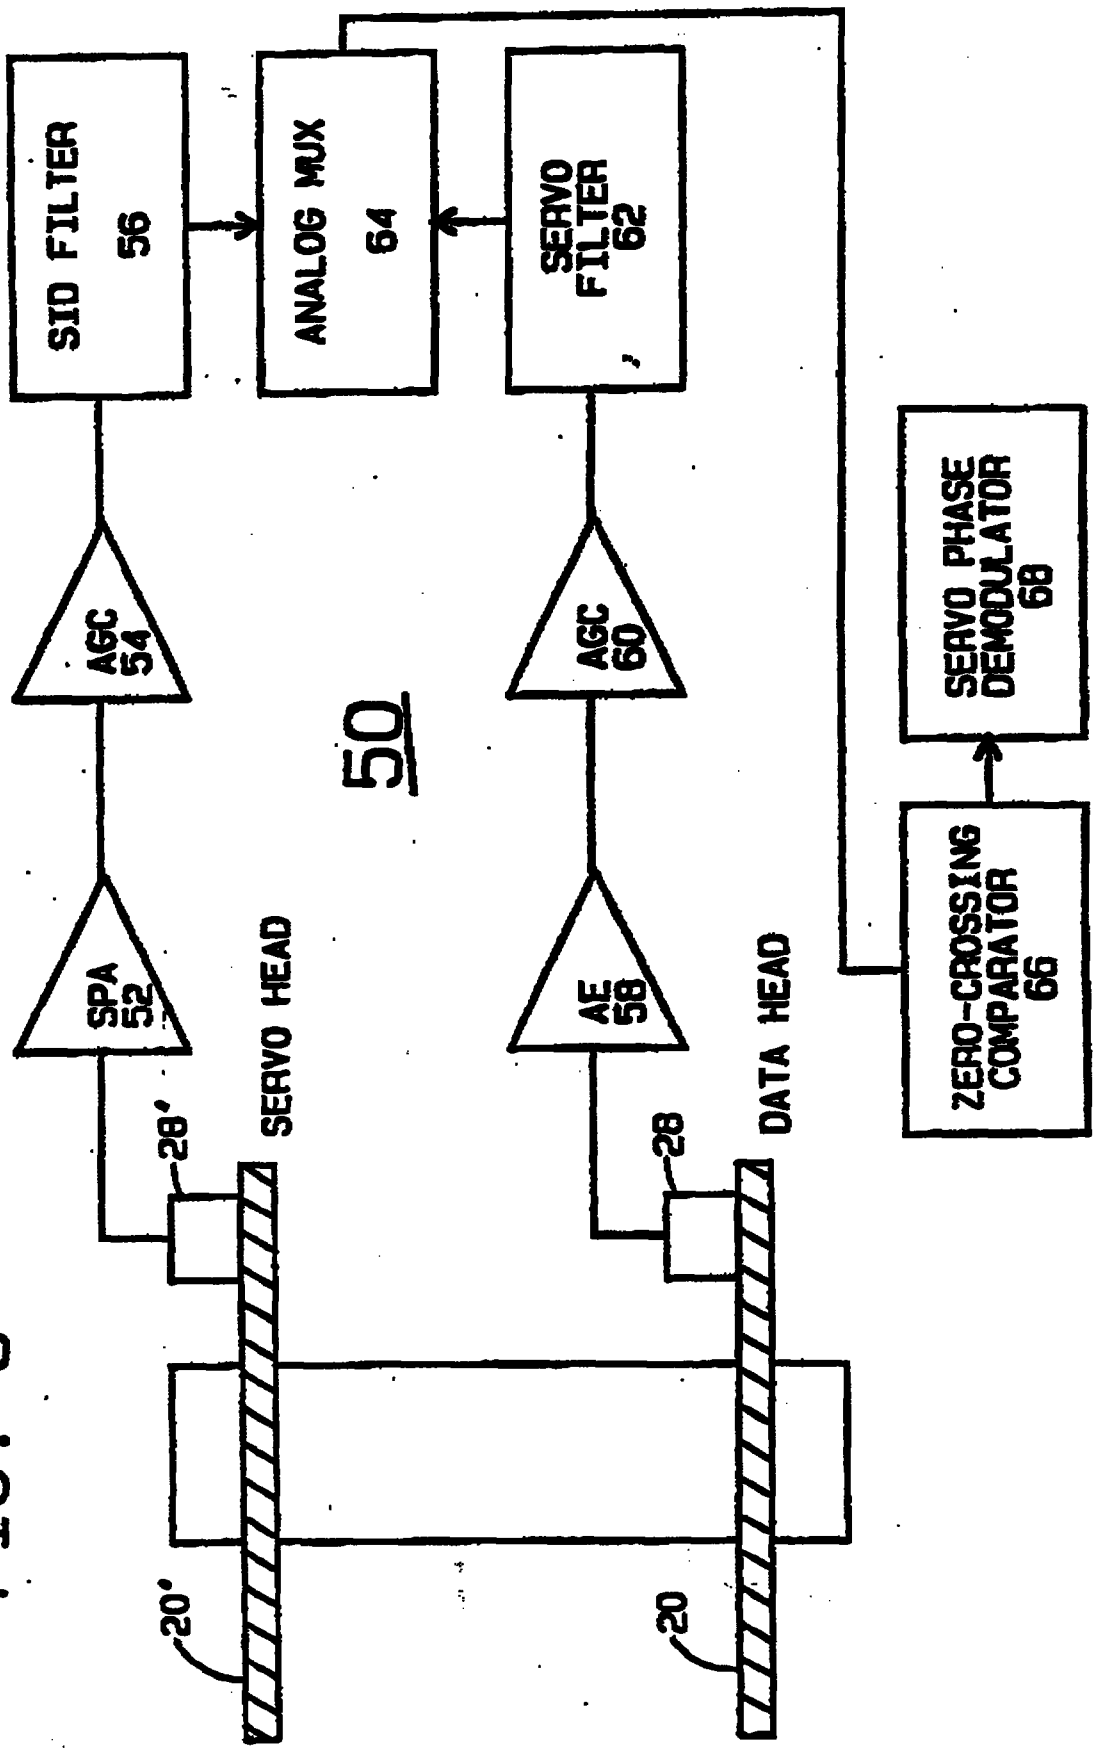


FIG. 3

This is the replacement sheet

Date: 30 NOV 1996

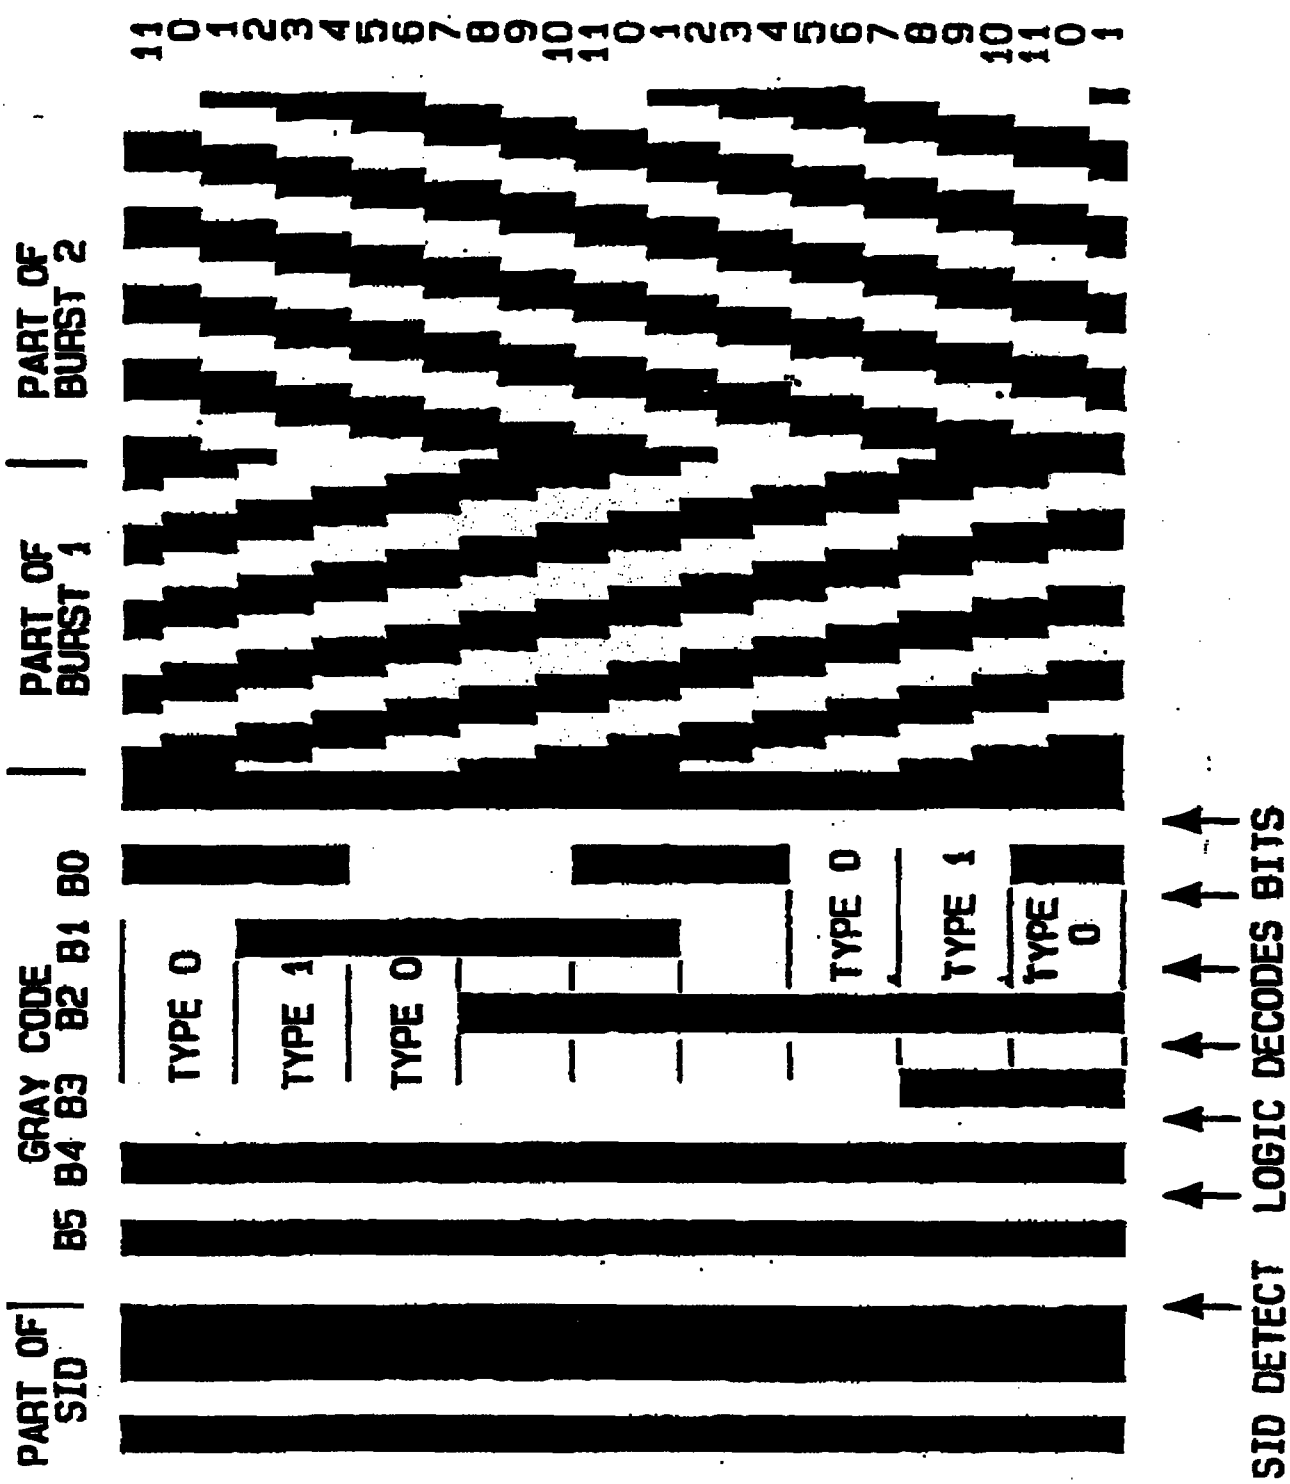


FIG. 4

This is the replacement sheet

Date: 30 NOV 1986

RD9-93-035

(12) UK Patent Application (19) GB (11) 2 286 481 (13) A

(43) Date of A Publication 16.08.1995

(21) Application No 9501719.0

(22) Date of Filing 24.01.1995

(30) Priority Data
(31) 08194235 (32) 10.02.1994 (33) US

(71) Applicant(s)
International Business Machines Corporation
(Incorporated in USA - New York)
Armonk, New York 10504, United States of America

(72) Inventor(s)
Dana Henry Brown
Mark David Hagen
John Charles Purkett

(74) Agent and/or Address for Service
R G Lloyd
IBM United Kingdom Limited, Intellectual Property Department, Mail Point 110, Hursley Park, WINCHESTER, Hampshire, SO21 2JN, United Kingdom

(51) INT CL[6]
G11B 5/55 5/596

(52) UK CL (Edition N)
G5R RB26 RB347 RB66X RB784 RKF

(56) Documents Cited
EP 0129708 A1


(58) Field of Search
UK CL (Edition N) G3N NGE3AC NGE3BA, G5R RBC28, G5R RB26 RKF
INT CL[6] G11B 5/55 5/596
Online: WPI, INSPEC

(54) Method and apparatus for servo positioning in a direct access storage device

ABSTRACT

(57) A phase modulated servo method and apparatus provides acceptable position linearity for servo positioning with a narrow transducer head in a disk file. The disk file includes at least one disk mounted for rotation about an axis and the disk has at least one disk surface for storing data and has a transducer mounted for movement across the disk surface for writing to and for reading data and servo patterns from the disk surface. The transducer includes a read element and a write element. The read element has a width less than the write element and the read element width is greater than 1/3 of a data cylinder and less than 1/2 of a data cylinder. A servo pattern is written on the data disk surface having a track pitch of less than 1/2 of a data cylinder and the servo pattern repeats in a selected binary number of data cylinders.

FIG. 4

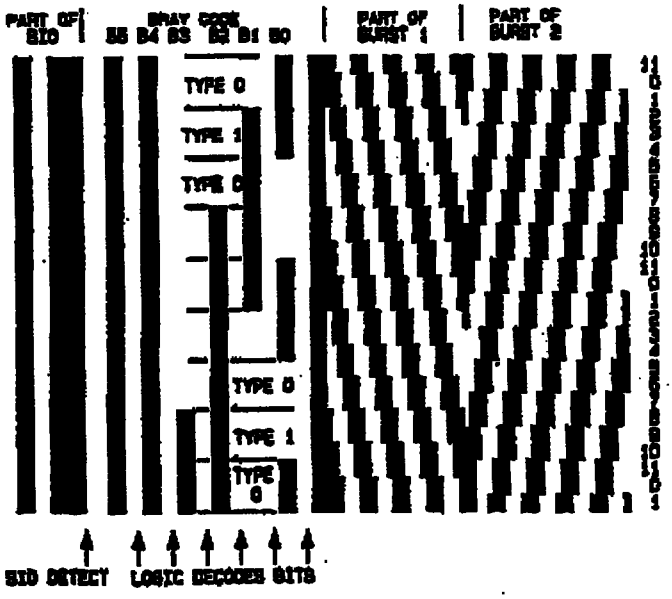

This Sheet Has Been Replaced

GB 2 286 481 A

CLAIMS

1. Apparatus for servo positioning in a disk file comprising:

at least one disk mounted for rotation about an axis and having at least one disk surface for storing data;

transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; said transducer means include a read element and a write element, said read element having a width less than said write element and said read element having a width greater than 1/3 the width of a data cylinder and less than 1/2 the width of the data cylinder; and

means for writing a servo pattern on said data disk surface having a track pitch of less than 1/2 the width of a data cylinder and said servo pattern repeating in predetermined number of data cylinders, said predetermined number being a value equal to a positive power of two.

2. Apparatus as claimed in claim 1 wherein said servo pattern writing means include means for writing a phase modulated servo pattern.

3. Apparatus as claimed in any preceding claim wherein said servo pattern writing means include means for writing a servo pattern having a 1/3 track pitch and said servo pattern repeating in 4 data cylinders.

4. Apparatus as claimed in claim 3 wherein said servo pattern writing means include a writing clock having a frequency of 12 times a burst frequency of said servo pattern.

5. Apparatus as claimed in claim 4 wherein said servo pattern is a 5 MHz pattern of 12-bit words and said writing clock is a 60 MHz clock.

6. Apparatus as claimed in any of claims 1 to 2 wherein said servo pattern has a 40% track pitch and said servo pattern repeating in a 4 data cylinders, wherein said servo pattern writing means include a clock having a frequency of 8/5 times a burst frequency of said servo pattern and said servo pattern of 10-bit words.

7. Apparatus as claimed in any of claims 1 to 2 wherein said servo pattern writing means includes a writing clock and means for writing a servo pattern having a 1/3 track

This is the replacement sheet

Date: 09 JAN 1998

pitch and said servo pattern repeating in 2 data cylinders, wherein said servo pattern is a 5 MHz pattern of 6-bit words and said writing clock is a 30 MHz clock.

8. A method for servo positioning for use in a disk file including at least one disk mounted for rotation about an axis and having at least one disk surface for storing data and transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface, said transducer means having a read element and a write element; said read element having a width less than said write element and said read element width being greater than 1/3 of the width of a data cylinder and less than 1/2 the width of the data cylinder; said method comprising the steps of:

writing a servo pattern on said data disk surface having a track pitch of less than 1/2 of the width of a data cylinder and said servo pattern repeating in a predetermined number of data cylinders, said predetermined number being a value equal to a positive power of two.

9. A method for servo positioning as claimed in claim 8 wherein said servo pattern writing step includes the steps of writing said servo pattern with a 1/3 track pitch and including 12 bit words for repeating said servo pattern in four data cylinders.

10. A direct access storage device comprising:

a housing;

at least one disk mounted in said housing for rotation about an axis and having at least one disk surface for storing data;

magneto-resistive (MR) transducer means mounted for movement across said disk surface for writing to and for reading data and servo patterns from said disk surface; said MR transducer means including a write element and a read element, said read element having a width less than said write element and said read element width being greater than 1/3 of the width of a data cylinder and less than 1/2 of the width of the data cylinder; and

This is the replacement sheet

Date: 09 JAN 1998

means for writing on said disk surface a servo pattern at a predetermined track pitch of less than 1/2 of the width of a data cylinder and said servo pattern including a 360° phase burst difference between adjacent bursts within a predetermined number of data cylinders, said predetermined number being a value equal to a positive power of two.

11. A direct access storage device as claimed in claim 10 wherein said predetermined track pitch equals 1/3 and said predetermined binary number of data cylinders equals 4.

12. A direct access storage device as claimed in claim 10 or claim 11 wherein said servo pattern writing means includes a clock having a frequency of 12 times a burst frequency of said servo pattern.

13. Apparatus substantially as hereinbefore described with reference to Figures 1 to 4.

This is the replacement sheet

Date: 09 JAN 1998