



PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05D 15/34, 15/12	A1	(11) International Publication Number: WO 98/42941 (43) International Publication Date: 1 October 1998 (01.10.98)
(21) International Application Number: PCT/GB98/00787 (22) International Filing Date: 17 March 1998 (17.03.98) (30) Priority Data: ① 9705721.0 ✓ 20 March 1997 (20.03.97) ✓ GB ✓ (71) Applicant (for all designated States except US): ① SECURISTYLE LIMITED (GB/GB); Kingsmead Industrial Estate, Princess Elizabeth Way, Cheltenham, Gloucestershire GL51 7RE (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): ① STRATFORD, Grant, Russell (GB/GB); 10 Oak Way, South Cerney, Gloucestershire GL7 5XX (GB); ② BAKER, Neil, Martin (GB/GB); 59 Colin Road, Barnwood, Gloucestershire GL4 7JN (GB). (74) Agent: JACKSON, Richard, Eric; Carpmaels & Ransford, 43 Bloomsbury Square, London WC1A 2RA (GB).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, (SG), SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU/ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. / 1 PD. 1 appln. 2 Invs. IPC = E05D 15/34 IPER 19/10/98	

(54) Title: A VENT ✓

This Sheet Has Been Replaced

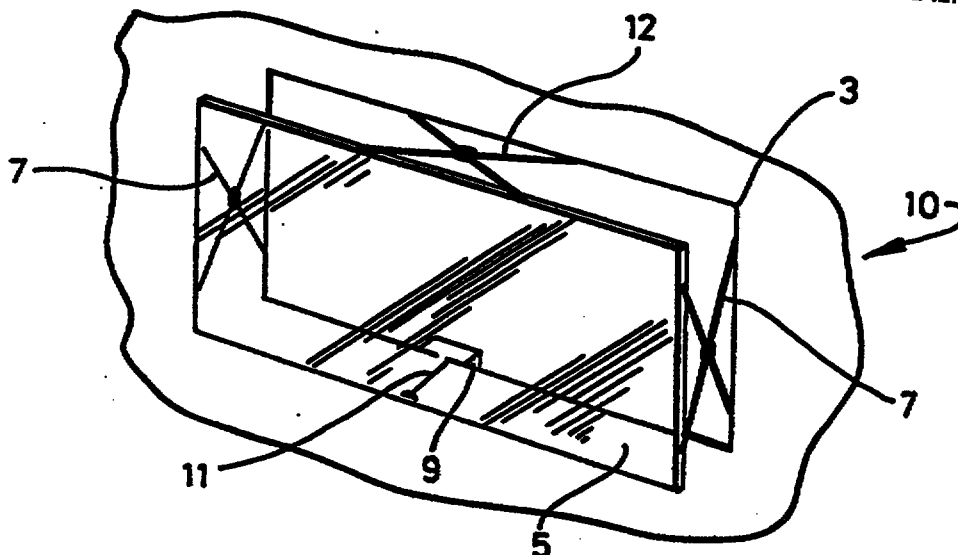

(57) Abstract

A vent (10) comprising a fixed frame (3) and an opening member (5) attached to the fixed frame (3) by hinges (7, 12), the opening member (5) being movable between a position closing the vent (10) and an open position by drive means (9), wherein three hinges (7, 12) support three sides of the opening member (5) and a fourth side is driven by the drive means (9). As a result, smoother opening of such a vent occurs without the need for a second drive means.