



(51) International Patent Classification:

H01R 12/71 (2011.01) *B60R 16/023* (2006.01)
H05K 1/02 (2006.01) *H01R 4/34* (2006.01)

(21) International Application Number:

PCT/SE2012/050949

(22) International Filing Date:

7 September 2012 (07.09.2012)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1150831-4 14 September 2011 (14.09.2011) SE

(71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SJÖLUND, Daniel** [SE/SE]; Solrosvägen 15, S-891 51 Örnköldsvik (SE).

(74) Agent: **ALBIHNS.ZACCO AB**; P.O. Box 5581, Valhallavägen 117, S-114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: CIRCUIT CARD CONFIGURATION

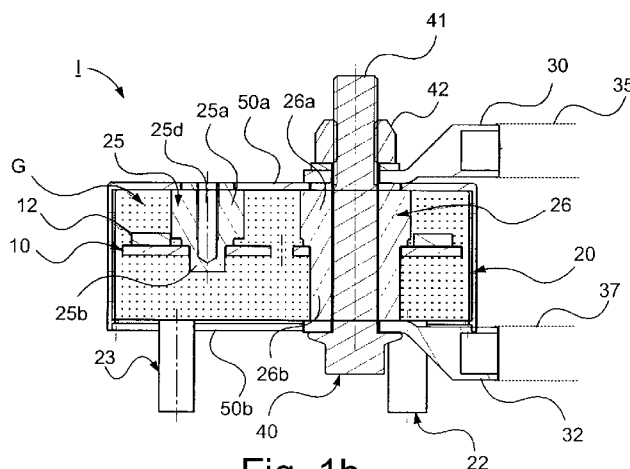


Fig. 1b

(57) Abstract: The present invention relates to a circuit card configuration (I) comprising a card element (10) being arranged to be attached via assembly points and to support connection points for signal connection and ground connection, characterized in that the respective assembly points as well as the respective connection points comprise a metallic bushing (21, 22, 23, 24, 25, 26) arranged to be attached at the card element (10).