




- (51) **International Patent Classification:**  
*E21B 28/00* (2006.01) *E21B 7/24* (2006.01)  
*E21B 10/60* (2006.01)
- (21) **International Application Number:**  
PCT/US2014/041459
- (22) **International Filing Date:**  
9 June 2014 (09.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 3000 North Sam Houston Parkway East, Houston, TX 77032 (US).
- (72) **Inventors:** GREENING, Aimee, K.; 2600 South Second Street, Duncan, OK 73533 (US). HOWARD, Robert, G.; 2600 South Second Street, Duncan, OK 73533 (US). AMBROSIO, Giuseppe; 7908 North Sam Houston Parkway West, Houston, TX 77064 (US).
- (74) **Agent:** SCHEER, Bradley, W.; Schwegman, Lundberg & Woessner, P.A., P.O. Box 2938, Minneapolis, MN 55402 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) **Title:** FLUIDIC OSCILLATOR BYPASS SYSTEM

FIG.2

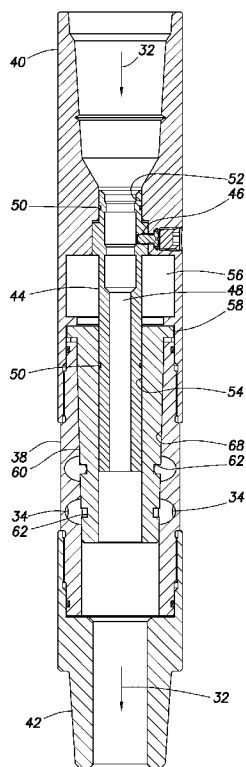

(57) **Abstract:** A fluidic oscillator assembly can include at least one fluidic oscillator, and a closure that in one position prevents flow through the oscillator to an exterior of the assembly, and in another position permits flow through the oscillator to the exterior. A method can include flowing fluid longitudinally through a fluidic oscillator assembly in a well, then diverting the fluid to flow outward from the assembly via at least one fluidic oscillator, the fluid being prevented from flowing longitudinally through the assembly. A well system can include a drill string having a fluidic oscillator assembly, a drill bit, and a drilling motor disposed between the drill bit and the assembly. The assembly can include a closure that in one position prevents fluid flow through a fluidic oscillator to an annulus formed between the drill string and a wellbore, and in another position permits fluid flow through the oscillator.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, KM, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

**Published:**

**Declarations under Rule 4.17:**

— *with international search report (Art. 21(3))*

— *as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii))*