

DATA TRANSMISSION CIRCUIT AND METHOD, CORE, CHIP, ELECTRONIC DEVICE AND STORAGE MEDIUM

TECHNICAL FIELD

[0001] The present disclosure relates to the field of data transmission technologies, and more particularly to a data transmission circuit, a processing core, a chip with a multi-core structure, a data transmission method, an electronic device and a computer-readable storage medium.

BACKGROUND

[0002] With the development of science and technology, human society is rapidly entering an era of intelligence. The important feature of the era of intelligence is that people may acquire more and more types of data, the amount of data that people may acquire is becoming larger and larger, and the demand for the data processing speed is becoming higher and higher.

[0003] Chips are the cornerstone of data processing, which essentially determine the ability to process data. From a perspective of application fields, the chips are mainly developed in two routes. One is general-purpose chips, for example, central processing units (CPU) and the like, which can provide great flexibility but have low effective computing power when processing algorithms in a specific field; the other is special-purpose chips, for example, tensor processing units (TPU) and the like, which have high effective computing power in certain specific fields but are poor in processing capacity or even have no processing capacity in flexible and universal fields.

[0004] Due to various data types and numerous data volumes in the era of intelligence, the chips are required to not only process changing algorithms in different fields with extremely high flexibility, but also rapidly process a great number of dramatically increasing data volumes with extremely strong processing capacities.

[0005] In chips with multi-core structures, one or more tasks may be completed across cores through cooperation. When the tasks are completed through cooperation, it is often required to transmit data or control information between cores. Thus, data transmission between cores becomes crucially important, and even becomes a critical factor affecting multi-core

computing power. In application, it is often required to send data of certain cores to a plurality of other cores.

[0006] FIG. 1 is a data transmission flowchart of broadcast data in a first existing technology. When a core C_i (referred to as a source core) needs to send a data packet to a plurality of cores (referred to as target cores), such as a core C_m and a core C_n , the data packet is broadcast through the following specific transmission process.

[0007] 1. The core C_i sends the data packet to a data exchange apparatus Fabric.

[0008] 2. The Fabric transmits the data packet to all other cores connected thereto.

[0009] 3. All other cores receive the data packet.

[0010] 4. Each of the other cores checks the data packet, and determines whether the data packet is aimed at the present core; if yes, for example, the core C_m and the core C_n retain the data packet and store the data packet in their memories Mem; if not, for example, a core C_j discards the data packet and does not store the data packet in its memory Mem.

[0011] In the data transmission manner of the first existing technology, the source core sends (broadcasts) the data to all other cores, which is equivalent to traverse paths to all other cores, thereby increasing power consumption, occupying the Fabric, and resulting in data blocking. Particularly, when a plurality of cores all send data to a plurality of other cores, serial processing is generated, thereby greatly reducing the utilization rate of the Fabric. Further, since each core receives the data, cores for which the data is unnecessary and invalid are required to process the data, thereby increasing burdens and the power consumption of circuits.

[0012] To alleviate the above problems in the first existing technology, a second existing technology as shown in FIG. 2 is provided. FIG. 2 is a data transmission flowchart of storing and relaying multi-cast data in the second existing technology. When the core C_i needs to send the data packet to a plurality of cores, such as the core C_m and the core C_n , the core C_i firstly sends the data packet to the core C_m , and the core C_m receives the data packet and stores the data packet in a local storage region Mem, and then reads out the data packet from the local storage region Mem and relays the data packet to the core C_n through the following specific transmission process.

[0013] 1. The core C_i sends the data packet to the data exchange apparatus Fabric.

[0014] 2. The Fabric transmits the data packet to the core C_m .

[0015] 3. The core C_m receives the data packet and stores the data packet in the local storage region Mem, and then checks whether the data packet needs to be sent to other cores; if yes,

for example, the data packet needs to be sent to the core C_n , then the core C_m reads out the data packet from the local storage region, resets a destination address as an address of the core C_n , and sends the data packet to the Fabric.

[0016] 4. The core C_n receives and stores the data packet, and performs the same process as step 3; if the data packet needs not to be sent to other cores, data transmission is ended.

[0017] In the data transmission manner of the second existing technology, an intermediate relay core needs to firstly write the data packet in a local storage region Mem after receiving the data packet, and then reads the data packet out of the local storage region Mem, thereby occupying the local storage region, affecting access to the local storage region by the core's own program, and reducing a utilization rate of the local storage region with large power consumption and long delay. At the same time, each core cannot repack and send data without participation of a dedicated control unit circuit, so that the process is complex.

SUMMARY

[0018] To solve at least one of the technical problems in the prior art, the present disclosure provides a data transmission circuit, a processing core, a chip with a multi-core structure, a data transmission method, an electronic device and a computer-readable storage medium.

[0019] According to a first aspect of the present disclosure, there is provided a data transmission circuit. The data transmission circuit includes a receiving unit, a controlling unit, a lookup table unit and a selecting unit, wherein

[0020] an input terminal of the receiving unit is for connecting to an output terminal of a data exchange apparatus Fabric, and an output terminal of the receiving unit is connected to an input terminal of the controlling unit, an input terminal of the lookup table unit and a first input terminal of the selecting unit respectively;

[0021] a control terminal of the controlling unit is connected to a control terminal of the lookup table unit and a control terminal of the selecting unit respectively;

[0022] an output terminal of the lookup table unit is connected to the first input terminal of the selecting unit;

[0023] the receiving unit is for receiving an original data packet from the Fabric, sending an original control bit of a header of the original data packet to the controlling unit, and sending an original index of the header of the original data packet to the lookup table unit;

[0024] the controlling unit is for determining whether the original data packet needs to be relayed based on the original control bit; and

[0025] in response to that the original data packet needs to be relayed, the controlling unit controls the first input terminal of the selecting unit to be enabled; and the selecting unit sends a new data packet to the Fabric via the first input terminal, wherein the new data packet includes original data and a new header acquired by the lookup table unit based on the original index.

[0026] In the data transmission circuit of the embodiment, storage of each data packet in the storage unit in the core and relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out. Thus, power consumption of the data transmission circuit may be reduced. Further, time for a subsequent data receiver to wait for data may be greatly reduced since storage and relay are performed in parallel. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and are analyzed by a local circuit, so that a micro-controlling unit is not occupied.

[0027] Optionally, sending by the selecting unit the new data packet to the Fabric via the first input terminal includes:

[0028] the lookup table unit acquires the new header based on the original index and sends the new header to the selecting unit; and

[0029] the selecting unit sends the new data packet to the Fabric via the first input terminal.

[0030] Optionally, the data transmission circuit further includes a splicing unit;

[0031] an input terminal of the splicing unit is connected to the output terminal of the lookup table unit and the output terminal of the receiving unit respectively, an output terminal of the splicing unit is connected to the first input terminal of the selecting unit, and a control terminal of the splicing unit is connected to the control terminal of the controlling unit; and sending by the selecting unit the new data packet to the Fabric via the first input terminal includes:

[0032] the lookup table unit acquires the new header based on the original index and sends the new header to the splicing unit;

[0033] the splicing unit forms the new data packet by packing the new header and the original data and sends the new data packet to the selecting unit; and

[0034] the selecting unit sends the new data packet to the Fabric via the first input terminal.

[0035] Optionally, the selecting unit further includes a second input terminal for connecting to a storage unit;

[0036] in response to that the original data packet needs not to be relayed, the controlling unit further controls the second input terminal of the selecting unit to be enabled; and

[0037] the selecting unit sends local data that is stored in the storage unit as a second data packet to the Fabric via the second input terminal.

[0038] Optionally, the selecting unit includes a selecting sub-unit and a sending sub-unit;

[0039] an input terminal of the sending sub-unit is connected to an output terminal of the selecting sub-unit;

[0040] an output terminal of the sending sub-unit is connected to the Fabric; and

[0041] the sending sub-unit is for sending the data packet output by the selecting sub-unit to the Fabric.

[0042] Optionally, the sending sub-unit includes a controlling sub-unit and a level setting sub-unit connected to the controlling sub-unit; wherein

[0043] the level setting sub-unit is for setting sending levels of the new data packet and the second data packet; and

[0044] the controlling sub-unit is for sending the new data packet and the second data packet according to the sending levels.

[0045] In the data transmission circuit of the embodiment, level setting is performed on data sent by the sending sub-unit to effectively ensure that important data is transmitted with priority, thereby effectively ensuring the efficiency of data transmission.

[0046] Optionally, the selecting sub-unit includes a first selection transistor and a second selection transistor; wherein

[0047] a control electrode of the first selection transistor is connected to the control terminal of the controlling unit, a first electrode of the first selection transistor is connected to the output terminal of the splicing unit, and a second electrode of the first selection transistor is connected to the input terminal of the sending sub-unit;

[0048] a control electrode of the second selection transistor is connected to the control terminal of the controlling unit, a first electrode of the second selection transistor is connected to the output terminal of the storage unit, and a second electrode of the second selection transistor is connected to the input terminal of the sending sub-unit; and

[0049] one of the first selection transistor and the second selection transistor is an N-type transistor, and the other is a P-type transistor.

[0050] Optionally, the sending levels are set so that the sending level of the new data packet is higher than the sending level of the second data packet; or

[0051] the sending levels are set so that the new data packet and the second data packet are sent alternately.

[0052] Optionally, in response to that the original data packet needs not to be relayed, the lookup table unit and/or the splicing unit are shut off.

[0053] In the data transmission circuit of the embodiment, in response to that the original data packet needs not to be relayed, the lookup table unit and/or the splicing unit are shut off, so that the power consumption of the transmission circuit may be effectively saved.

[0054] Optionally, the lookup table unit includes a lookup sub-unit and a storage sub-unit connected to the lookup sub-unit; wherein

[0055] the storage sub-unit is for pre-storing a lookup table, the lookup table including a plurality of items, and each item corresponding to a unique original index and including a new header;

[0056] and acquiring by the lookup table unit the new header based on the original index includes:

[0057] the lookup sub-unit looks up an item that corresponds to the original index from the lookup table as the new header and output the new header.

[0058] Optionally, the controlling unit includes a determining sub-unit and a transmitting sub-unit; wherein

[0059] the determining sub-unit is for determining whether the original data packet needs to be relayed according to a value of the original control bit; if yes, an output value of the determining sub-unit is set to 1; if not, the output value of the determining sub-unit is set to 0; and

[0060] the transmitting sub-unit is for transmitting the output value of the determining sub-unit to the lookup table unit and the selecting unit respectively; or the transmitting sub-unit is for transmitting the output value of the determining sub-unit to the lookup table unit, the selecting unit and the splicing unit respectively.

[0061] Optionally, the data transmission circuit further includes a changing unit connected to the receiving unit; wherein

[0062] the receiving unit is further for receiving a change request carrying a new control bit and a new index; and

[0063] the changing unit is for changing the header of the original data packet received by the receiving unit based on the change request.

[0064] Optionally, the data transmission circuit further includes:

[0065] the output terminal of the receiving unit is for connecting to the storage unit, and for sending the original data in the original data packet to the storage unit.

[0066] Optionally, the output terminal of the receiving unit is connected to the first input terminal of the selecting unit via the splicing unit; and the output terminal of the lookup table unit is connected to the first input terminal of the selecting unit via the splicing unit.

[0067] According to a second aspect of the present disclosure, there is provided a processing core. The processing core includes a storage unit and a data transmission circuit. The data transmission circuit is the foregoing data transmission circuit; wherein

[0068] the output terminal of the receiving unit is connected to an input terminal of the storage unit, and the second input terminal of the selecting unit is connected to an output terminal of the storage unit.

[0069] According to a third aspect of the present disclosure, there is provided a chip with a multi-core structure. The chip with the multi-core structure includes a plurality of processing cores and Fabric connecting the processing cores with each other. At least one of the processing cores includes the foregoing data transmission circuit, or at least one of the processing cores is the foregoing processing core.

[0070] According to a fourth aspect of the present disclosure, there is provided a data transmission method including the following specific steps:

[0071] receiving an original data packet in Fabric, wherein a header of the original data packet carries an original control bit and an original index;

[0072] determining whether the original data packet needs to be relayed based on the original control bit; and

[0073] in response to that the original data packet needs to be relayed, sending a new data packet to the Fabric, wherein the new data packet includes original data and a new header acquired based on the original index.

[0074] Optionally, the step of sending the new data packet to the Fabric specifically includes:

[0075] acquiring the new header based on the original index; and

[0076] sending the new data packet to the Fabric.

[0077] Optionally, the step of sending the new data packet to the Fabric specifically includes:

[0078] acquiring the new header based on the original index;

[0079] forming the new data packet by packing the new header and the original data; and

[0080] sending the new data packet to the Fabric.

[0081] Optionally, the method further includes:

[0082] in response to that the original data packet needs not to be relayed, sending local data as a second data packet to the Fabric.

[0083] Optionally, the method further includes:

[0084] setting sending levels of the new data packet and the second data packet; and

[0085] sending the new data packet and the second data packet according to the sending levels.

[0086] Optionally, the sending levels are set so that the sending level of the new data packet is higher than the sending level of the second data packet; or

[0087] the sending levels are set so that the new data packet and the second data packet are sent alternately.

[0088] Optionally, the method further includes:

[0089] in response to that the original data packet needs not to be relayed, stopping table lookup and/or stopping splicing.

[0090] Optionally, the step of acquiring the new header based on the original index specifically includes:

[0091] looking up an item that corresponds to the original index from the lookup table as the new header and outputting the new header, wherein the lookup table includes a plurality of items, and each item corresponds to a unique original index and includes a new header.

[0092] Optionally, the step of determining whether the original data packet needs to be relayed based on the original control bit specifically includes:

[0093] determining whether the original data packet needs to be relayed according to a value of the original control bit; if yes, setting an output value to 1; if not, setting the output value to 0.

[0094] Optionally, the method further includes:

[0095] receiving a change request carrying a new control bit and a new index; and

[0096] changing the received header of the original data packet based on the change request.

[0097] Optionally, the step of responding to that the original data packet needs to be relayed further includes:

[0098] sending the original data in the original data packet to a local storage unit.

[0099] According to a fifth aspect of the present disclosure, there is provided an electronic device, including:

[0100] one or more processors; and

[0101] a storage unit for storing one or more programs, wherein the one or more programs, upon execution by the one or more processors, cause the one or more processors to implement the foregoing data transmission method.

[0102] According to a sixth aspect of the present disclosure, there is provided a computer-readable storage medium storing a computer program, wherein the computer program, upon execution by a processor, causes the processor to implement the foregoing data transmission method.

[0103] In the data transmission circuit of the present disclosure, the storage of each data packet in the storage unit in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out. Thus, the power consumption of the data transmission circuit may be reduced. Further, the time for the subsequent data receiver to wait for data may be greatly reduced since storage and relay are performed in parallel. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

BRIEF DESCRIPTION OF THE DRAWINGS

[0104] FIG. 1 is a data transmission flowchart of broadcast data in a first existing technology;

[0105] FIG. 2 is a data transmission flowchart of storing and relaying multi-cast data in a second existing technology;

[0106] FIG. 3 is a structural schematic diagram of a data transmission circuit according to a first embodiment of the present disclosure;

[0107] FIG. 4 is a flowchart of relay transmission of data according to a second embodiment of the present disclosure;

[0108] FIG. 5 is a structural schematic diagram of a data transmission circuit according to a third embodiment of the present disclosure;

[0109] FIG. 6 is a structural schematic diagram of a selecting sub-unit in a data transmission circuit according to a fourth embodiment of the present disclosure;

[0110] FIG. 7 is a structural schematic diagram of a sending sub-unit in a data transmission circuit according to a fifth embodiment of the present disclosure;

[0111] FIG. 8 is a structural schematic diagram of a lookup table unit in a data transmission circuit according to a sixth embodiment of the present disclosure;

[0112] FIG. 9 is a structural schematic diagram of a controlling unit in a data transmission circuit according to a seventh embodiment of the present disclosure;

[0113] FIG. 10 is a structural schematic diagram of a data transmission circuit according to an eighth embodiment of the present disclosure; and

[0114] FIG. 11 is a flowchart of a data transmission method according to a ninth embodiment of the present disclosure.

DETAILED DESCRIPTION

[0115] To help those skilled in the art understand technical solutions of the present disclosure better, the present disclosure is further described in detail below in combination with accompanying drawings and specific embodiments.

[0116] In multi-core or many-core chips, different cores on the chip are connected with each other via Fabric to transmit data, and each core includes a storage unit and a data transmission circuit. An embodiment of the present disclosure provides a data transmission circuit applied to the above multi-core or many-core chip.

[0117] As shown in FIG. 3, a first optional embodiment of the present disclosure relates to a data transmission circuit TR. The data transmission circuit TR includes a receiving unit Rx, a controlling unit Ctrl, a lookup table unit LUT and a selecting unit Sx. An input terminal of the receiving unit Rx is for connecting to an output terminal of a data exchange apparatus Fabric, and an output terminal of the receiving unit Rx is connected to an input terminal of the controlling unit Ctrl, an input terminal of the lookup table unit LUT and a first input terminal In1 of the selecting unit Sx respectively; and the output terminal of the receiving unit Rx is also connected to an input terminal of a storage unit Memory in a core Core. A control terminal of the controlling unit Ctrl is connected to a control terminal of the lookup table unit LUT and a control terminal of the selecting unit Sx respectively, and an output terminal of the lookup table unit LUT is connected to the first input terminal In1 of the selecting unit Sx.

[0118] Specifically, the receiving unit Rx is configured to receive an original data packet from the Fabric and send original data in the original data packet to the selecting unit Sx, send an original control bit C0 of a header of the original data packet to the controlling unit Ctrl, and send an original index Index of the header of the original data packet to the lookup

table unit LUT. The controlling unit Ctrl is configured to determine whether the original data packet needs to be relayed based on the original control bit C0; if yes, the controlling unit sends a relay control signal; if not, the controlling unit sends a non-relay control signal. In response to that the original data packet needs to be relayed, that is, in response to receiving the relay control signal, the controlling unit Ctrl is configured to control the first input terminal In1 of the selecting unit Sx to be enabled; in this way, the selecting unit Sx is configured to send a new data packet to the Fabric via the first input terminal In1. The new data packet includes the original data and a new header acquired by the lookup table unit LUT based on the original index, and the new header includes a new control bit, a new index and a target address.

[0119] Referring to FIG. 3 and FIG. 4, for example, the core C_i needs to send the original data packet to a plurality of cores, such as the core C_m and the core C_n , wherein the core C_m and the core C_n are both provided with the data transmission circuit as shown in FIG. 3.

[0120] Specifically, the data transmission process between the core C_i and the core C_m is as follows.

[0121] The core C_i firstly sends the original data packet to the Fabric, and the receiving unit Rx in the core C_m receives the original data packet from the Fabric and sends a control bit in the original data packet to the controlling unit Ctrl and sends an index in the original data packet to the lookup table unit LUT. The controlling unit Ctrl checks the control bit C0 of the header of the original data packet, and outputs a value C1 when determining that the original data packet needs to be relayed; the lookup table unit LUT looks up a corresponding new header from the lookup table based on the original index Index of the header of the original data packet, that is, a new header corresponding to a next destination core C_n , wherein the new header includes a new control bit (that is, whether data transmitted to the core C_n needs to be further relayed), a new index (that is, an index of a next destination to which the data transmitted to the core C_n is further relayed) and a target address (the target address is the address of the core C_n). Then, the selecting unit Sx sends a new data packet composed of the new header and the original data to the Fabric via the first input terminal In1 of the selecting unit, and the Fabric sends the new data packet to the core C_n .

[0122] Further, the receiving unit Rx in the core C_n receives the new data packet from the Fabric, the controlling unit Ctrl in the core C_n checks the control bit in the header of the new data packet. When determining that the new data packet needs not to be relayed according

to the control bit, the data in the new data packet is stored in a storage unit Memory of the core C_n , and the transmission of the new data packet is ended.

[0123] In the data transmission circuit of the embodiment, it is not required to firstly store the data packet in the storage unit in the core and then read the data packet out, thereby reducing the power consumption of the transmission circuit. In addition, the storage of each data packet in the storage unit Memory in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out, thereby greatly reducing the time that the subsequent data receiver waits for the data. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

[0124] It should be noted that each unit structure of the data transmission circuit in the embodiment may be implemented in the form of a hardware circuit. For example, the receiving unit Rx may be of a receiver structure, the controlling unit Ctrl may be of a comparator structure that determines whether the data packet needs to be relayed according to the control bit, and the selecting unit Sx may be a selector that determines whether to output the corresponding data packet to the Fabric according to the control bit. Certainly, in addition to the above form of hardware, each unit structure of the transmission circuit in the embodiment may also be implemented in the form of software, as long as functions corresponding to each unit can be implemented.

[0125] The data transmission circuit TR according to a second optional embodiment of the present disclosure may further include a splicing unit Merge, as shown in FIG. 5.

[0126] An input terminal of the splicing unit Merge is connected to the output terminal of the lookup table unit LUT and the output terminal of the receiving unit Rx respectively, an output terminal of the splicing unit Merge is connected to the first input terminal In1 of the selecting unit Sx, and a control terminal of the splicing unit Merge is connected to the control terminal of the controlling unit Ctrl. The splicing unit Merge is configured to form a new data packet by packing the original data and the new header acquired by the lookup table unit LUT from the lookup table based on the original index, and send the new data packet to the selecting unit Sx.

[0127] It may be understood that, since the splicing unit Merge is added, the output terminal of the receiving unit Rx is connected to the first input terminal In1 of the selecting unit Sx

via the splicing unit Merge; the output terminal of the lookup table unit LUT is connected to the first input terminal In1 of the selecting unit Sx via the splicing unit Merge.

[0128] It should be noted that a specific structure of the splicing unit Merge is not limited herein. For example, the splicing unit Merge may be a simple splicing circuit that splices pure data and the new header acquired from the lookup table unit LUT together.

[0129] It may be understood that the following relevant descriptions of the second optional embodiment are also applicable to the foregoing first optional embodiment without the splicing unit Merge, except that a position where the original data and the new header are packed is changed. In the first optional embodiment, packing and splicing are performed in the selecting unit Sx; and in the second optional embodiment, packing and splicing are performed in the splicing unit Merge. Those skilled in the art may understand that other descriptions are applicable to both optional embodiments.

[0130] As shown in FIG. 5, the selecting unit Sx further includes a second input terminal In0. The second input terminal In0 is connected to the output terminal of the storage unit Memory, reads from the storage unit Memory data in the core, i.e., a second data packet stored in the core, and sends the second data packet to the Fabric. The data in the core may be a packed data packet. At this time, in response to that the original data packet needs not to be relayed, the controlling unit Ctrl is further configured to control the second input terminal In0 of the selecting unit Sx to be enabled; in this way, the selecting unit Sx may directly send the second data packet to the Fabric.

[0131] Optionally, the controlling unit Ctrl may only connect the second input terminal and the storage unit when the second input terminal In0 of the selecting unit Sx is enabled. However, the selecting unit may choose not to output, and of course, it may also send signals such as an ending relay transmission signal.

[0132] Further, when the core in which the data transmission circuit is located is used as the source core (i.e., the data sending core), the controlling unit sends a control signal to the control terminal of the selecting unit, and controls the second input terminal of the selecting unit to be enabled; and further, the data stored in the storage unit is sent to the Fabric via the second input terminal of the selecting unit, and is sent to the target core by the Fabric.

[0133] It should be noted that a specific implementation structure in which the first input terminal In1 and the second input terminal In0 of the selecting unit Sx are connected to the output terminal of the splicing unit Merge and the output terminal of the storage unit

Memory is not limited herein. Those skilled in the art may design a circuit structure satisfying such connection manner according to actual requirements.

[0134] As shown in FIG. 3 and FIG. 5, the selecting unit Sx includes a selecting sub-unit S and a sending sub-unit Tx; an input terminal of the sending sub-unit Tx is connected to an output terminal of the selecting sub-unit S; and an output terminal of the sending sub-unit Tx is connected to the Fabric. In this way, the sending sub-unit Tx may send the data packet output by the selecting sub-unit S to the Fabric.

[0135] Specifically, as shown in FIG. 6, the selecting sub-unit S includes a first selection transistor T1 and a second selection transistor T2. A control electrode of the first selection transistor T1 is connected to the control terminal of the controlling unit Ctrl, a first electrode of the first selection transistor T1 is connected to the output terminal of the splicing unit Merge, and a second electrode of the first selection transistor T1 is connected to the input terminal of the sending sub-unit Tx. A control electrode of the second selection transistor T2 is connected to the control terminal of the controlling unit Ctrl, a first electrode of the second selection transistor T2 is connected to the output terminal of the storage unit Memory, and a second electrode of the second selection transistor T2 is connected to the input terminal of the sending sub-unit Tx. Further, one of the first selection transistor T1 and the second selection transistor T2 is an N-type transistor, and the other is a P-type transistor.

[0136] It should be noted that, for the first selection transistor T1 and the second selection transistor T2, the control electrodes are gate electrodes, the first electrodes may be source electrodes, and the second electrodes may be drain electrodes; or the first electrodes may be drain electrodes, and the second electrodes may be source electrodes. In addition, when the first selection transistor T1 is the N-type transistor (which is turned on when the control electrode thereof receives a high-level signal), the second selection transistor is the P-type transistor (which is turned on when the control electrode thereof receives a low-level signal), and vice versa.

[0137] As shown in FIG. 7, the sending sub-unit Tx includes a controlling sub-unit Tx_1 and a level setting sub-unit Tx_2 connected to the controlling sub-unit Tx_1. The level setting sub-unit Tx_2 is configured to set sending levels of the new data packet and the data packet in the core (i.e., the second data packet). The controlling sub-unit Tx_1 is configured to send the new data packet and the data packet in the core according to the sending levels.


[0138] It should be noted that a specific rule for the sending level is not limited. For example, the new data packet may be processed with priority; or sending priority may be equally

distributed, that is, the new data packet and the second data packet are sent alternately. The specific rule for the sending level may be determined according to actual requirements.

[0139] In the data transmission circuit of the embodiment, level setting is performed on the data sent by the sending sub-unit Tx to effectively ensure that important data is transmitted with priority, thereby effectively ensuring the data transmission efficiency.

[0140] As shown in FIG. 8, the lookup table unit LUT includes a lookup sub-unit LUT_1 and a storage sub-unit LUT_2 connected to the lookup sub-unit LUT_1. The storage sub-unit LUT_2 is configured to pre-store a lookup table. The lookup table includes a plurality of items, and each item corresponds to a unique original index and includes a new header. The lookup sub-unit LUT_1 is configured to lookup an item that corresponds to the original index from the lookup table as a new header based on the original index.

[0141] Specifically, for example, the storage sub-unit LUT_2 stores a plurality of items, and each item is a complete header, as shown in the following table.

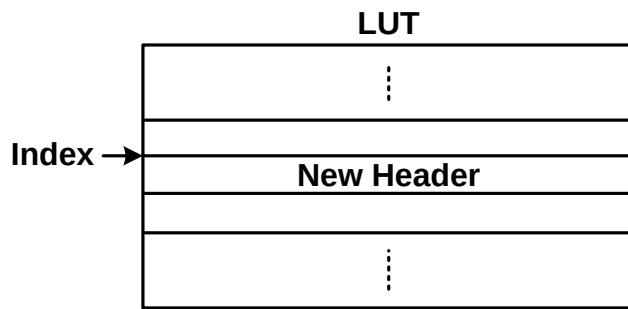

[0142] Index is an index that uniquely corresponds to an item in the LUT. The item to which the Index points is a new header NewHeader of the new data packet that will be spliced with the original data in the splicing unit Merge and sent out.

[0143] The content of the item in the LUT is also the content of the new header NewHeader as follows:

C0	Index	Addr_dest
-----------	--------------	------------------

[0144] In the above table, C0 is a new control bit that determines whether the new data packet needs to be further relayed, Index is an index of the LUT, and Addr_dest is a destination address of the new data packet, which may be a target core address, or a target core address and a target storage address.

[0145] Preferably, to effectively save the power consumption of the transmission circuit, when receiving a non-relay signal, that is, in response to that the original data packet needs not to be relayed, the lookup table unit LUT and the splicing unit Merge are shut off. That

is, a table lookup function and a merging and packing function are stopped. The shut-off of the lookup table unit LUT and the splicing unit Merge effectively saves the power consumption.

[0146] As shown in FIG. 5 and FIG. 9, the controlling unit Ctrl includes a determining sub-unit Ctrl_1 and a transmitting sub-unit Ctrl_2. The determining sub-unit Ctrl_1 is configured to determine whether the original data packet needs to be relayed according to a value of the original control bit; if yes, an output value C1 of the determining sub-unit Ctrl_1 is set to a first value, for example, 1; if not, the output value C1 of the determining sub-unit Ctrl_1 is set to a second value different from the first value, for example, 0. The transmitting sub-unit Ctrl_2 is configured to transmit the output value C1 of the determining sub-unit Ctrl_1 to the lookup table unit LUT and the splicing unit Merge respectively.

[0147] As shown in FIG. 10, the data transmission circuit TR further includes a changing unit Gx connected to the receiving unit Rx. The receiving unit Rx is further configured to receive a change request carrying a new control bit and a new index. The changing unit Gx is configured to change the header of the original data packet received by the receiving unit based on the change request. For example, a local MCU or host may perform change according to different tasks, so as to transmit data in different task states.

[0148] As shown in FIG. 3 and FIG. 5, a third optional embodiment of the present disclosure provides a processing core Core including a storage unit Memory and a data transmission circuit. The data transmission circuit is the foregoing data transmission circuit TR with a specific structure for which reference may be made to the above relevant descriptions, which will not be repeated herein. The output terminal of the receiving unit Rx is connected to the input terminal of the storage unit Memory, and the second input terminal In0 of the selecting unit Sx is connected to the output terminal of the storage unit Memory.

[0149] The processing core of the embodiment has the foregoing data transmission circuit, and it is not required to firstly store the data packet in the storage unit in the core and then read the data packet out, thereby reducing the power consumption of the transmission circuit. In addition, the storage of each data packet in the storage unit Memory in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out, thereby greatly reducing the time that the subsequent data receiver waits for the data. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

[0150] A fourth optional embodiment of the present disclosure provides a chip with a multi-core structure. The chip with the multi-core structure includes a plurality of cores and Fabric connecting the processing cores with each other. At least one processing core includes the foregoing data transmission circuit with the specific structure for which reference may be made to the above relevant descriptions, which will not be repeated herein; or, at least one processing core is the foregoing processing core.

[0151] The chip with the multi-core structure of the embodiment has the foregoing data transmission circuit or processing core, and it is not required to firstly store the data packet in the storage unit in the core and then read the data packet out, thereby reducing the power consumption of the transmission circuit. In addition, the storage of each data packet in the storage unit Memory in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out, thereby greatly reducing the time that the subsequent data receiver waits for the data. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

[0152] As shown in FIG. 11, a fifth optional embodiment of the present disclosure provides a data transmission method S100. The data transmission method S100 may adopt the structure of the foregoing data transmission circuit, for which reference may be specifically made to the above relevant descriptions that will not be repeated herein. Specifically, the data transmission method S100 may include the following steps.

[0153] In S110, an original data packet in Fabric is received, wherein a header of the original data packet carries an original control bit and an original index.

[0154] In S120, whether the original data packet needs to be relayed is determined based on the original control bit.

[0155] In S130, in response to that the original data packet needs to be relayed, a new data packet is sent to the Fabric, wherein the new data packet includes original data and a new header acquired based on the original index.

[0156] In the data transmission method of the embodiment, it is not required to firstly store the data packet in the storage unit in the core and then read the data packet out, thereby reducing the power consumption of the transmission circuit. In addition, the storage of each data packet in the storage unit Memory in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading

the data packet out, thereby greatly reducing the time that the subsequent data receiver waits for the data. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

[0157] Specifically, the step of sending the new data packet to the Fabric includes:

[0158] acquiring a new header from a preset lookup table based on the original index, forming a new data packet by packing the new header and the original data, and then sending the new data packet to the Fabric.

[0159] Specifically, as shown in FIG. 11, the data transmission method S100 further includes the following step.

[0160] In S140, in response to that the original data packet needs not to be relayed, local data as a second data packet is sent to the Fabric.

[0161] To transmit the data efficiently, the data transmission method further includes the following step.

[0162] After sending levels of the new packet and the second data packet are set, the new packet and the second data packet are sent according to the sending levels. For example, the sending levels are set so that the sending level of the new data packet is higher than the sending level of the second data packet, or the new packet and the second data packet are sent alternately.

[0163] To reduce the power consumption, the data transmission method S100 further includes:

[0164] in response to that the original data packet needs not to be relayed, stopping table lookup and/or splicing.

[0165] Optionally, step S120 specifically includes:

[0166] determining whether the original data packet needs to be relayed according to a value of the original control bit; if yes, setting an output value to 1; if not, setting the output value to 0.

[0167] Optionally, the data transmission method further includes:

[0168] receiving a change request carrying a new control bit and a new index; and

[0169] changing the received header of the original data packet based on the change request.

[0170] A sixth optional embodiment of the present disclosure provides an electronic device, including:

[0171] one or more processors; and

[0172] a storage unit configured to store one or more programs, wherein the one or more programs, when executed by the one or more processors, cause the one or more processors to implement the foregoing data transmission method.

[0173] The electronic device of the embodiment stores the program in the storage unit thereof, and the program, when executed by the processor, causes the processor to implement the foregoing data transmission method. It is not required to firstly store the data packet in the storage unit in the core and then read the data packet out, thereby reducing the power consumption of the transmission circuit. In addition, the storage of each data packet in the storage unit Memory in the core and the relay transmission of each data packet are performed in parallel rather than firstly writing the data packet in and then reading the data packet out, thereby greatly reducing the time that the subsequent data receiver waits for the data. In addition, parameters required in the entire data transmission process are contained in the header of the sent data packet and analyzed by the local circuit, so that the micro-controlling unit is not occupied.

[0174] A seventh optional embodiment of the present disclosure provides a computer-readable storage medium storing a computer program. The computer program, when executed by a processor, causes the processor to implement the foregoing data transmission method, for which reference may be specifically made to the above relevant descriptions.

[0175] The computer-readable storage medium may be included in an apparatus, device and system of the present disclosure, or may be provided independently.

[0176] The computer-readable storage medium may be any tangible medium that contains or stores a program, and may be an electronic, magnetic, optical, electromagnetic, infrared or semi-conductor system, apparatus or device. More specific examples of the computer-readable storage medium include but not limited to, an electrical connection having one or more wires, a portable computer diskette, a hard disk, an optical fiber, a random-access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or flash memory), a portable compact disc read-only memory (CD-ROM), an optical storage device, a magnetic storage device, or any suitable combination of the foregoing.

[0177] The computer-readable storage medium may further include a data signal with a computer-readable program code embodied therein propagated in a baseband or as part of a carrier wave. Specific examples of the propagated data signal include but not limited to, electromagnetic signals, optical signals or any suitable combination of the foregoing.

[0178] It may be understood that the above embodiments are merely illustrative embodiments used for describing principles of the present disclosure but not intended to limit the present disclosure. Those of ordinary skill in the art may make various modifications and improvements without departing from the spirit and essence of the present disclosure, and these modifications and improvements shall also be encompassed in the scope of protection of the present disclosure.

CLAIMS

1. A data transmission circuit, comprising a receiving unit, a controlling unit, a lookup table unit and a selecting unit, wherein

an input terminal of the receiving unit is for connecting to an output terminal of a data exchange apparatus Fabric, and an output terminal of the receiving unit is connected to an input terminal of the controlling unit, an input terminal of the lookup table unit and a first input terminal of the selecting unit respectively;

a control terminal of the controlling unit is connected to a control terminal of the lookup table unit and a control terminal of the selecting unit respectively;

an output terminal of the lookup table unit is connected to the first input terminal of the selecting unit;

the receiving unit is for receiving an original data packet from the Fabric, sending an original control bit of a header of the original data packet to the controlling unit, and sending an original index of the header of the original data packet to the lookup table unit;

the controlling unit is for determining whether the original data packet needs to be relayed based on the original control bit; and

in response to that the original data packet needs to be relayed, the controlling unit controls the first input terminal of the selecting unit to be enabled; and the selecting unit sends a new data packet to the Fabric via the first input terminal, wherein the new data packet comprises original data and a new header acquired by the lookup table unit based on the original index.

2. The data transmission circuit according to claim 1, wherein sending by the selecting unit the new data packet to the Fabric via the first input terminal comprises:

the lookup table unit acquires the new header based on the original index and sends the new header to the selecting unit; and

the selecting unit sends the new data packet to the Fabric via the first input terminal.

3. The data transmission circuit according to claim 1 or 2, further comprising a splicing unit, wherein

an input terminal of the splicing unit is connected to the output terminal of the lookup table unit and the output terminal of the receiving unit respectively, an output terminal of

the splicing unit is connected to the first input terminal of the selecting unit, and a control terminal of the splicing unit is connected to the control terminal of the controlling unit; and sending by the selecting unit the new data packet to the Fabric via the first input terminal comprises:

- the lookup table unit acquires the new header based on the original index and sends the new header to the splicing unit;

- the splicing unit forms the new data packet by packing the new header and the original data and sends the new data packet to the selecting unit; and

- the selecting unit sends the new data packet to the Fabric via the first input terminal.

4. The data transmission circuit according to any one of claims 1 to 3, wherein the selecting unit further comprises a second input terminal for connecting to a storage unit;

- in response to that the original data packet needs not to be relayed, the controlling unit further controls the second input terminal of the selecting unit to be enabled; and

- the selecting unit sends local data that is stored in the storage unit as a second data packet to the Fabric via the second input terminal.

5. The data transmission circuit according to any one of claims 1 to 4, wherein the selecting unit comprises a selecting sub-unit and a sending sub-unit;

- an input terminal of the sending sub-unit is connected to an output terminal of the selecting sub-unit;

- an output terminal of the sending sub-unit is connected to the Fabric; and

- the sending sub-unit is for sending data packet output by the selecting sub-unit to the Fabric.

6. The data transmission circuit according to claim 5, wherein the sending sub-unit comprises a controlling sub-unit and a level setting sub-unit connected to the controlling sub-unit;

- the level setting sub-unit is for setting sending levels of the new data packet and the second data packet; and

- the controlling sub-unit is for sending the new data packet and the second data packet according to the sending levels.

7. The data transmission circuit according to any one of claims 1 to 6, wherein:
in response to that the original data packet needs not to be relayed, the lookup table unit and/or the splicing unit are shut off.

8. The data transmission circuit according to any one of claims 1 to 7, wherein the lookup table unit comprises a lookup sub-unit and a storage sub-unit connected to the lookup sub-unit;

the storage sub-unit is for pre-storing a lookup table, the lookup table comprising a plurality of items, and each item corresponding to a unique original index and comprising a new header;

and acquiring by the lookup table unit the new header based on the original index comprises:

the lookup sub-unit looks up an item that corresponds to the original index from the lookup table as the new header and output the new header.

9. The data transmission circuit according to any one of claims 1 to 8, wherein the controlling unit comprises a determining sub-unit and a transmitting sub-unit;

the determining sub-unit is for determining whether the original data packet needs to be relayed according to a value of the original control bit; if yes, an output value of the determining sub-unit is set to 1; if not, the output value of the determining sub-unit is set to 0; and

the transmitting sub-unit is for transmitting the output value of the determining sub-unit to the lookup table unit and the selecting unit respectively; or the transmitting sub-unit is for transmitting the output value of the determining sub-unit to the lookup table unit, the selecting unit and the splicing unit respectively.

10. The data transmission circuit according to any one of claims 1 to 9, further comprising a changing unit connected to the receiving unit, wherein

the receiving unit is further for receiving a change request carrying a new control bit and a new index; and

the changing unit is for changing the header of the original data packet received by the receiving unit based on the change request.

11. The data transmission circuit according to any one of claims 4 to 10, wherein:
the output terminal of the receiving unit is for connecting to the storage unit, and for sending the original data in the original data packet to the storage unit.

12. A processing core, comprising a storage unit and the data transmission circuit according to any one of claims 1 to 11; wherein

the output terminal of the receiving unit is connected to an input terminal of the storage unit, and the second input terminal of the selecting unit is connected to an output terminal of the storage unit.

13. A chip with a multi-core structure, comprising a plurality of processing cores and Fabric connecting the processing cores with each other, wherein at least one of the processing cores comprises the data transmission circuit according to any one of claims 1 to 11, or at least one of the processing cores is the processing core according to claim 12.

14. A data transmission method, comprising:

receiving an original data packet in Fabric, wherein a header of the original data packet carries an original control bit and an original index;

determining whether the original data packet needs to be relayed based on the original control bit; and

in response to that the original data packet needs to be relayed, sending a new data packet to the Fabric, wherein the new data packet comprises original data and a new header acquired based on the original index.

15. An electronic device, comprising:

one or more processors; and

a storage unit for storing one or more programs, wherein the one or more programs, upon execution by the one or more processors, cause the one or more processors to implement the data transmission method according to claim 14.

16. A computer-readable storage medium storing a computer program, wherein

the computer program, upon execution by a processor, causes the processor to implement the data transmission method according to claim 14.