

TITLE OF THE INVENTION

Method of rewriting message receive control  
information stored in radio pager

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to improvements in a  
radio pager, and more specifically to a technique which  
enables the pager to be selectively set so that a  
message, which is directed to a given pager ID code, can  
10 be prevented from being displayed and/or normally  
processed. Still more specifically, the present  
invention finds an extensive use in restoring a radio  
pager to a normal use in the event that the pager assumes  
a condition wherein all the pager ID codes assigned  
15 thereto are rendered inoperative.

Description of the Prior Art

Radio pagers which are equipped with a display  
function have proven very popular in that a large amount  
of data can be acquired at one calling as compared with  
20 an older style type pager which alerts a person to call a  
single predetermined phone number merely by means of  
sound and/or flashing light.

Currently it is common to provide the above  
mentioned display function equipped pager with a  
25 plurality of pager ID (Identification) codes for  
expanding the usage of a radio pager.

In addition it is a concurrent trend to reduce the  
size and weight of a radio pager for the convenience of  
portability thereof. However, this tendency tends to  
30 induce the problem that a pager is liable to be lost  
and/or fall into the hands of a person different from the  
actual subscriber. In such a case, it is desirable for a  
pager service company to be able to render the pager  
inoperative. It is of course also desirable for a  
35 service company to be able to partially or totally

## REPLACED SHEETS SG

- ☒ Description : paged .....<sup>3</sup> to paged .....<sup>4</sup>.....  
☒ Claim(s) : paged .....<sup>11</sup> to paged .....<sup>12</sup>.....  
☒ Drawing(s) : paged .....<sup>1</sup> to paged .....<sup>7</sup>.....  
☒ Abstract : paged .....<sup>13</sup> to paged .....<sup>14</sup>.....

disable a pager in the event that a subscriber does not return a rental pager and/or fails to pay the required service fees.

U.S. Patent No. 4,639,726 which was issued on  
5 January 27, 1987 and assigned to the same entity as the instant application, discloses a technique which enables a pager service company to issue a predetermined signal which prevents one or more of the pager ID codes from being compared with the pager address code contained in  
10 subsequent transmissions, and thus renders the arrangement either partially or totally inoperative.

That is to say, with the above mentioned technique, a predetermined signal which follows a pager address signal is used to inhibit or disables the receiving  
15 operation of a given pager and subsequently causes the display to be driven to exhibit thereon "particular messages" transmitted with the predetermined signal. These messages may take the form of "lost", "theft" and/or a predetermined telephone number, by way of  
20 example.

More specifically, this prior art is designed to inhibit the comparison of a given pager ID code with the incoming pager address code by a pager service company. Accordingly, the pager refuses the reception of the  
25 message directed to the pager ID code or codes which have been inhibited. Thus, as long as a single pager ID code is available for comparison with the pager address code, the other pagers ID codes can be restored to a condition wherein the services rendered by the service company are again receivable. That is, the service company is able  
30 to return the pager ID codes, which have been rendered inoperative, to the original status using the single ID code still in use.

However, in the event that the pager assumes a  
35 condition wherein all the pager ID codes are rendered

inoperative, the pager per se must be returned to the pager service company for PROM (Programmable Read Only Memory) rewriting. This is awkward and a waste of time for both the subscriber and the service company.

5

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method which is able to return a radio pager to a normal use in the event that the pager assumes a condition wherein all the pager ID codes assigned thereto are rendered inoperative.

10

More specifically an aspect of the present invention comes in a method of enabling/disabling message receipt in a radio pager, comprising the steps of: (a) receiving a radio transmission which is comprised of a pager address code and a message signal which follows said pager address code; (b) comparing the pager address code with a predetermined pager ID code; (c) acquiring the message signal in the event that the pager address code coincides with the pager ID code; (d) checking if control information is present within said message signal; (e) extracting said control information from said message signal in the event of a positive outcome in step (d); and (f) rewriting a piece of message receive control data which determines if the message signal is displayed or disregarded, in the event that the control code is found in the message signal.

15

20

25

30

35

Another aspect of the present invention comes in a method of rewriting message receive control information which has been stored in a radio pager, each piece of said message receive control information being assigned to one of plural pager ID codes previously allocated to said radio pager and indicating if a message directed to the corresponding pager ID code is acceptable, said method comprising the steps of: (a) receiving, at said radio pager, a pager address code which is followed by a



message signal; (b) comparing the pager address code with each of said pager ID codes; (c) acquiring the message signal in the event that the pager address code coincides with one of said pager ID codes; (d) checking if control codes are present within said message signal, said control codes including message receive control data by which said one of pieces of message receive control information is rewritten; and (e) rewriting one of pieces of the message information by the message receive control data transmitted in the event that the control codes are found to be present within said message signal in step (d).

#### BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will become more clearly appreciated from the following description taken in conjunction with the accompanying drawings in which like elements are denoted by like reference numerals and in which:

Fig. 1 is a block diagram which schematically illustrates a pager of the nature to which the present invention is applicable;

Fig. 2 is a chart depicting formats of the signals which are applied to the radio pager;

Fig. 3 is a chart which depicts function codes and characters which are defined by ISO 646 and are used in the embodiment of the present invention;

Fig. 4 depicts a memory map which indicates the allocation of contents stored in a non-volatile memory of the pager illustrated in Fig. 1:

Fig. 5 is a flow chart which characterize the operations of the embodiment of the present invention;

Fig. 6 is a sketch for describing the embodiment of the present invention; and

Fig. 6 is a flow chart which depicts the operations which occur during normal pager usage in accordance with



the present invention.

DETAILED DESCRIPTION OF THE  
PREFERRED EMBODIMENTS

Fig. 1 is a block diagram showing a hardware  
5 arrangement of a radio pager 10 to which the present  
invention is applied.

A front end (viz., radio section) 12 is provided for  
amplifying and demodulating a code-modulated carrier wave  
received by an antenna 14. The front end 12 is  
10 conventional in construction and arrangement and  
comprises a high frequency amplifier, a frequency  
converter, an IF amplifier and a discriminator (not  
illustrated in Fig. 1). The output of the front end 12  
is applied to a decoder 16 which is arranged to compare  
15 an incoming pager address code with each of plural pager  
ID (Identification) codes stored in a memory 18. The  
pager ID codes in the memory 18 are written thereinto  
from a non-volatile memory 20 when the pager 10 is  
switched on. In the event that the incoming pager  
20 address code coincides with one of the pager ID codes,  
the decoder 16 applies a message signal, which follows  
the coincident pager address code, to a CPU (Central  
Processing Unit)) or message receipt controller 22. It  
is known in the art that the message signal is applied to  
25 the CPU 22 after being subject to error correction in  
decoder 16.

In the event that the CPU 22 detects that the  
message signal applied thereto is directed to a pager ID  
code through which the receipt of a message is permitted,  
30 the CPU 22 energizes a speaker 24 by way of a speaker  
driver 26. Although not shown in Fig. 1, a light source  
such as an LED (Light Emitting Diode) or the like, may be  
installed to provide a visible signal in addition to the  
audible one produced by the speaker 24. Further, the CPU  
35 22 stores the message in a RAM (Random Access Memory) 28

and simultaneously induces the same to appear on a display 30 using a display controller 32 in a manner known in the art.

5 The CPU 22 is arranged to control the overall operations of the pager 10 using a program which is previously stored in a ROM 34.

Fig. 2 shows, by way of example, a code format which may be used with the present invention. Such a code format has been proposed by the POCSAG (British Post  
10 Office Code Standardization Advisory Group). It should be noted however, that the present invention is not limited to the code format shown in Fig. 2. As shown at the uppermost row of Fig. 2, a transmission consists of a preamble, a synchronization code (SC), a frame  
15 synchronization code (FC), a pager address codeword, and a plurality of message (viz., data) codewords denoted by D1, D2, D3, D4, D5, .... in this order.

Each of message codewords D1-D5 consists of 32 bits wherein the first bit indicates whether the corresponding  
20 codeword is an address codeword or a message codeword and wherein the last eleven bits are check bits and an even parity bit. In this particular embodiment, a logic "1" denotes the message codeword while a logic "0" denotes a pager address codeword (although not shown).

25 Each of message units such as A1-A6 and B1-B3 is comprised of 7 bits and represents one of the characters which are defined by ISO (International Standards Organization) 646 as shown in Fig. 3.

More specifically, the first 4 bits are used to  
30 indicate row while the remaining 3 bits define column. Further, each of the message units A1-A6 and B1-B3 indicates one of the characters positioned in the second to seven columns of the table of ISO 646.

35 The six message units S1, C1-C4 and S2 are utilized as control codes which have been inserted into a message

signal by a pager service company. In order to clearly distinguish the control codes from the other message codes, it is preferable to use some of the function codes positioned in the first and second columns of the table shown in Fig. 3. The control code S1 indicates the initiation of the set of the control codes, while C1 indicates that the next code C2 is a sign bit which indicates permission or prohibition of message reception. On the other hand, the control codes C3, C4 specify the pager ID code, while the last S2 the end of the control code set.

Fig. 4 shows a memory map wherein extraction control codes S1', C1'-C4' and S2' are arranged in the illustrated manner along with 8 pager ID codes. It should be noted that the number of pager ID codes in Fig. 4 is merely exemplary. Each of the 8 pager ID codes are preceded by a sign bit. In this instance each of the sign bits is set to prohibit messages from being displayed. In the event that the sign bit is changed to a different value (e.g. changed from "1" to "0"), the messages which is directed to the pager ID having a sign bit "0", will be displayed as in a normal or original mode. It should be noted that the position of each of sign bits is not limited to the illustrated one. It may be stored in another memory positions if the relationship with the corresponding pager ID code can be maintained.

According to the present invention, the above mentioned sign bits can be selectively rewritten to permit message reception even after all of the bits have been set in the manner illustrated in Fig. 4 (viz., all have been set to inhibit message reception).

The present invention will further be discussed with reference to Figs. 5 and 6.

Fig. 5 shows a flow chart which depicts the steps which characterize the present invention and which shows

the manner in which the received control codes are extracted and then the sign bit(s) is re-written.

As shown in Fig. 6, when the pager is switched on, the pager ID codes and the sign bits in the non-volatile memory 20 are loaded into a memory 40 of the CPU 22 (Fig. 1) via a line 72, while the extraction control codes in the memory 40 are loaded into a memory 42 (also included in the CPU 22) via a line 74. As mentioned above, when the pager is switched on, the pager ID codes in the non-volatile memory 20 are written, via a line 76, into the memory 18 in the decoder 16 in order to compare the incoming pager address code with one of the pager ID codes.

In Fig. 6, the operation identical with an operation defined by step in Fig. 5 is denoted by the same numeral.

The first step 50 of this routine is such as to receive an address code by the pager 10. Following this the first ID code is read out of the memory 18 (step 52) and compared with the received address code (step 54) in decoder 16 (Fig. 1). In step 56 it is determined if the comparison results in a match or not. In the event that the two codes do not coincide, the routine goes to step 58 wherein it is determined if all of the ID codes which are currently loaded into memory 18 have been compared or not. In the event of a negative outcome, the routine goes to step 60 wherein the next ID code is read.

In the event that none of the ID codes matches the received address code, the routine loops back to step 50 to await the next address code reception.

However, in the event that a match is made then the routine proceeds from step 56 to step 62. In this step 62, it is checked to see if the received control code S1 is detected. If the answer is negative, the message codes such as A1, A2, ... A6 are sequentially arranged in step 64. That is to say, the message codes are converted

into the corresponding characters using the table shown in Fig. 3 (step 63) and then displayed at step 66.

In the event of a positive outcome in step 62, viz., the received S1 control code is detected, the routine  
5 goes to step 68 wherein the received control codes S1, C1, C2, C3, C4 and S2 are extracted by detecting the last control code S2. Thereafter, the control codes C2, C3 and C4 are written into the corresponding memory position of the memory 40 (see Fig. 6). Following this, the sign  
10 bit denoted by the received control code C2 is written into the bit position according to the corresponding pager ID specified by the control codes C3, C4 (step 70).

After the sign bit is rewritten, the routine goes to step 64 wherein the message codes B1, B2, ... are  
15 converted into the corresponding characters and then displayed at step 66.

Fig. 7 shows a flow chart which depicts the steps which characterize the pager's operations in a normal mode wherein the message signal contains no control  
20 codes. Steps 50, 52, 54, 56, 58 and 60 of Fig. 7 are respectively identical with the Fig. 5 steps labelled with the same numerals and, accordingly the descriptions thereof will be omitted for the sake of brevity.

In Fig. 7, in the case of a positive outcome at step  
25 56, the routine goes on to step 100 wherein the message codes are successively arranged as above mentioned. Following this, at step 102, it is determined if the sign bit assigned to the coincident pager ID code has been set to inhibit message reception or not by referring to the  
30 content of the memory 40 (see Fig. 6). In the case that the sign bit in question is set to "0" and message receipt is permissible, the routine proceeds to step 106 wherein normal display is implemented and alert signals are issued.

35 However, if it is determined that the sign bit which

corresponds to the coincident ID code has been set to "1" then the routine goes to step 104 wherein the message is abandoned or disregarded and thus it is not exhibited on the display 30 without issuance of any audible signal  
5 from the speaker 24.

In the above discussion, the two control codes S1, C1 are followed by C2. However, one of S1 and C1 may be deleted if the control code extraction is assured. Further, the pager ID code is specified by two control  
10 codes C3, C4 for indicating a number of ID codes in a manner of so called multi-branching. However, it is within the scope of the present invention to delete one of C3, C4 if such a multi-branching ID code definition is not employed.

15 It will be understood that the above disclosure is representative of only one possible embodiment of the present invention and that the concept on which the invention is based is not specifically limited thereto.

CLAIMS

1. A method of enabling/disabling message receipt in a radio pager, comprising the steps of:

(a) receiving a radio transmission which is comprised of a pager address code and a message signal which follows said pager address code;

(b) comparing the pager address code with a predetermined pager ID code;

(c) acquiring the message signal in the event that the pager address code coincides with the pager ID code;

(d) checking if control information is present within said message signal;

(e) extracting said control information from said message signal in the event of a positive outcome in step (d); and

(f) rewriting a piece of message receive control data which determines if the message signal is displayed or disregarded, in the event that the control code is found in the message signal.

2. A method of rewriting message receive control information which has been stored in a radio pager, each piece of said message receive control information being assigned to one of plural pager ID codes previously allocated to said radio pager and indicating if a message directed to the corresponding pager ID code is acceptable, said method comprising the steps of:

(a) receiving, at said radio pager, a pager address code which is followed by a message signal;

(b) comparing the pager address code with each of said pager ID codes;

(c) acquiring the message signal in the event that the pager address code coincides with one of said pager ID codes;

This Sheet Has Been Replaced



(d) checking if control codes are present within said message signal, said control codes including message receive control data by which said one of pieces of message receive control information is rewritten; and

(e) rewriting one of pieces of the message information by the message receive control data transmitted in the event that the control codes are found to be present within said message signal in step (d).

3. A method as claimed in claim 2, wherein when the control codes are detected in the message signal in step (e), a subscriber of said radio pager is informed of the content of the message signal.

4. A method as claimed in claim 2, wherein when said radio pager is powered on, said pager ID codes are read out from a non-volatile memory into storage means provided in a decoder at which the comparison in step (b) is implemented.

5. A method as claimed in claim 2, wherein when said radio pager is switched on, control code detecting codes are read out from a non-volatile memory into a controller and used to search for the detection of the control codes included in said message signal.

---

This Sheet Has Been Replaced



ABSTRACT

METHOD OF REWRITING MESSAGE RECEIVE CONTROL  
INFORMATION STORED IN RADIO PAGER


In order to enable/disable message receipt in a radio pager, a radio transmission is received which is comprised of a pager address code and a message signal which includes a set of control codes. Following this, the pager address code is compared with a predetermined pager ID code. In the event that the pager address code coincides with the pager ID code, the message signal is acquired. Subsequently, it is checked to see if the control code set is present within the message signal. In the event of a positive outcome in the above mentioned checking, the control code set is extracted from the message signal. Then, a piece of message receive control data stored in the pager is rewritten which determines if the message signal is displayed or disregarded.

---


This Sheet Has Been Replaced



**FIG. 1**

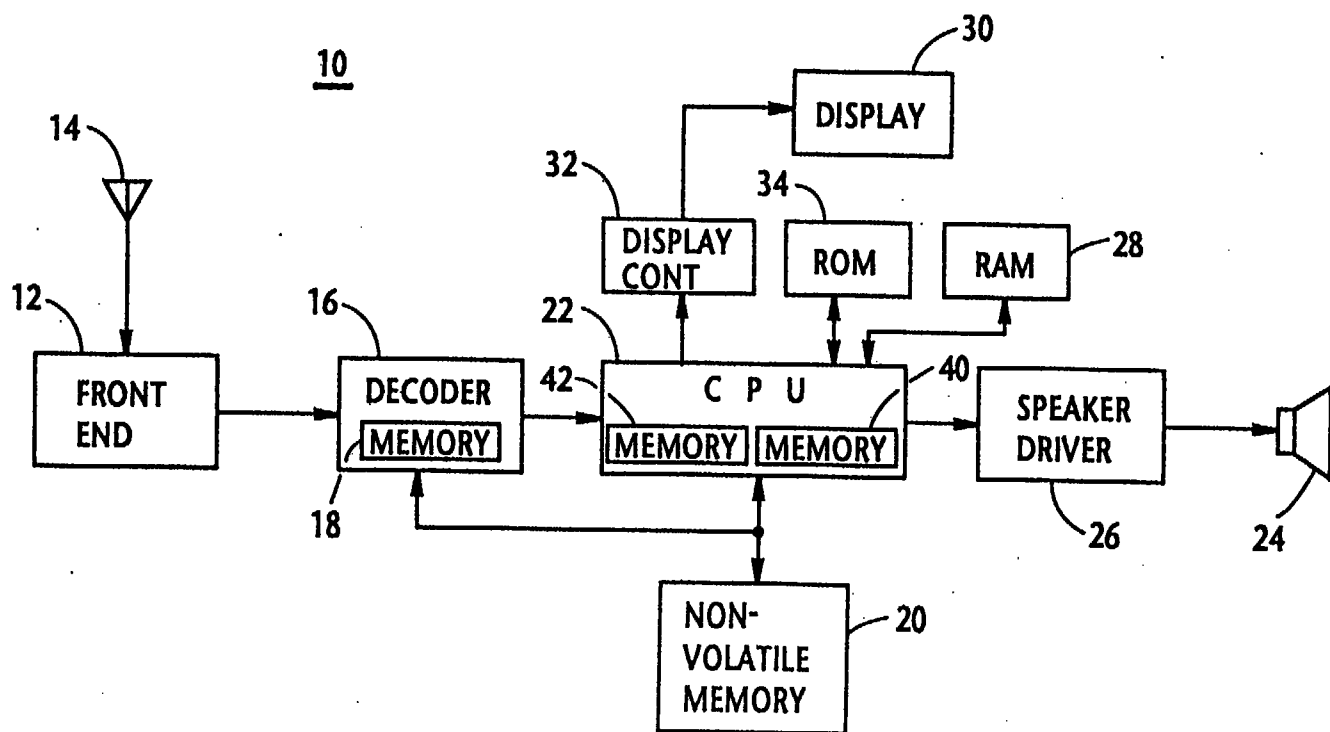

**FIG. 2**

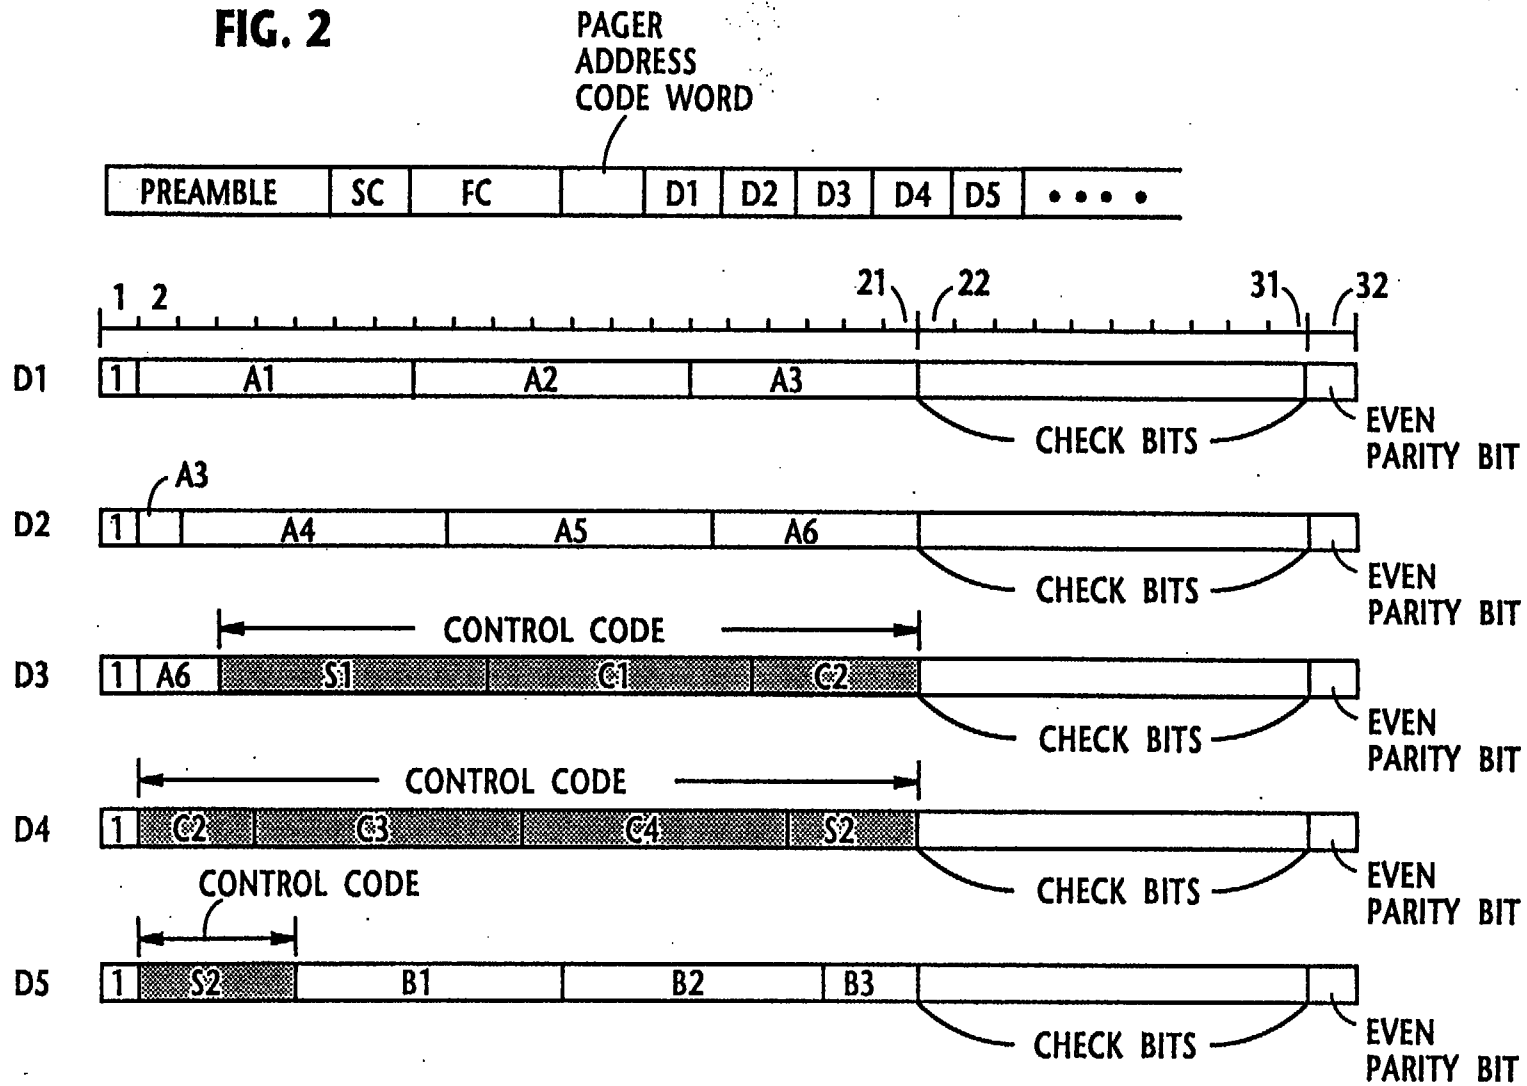

| BIT NO. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Column Row |         |         |        |   |   |   |   |     |
|---------|---|---|---|---|---|---|---|------------|---------|---------|--------|---|---|---|---|-----|
|         |   |   |   |   |   |   |   |            | 0       | 1       | 2      | 3 | 4 | 5 | 6 | 7   |
|         |   |   |   | 0 | 0 | 0 | 0 | 0          | NUL     | TC(DLE) | SP     | 0 |   | P |   | p   |
|         |   |   |   | 0 | 0 | 0 | 1 | 1          | TC(SOH) | DC      | !      | 1 | A | Q | a | q   |
|         |   |   |   | 0 | 0 | 1 | 0 | 2          | TC(STX) | DC      | "      | 2 | B | R | b | r   |
|         |   |   |   | 0 | 0 | 1 | 1 | 3          | TC(ETX) | DC      | £(#)   | 3 | C | S | c | s   |
|         |   |   |   | 0 | 1 | 0 | 0 | 4          | TC(EOT) | DC      | \$ (□) | 4 | D | T | d | t   |
|         |   |   |   | 0 | 1 | 0 | 1 | 5          | TC(ENQ) | TC(NAK) | %      | 5 | E | U | e | u   |
|         |   |   |   | 0 | 1 | 1 | 0 | 6          | TC(ACK) | TC(SYN) | &      | 6 | F | V | f | v   |
|         |   |   |   | 0 | 1 | 1 | 1 | 7          | BEL     | TC(ETB) | .      | 7 | G | W | g | w   |
|         |   |   |   | 1 | 0 | 0 | 0 | 8          | FE(BS)  | CAN     | (      | 8 | H | X | h | x   |
|         |   |   |   | 1 | 0 | 0 | 1 | 9          | FE(HT)  | EM      | )      | 9 | I | Y | i | y   |
|         |   |   |   | 1 | 0 | 1 | 0 | 10         | FE(LF)  | SUB     | *      | : | J | Z | j | z   |
|         |   |   |   | 1 | 0 | 1 | 1 | 11         | FE(VT)  | ESC     | +      | ; | K | [ | k | {   |
|         |   |   |   | 1 | 1 | 0 | 0 | 12         | FE(FF)  | IS(FS)  | '      |   | L | \ | l |     |
|         |   |   |   | 1 | 1 | 0 | 1 | 13         | FE(CR)  | IS(GS)  | -      | = | M | ] | m | }   |
|         |   |   |   | 1 | 1 | 1 | 0 | 14         | SO      | IS(RS)  | .      |   | N | . | n | .   |
|         |   |   |   | 1 | 1 | 1 | 1 | 15         | SI      | IS(US)  | /      | ? | O | . | o | DEL |

FIG. 3

This Sheet Has Been Replaced  


**FIG. 4**



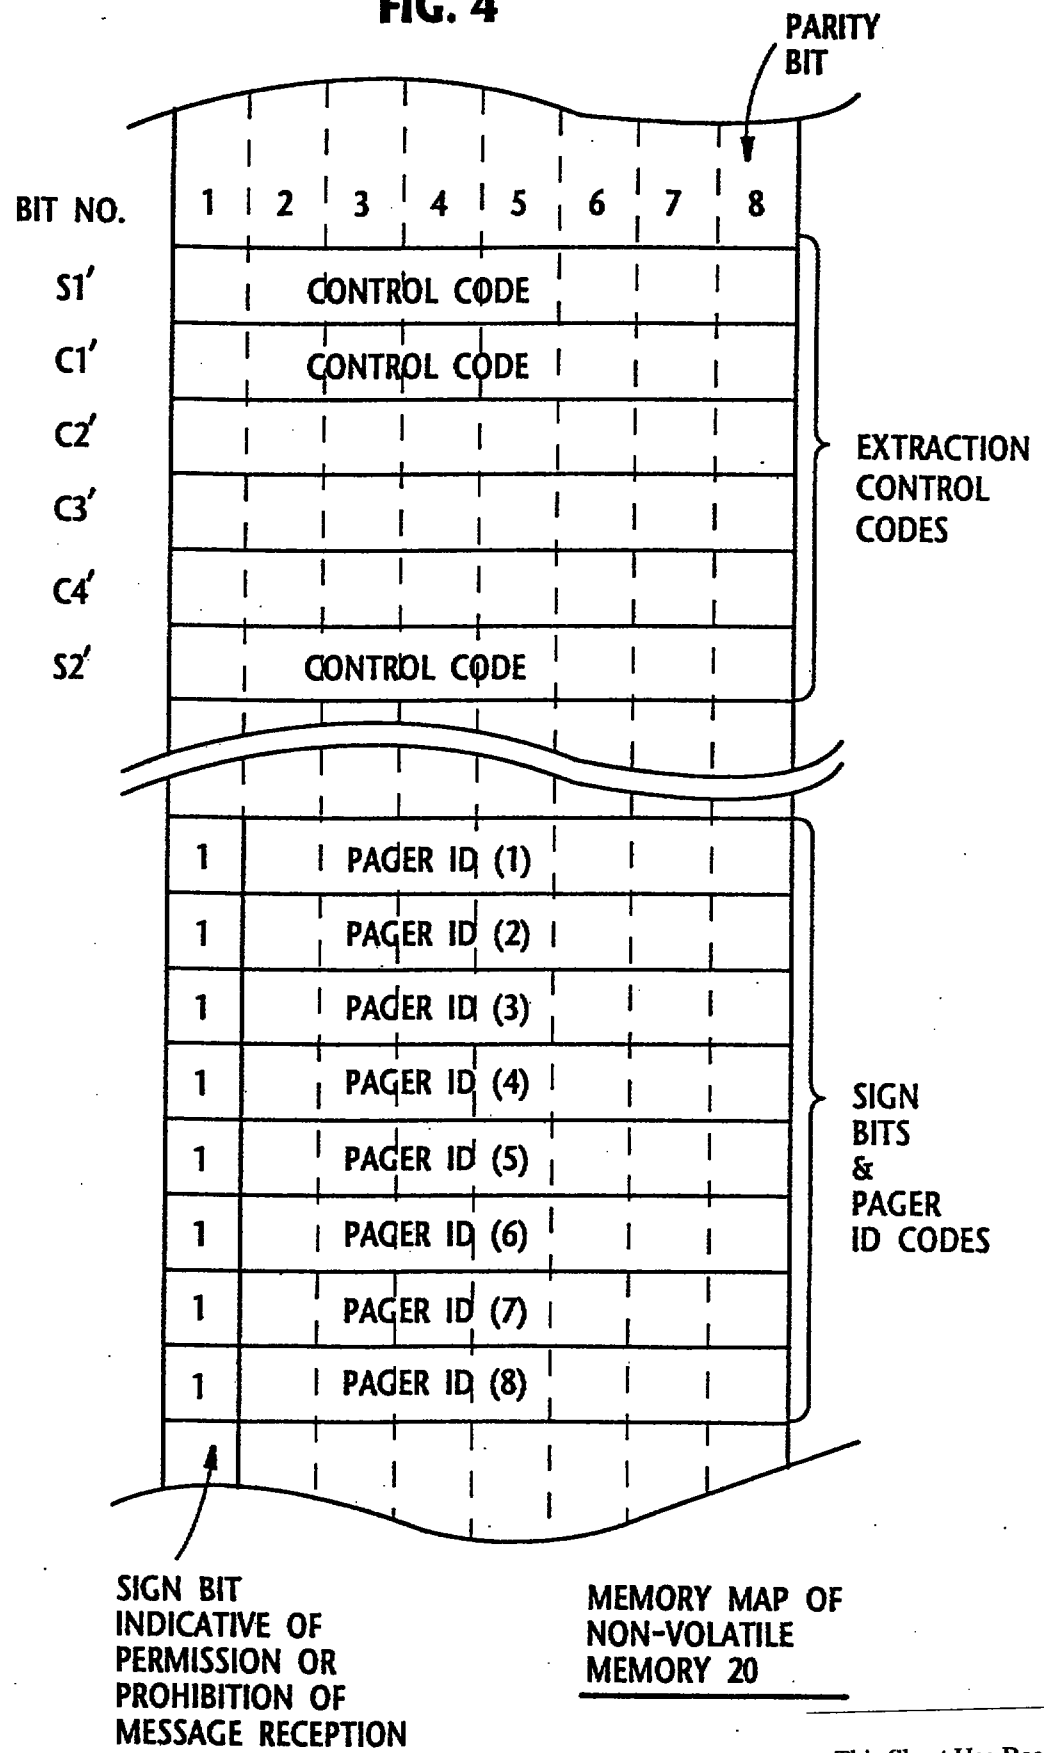



FIG. 5

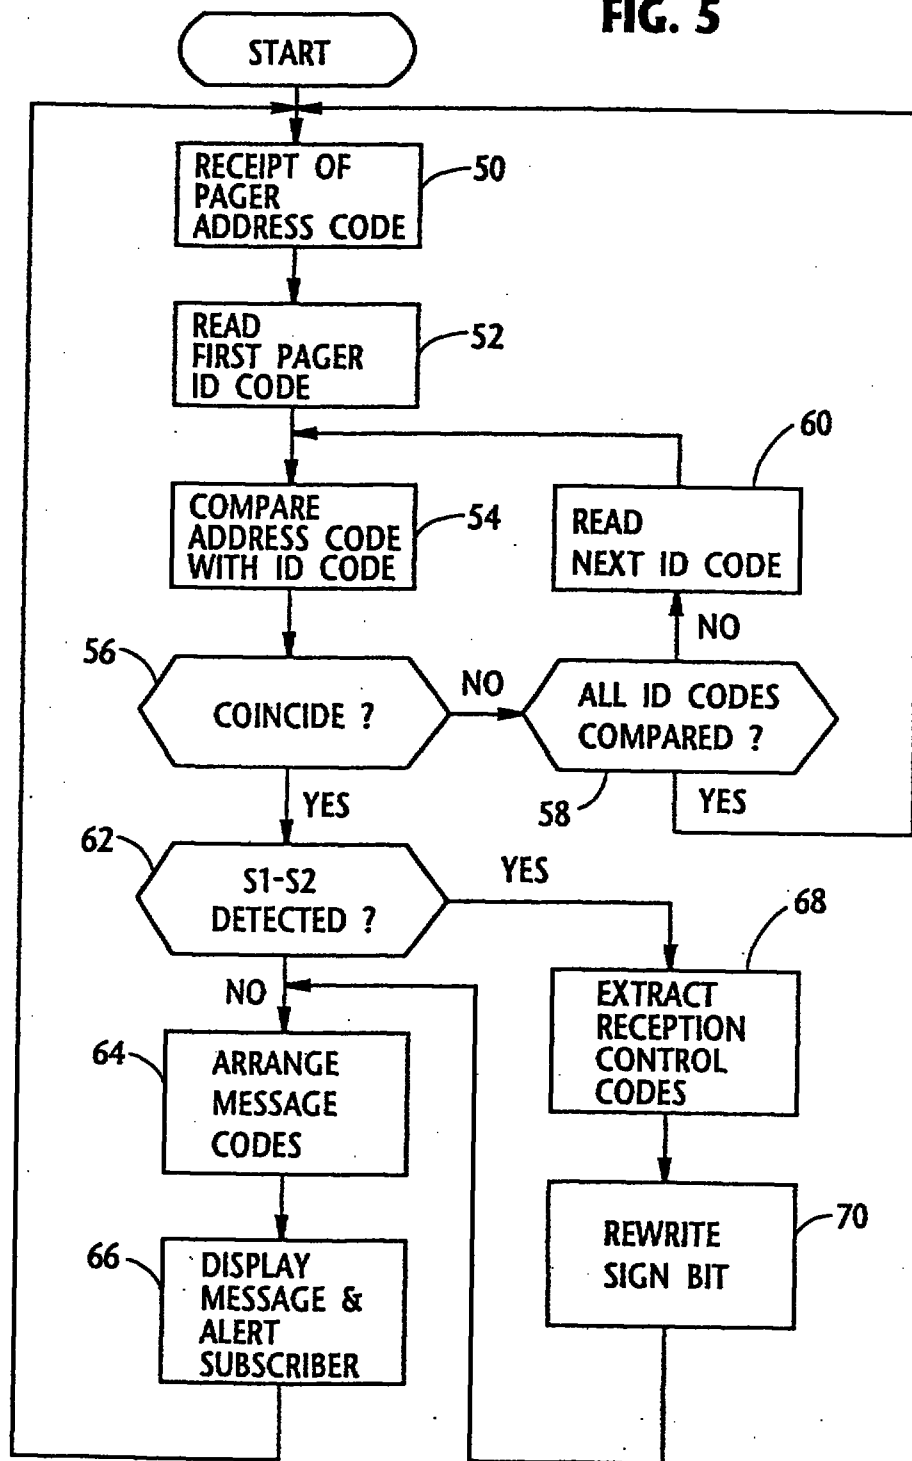

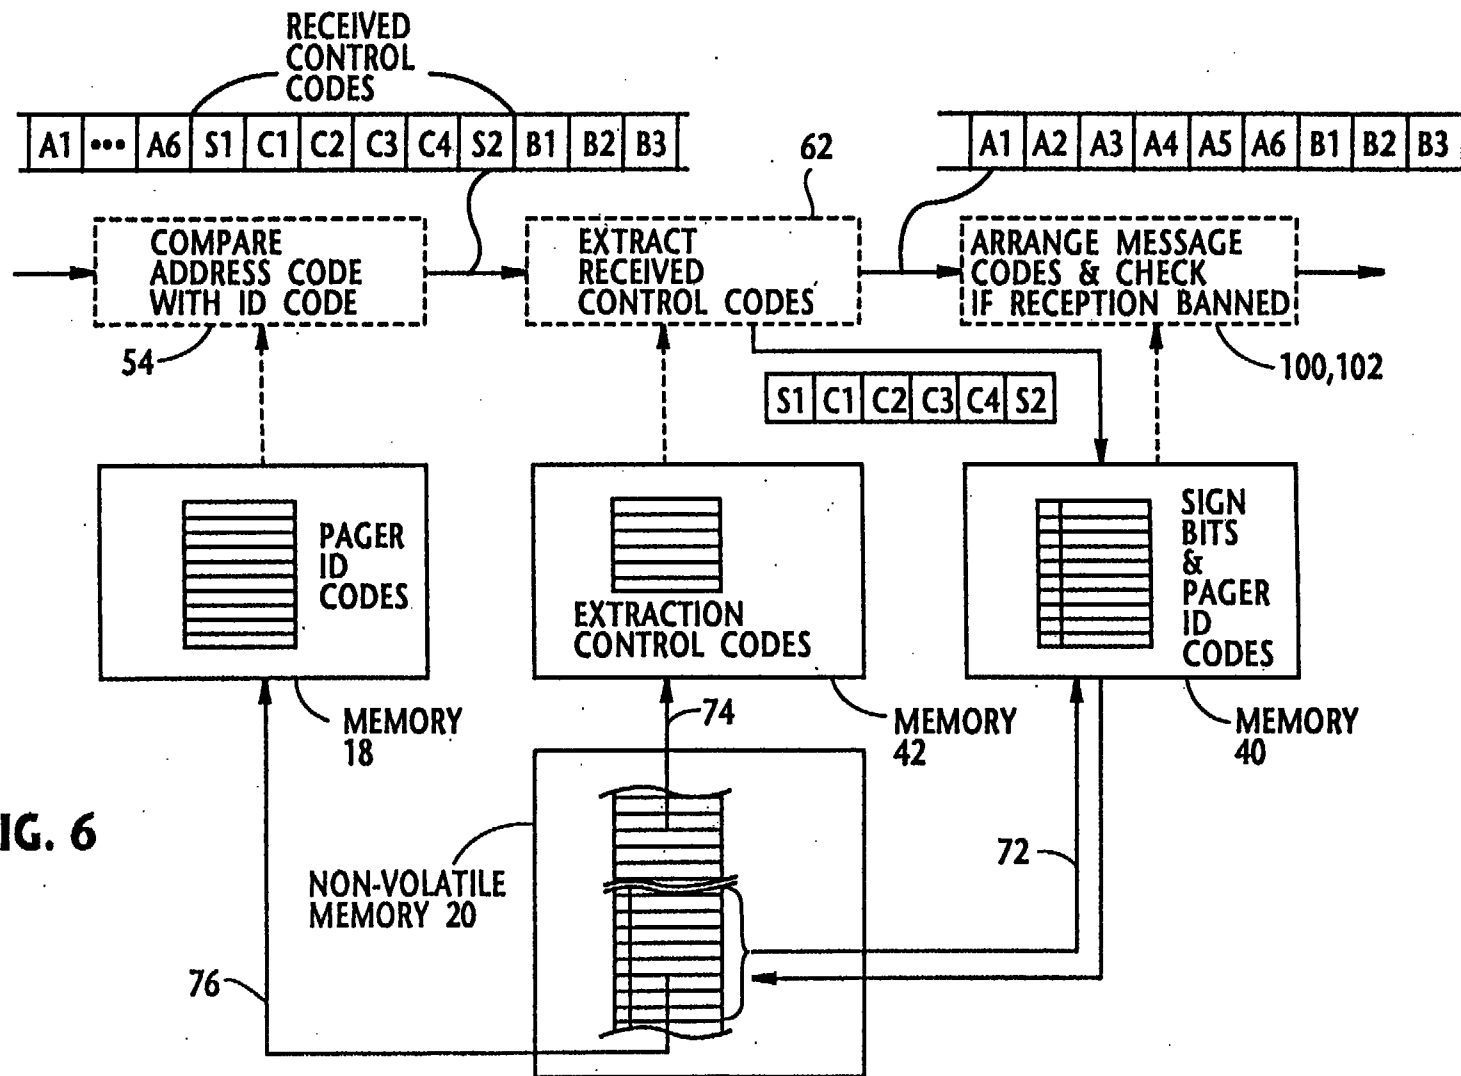

**FIG. 6**

FIG. 7

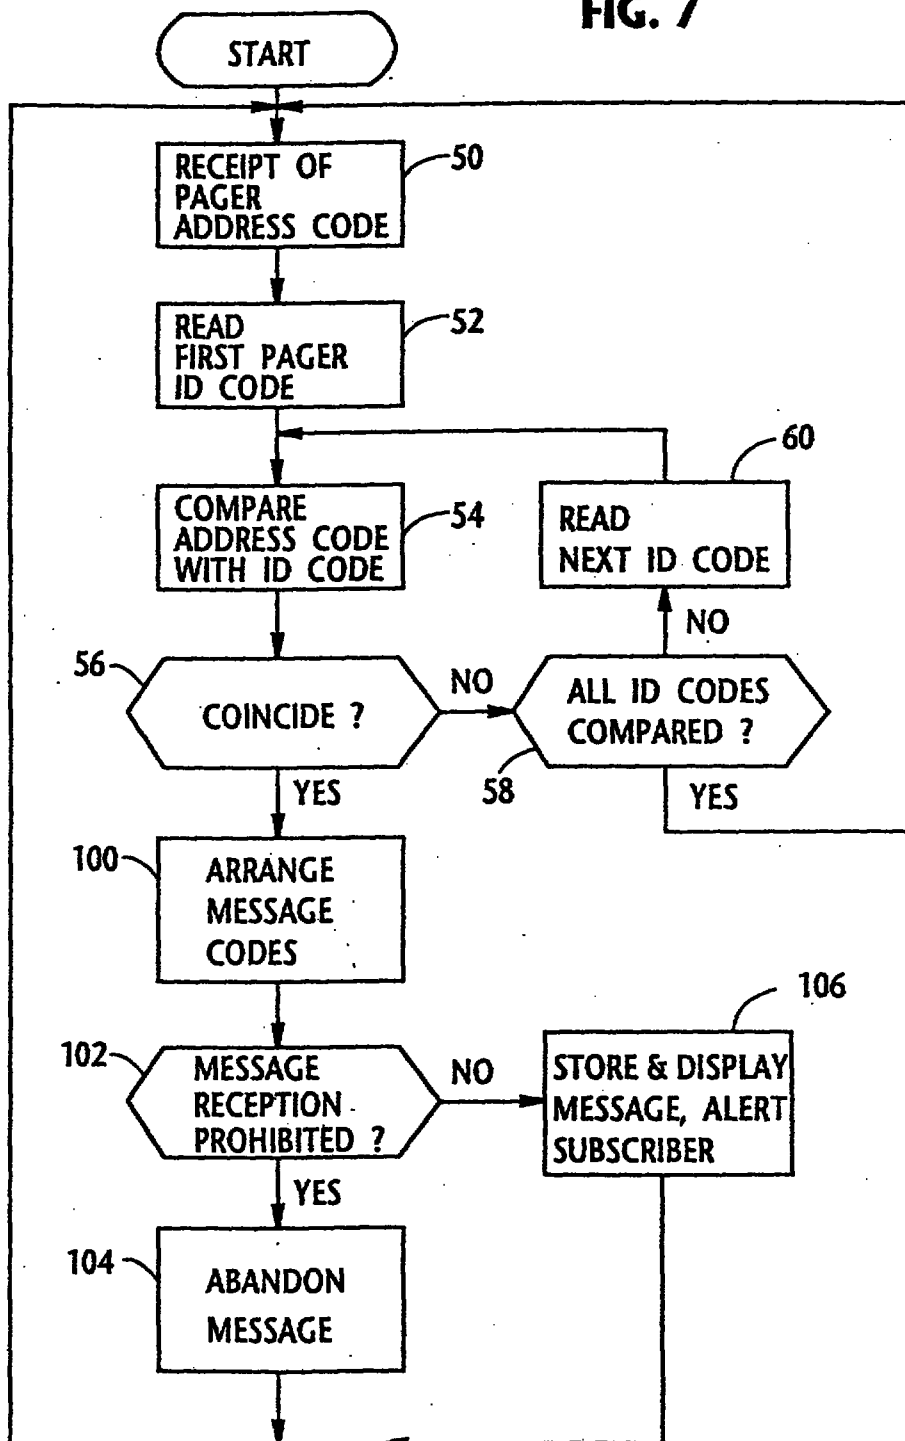

METHOD OF REWRITING MESSAGE RECEIVE CONTROL INFORMATION  
STORED IN RADIO PAGER

ABSTRACT

In order to enable/disable message receipt in a radio pager, a radio transmission is received which is comprised of a pager address code and a message signal which includes a set of control codes (42). Following this, the pager address code is compared (54) with a predetermined pager ID code (18). In the event that the pager address code coincides with the pager ID code, the message signal is acquired. Subsequently, it is checked to see if the control code (42) set is present within the message signal. In the event of a positive outcome in the above mentioned checking, the control code set is extracted from the message signal. Then, a piece of message receive control data stored in the pager is rewritten which determines if the message signal is displayed or disregarded.

Fig. 6

This is the replacement sheet

Date: 24/10/96


| REPLACEMENT SHEETS                  |                                          | SG          |
|-------------------------------------|------------------------------------------|-------------|
| <input type="checkbox"/>            | Description : paged ..... to paged ..... |             |
| <input type="checkbox"/>            | Claim(s) : paged ..... to paged .....    |             |
| <input type="checkbox"/>            | Drawing(s) : paged ..... to paged .....  |             |
| <input checked="" type="checkbox"/> | Abstract : paged ..... to paged .....    |             |
| DATE OF RECEIPT                     |                                          | 24 OCT 1996 |

☐ Description : paged ..... to paged .....  
☐ Claim(s) : paged ..... to paged .....  
☒ Drawing(s) : paged ..... to paged .....  
☐ Abstract : paged ..... to paged .....

DATE OF RECEIPT 24 OCT 1996

1/7


FIG. 1

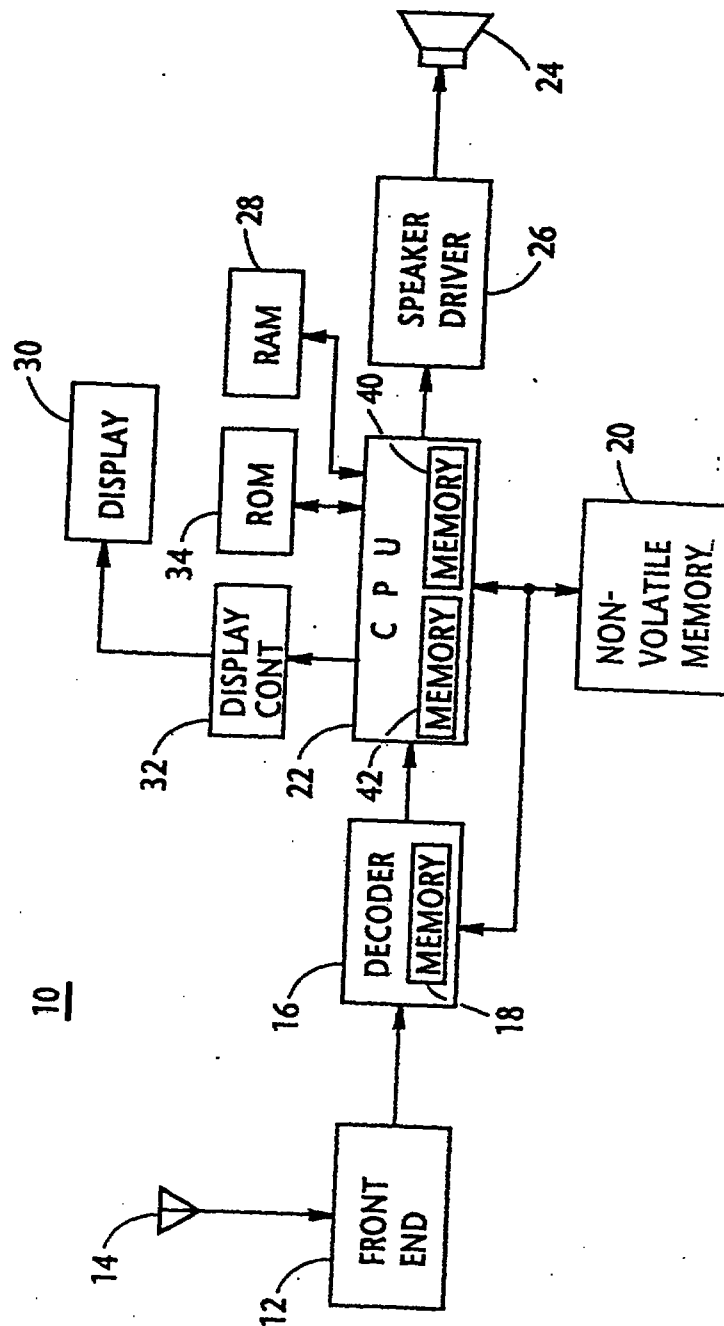

This is the replacement sheet

Date: 24/10/96

**FIG. 2**

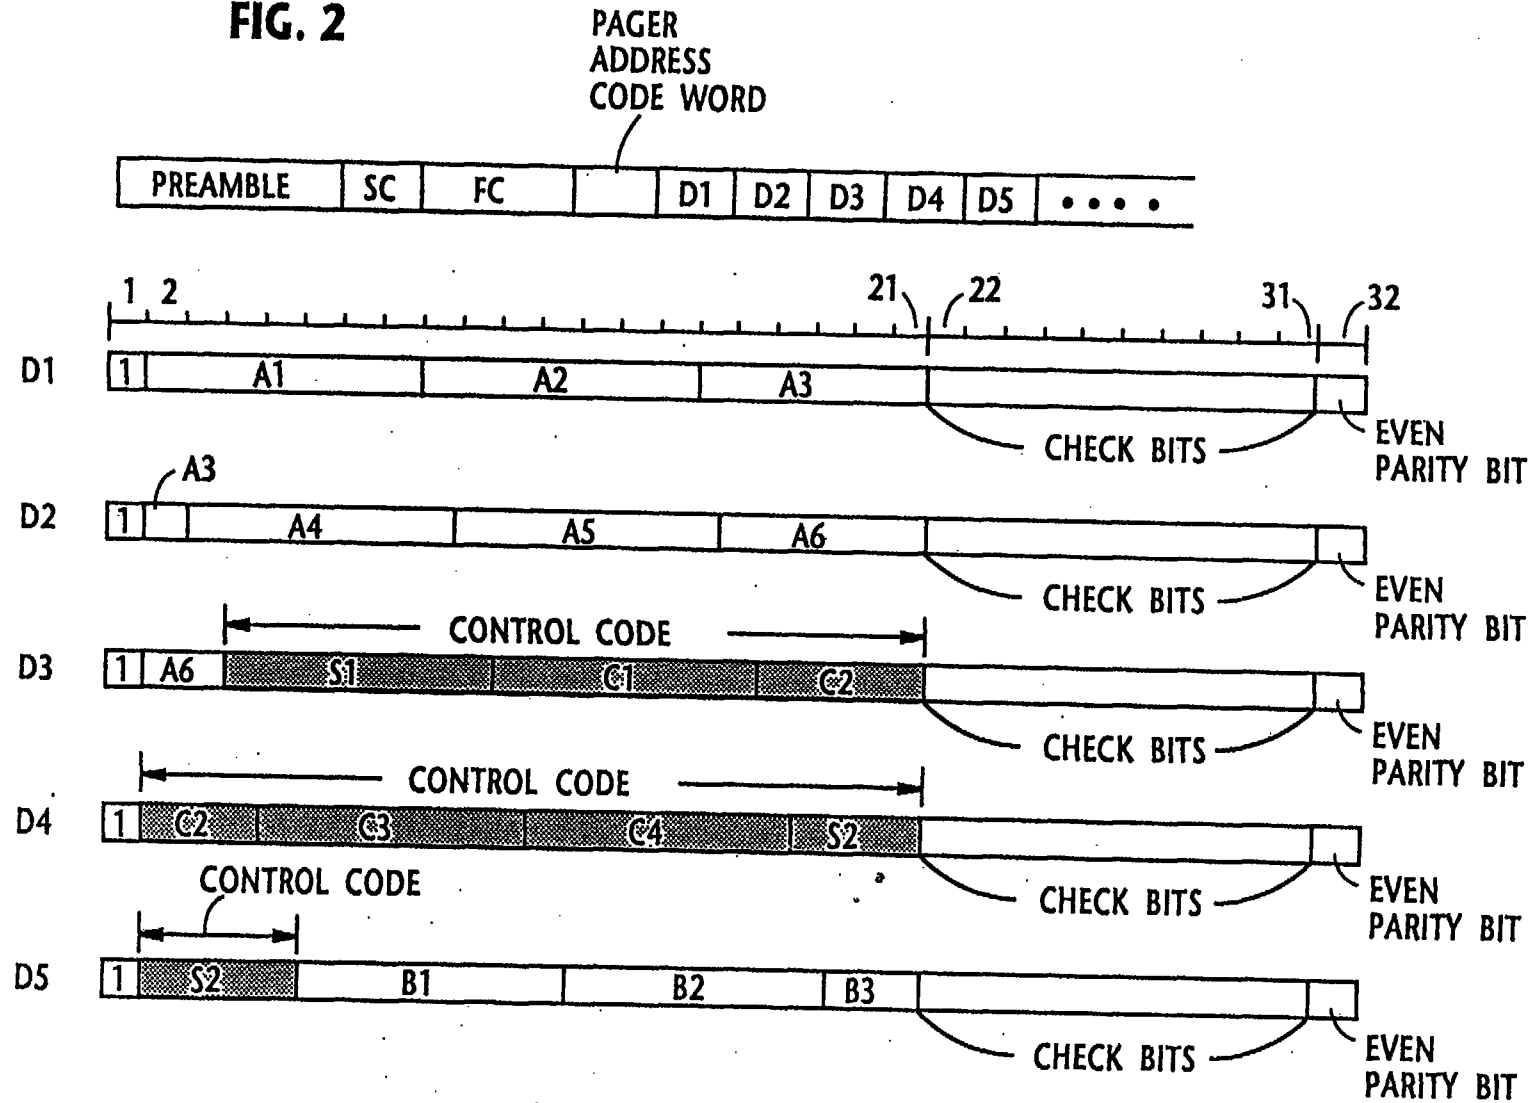

2/7

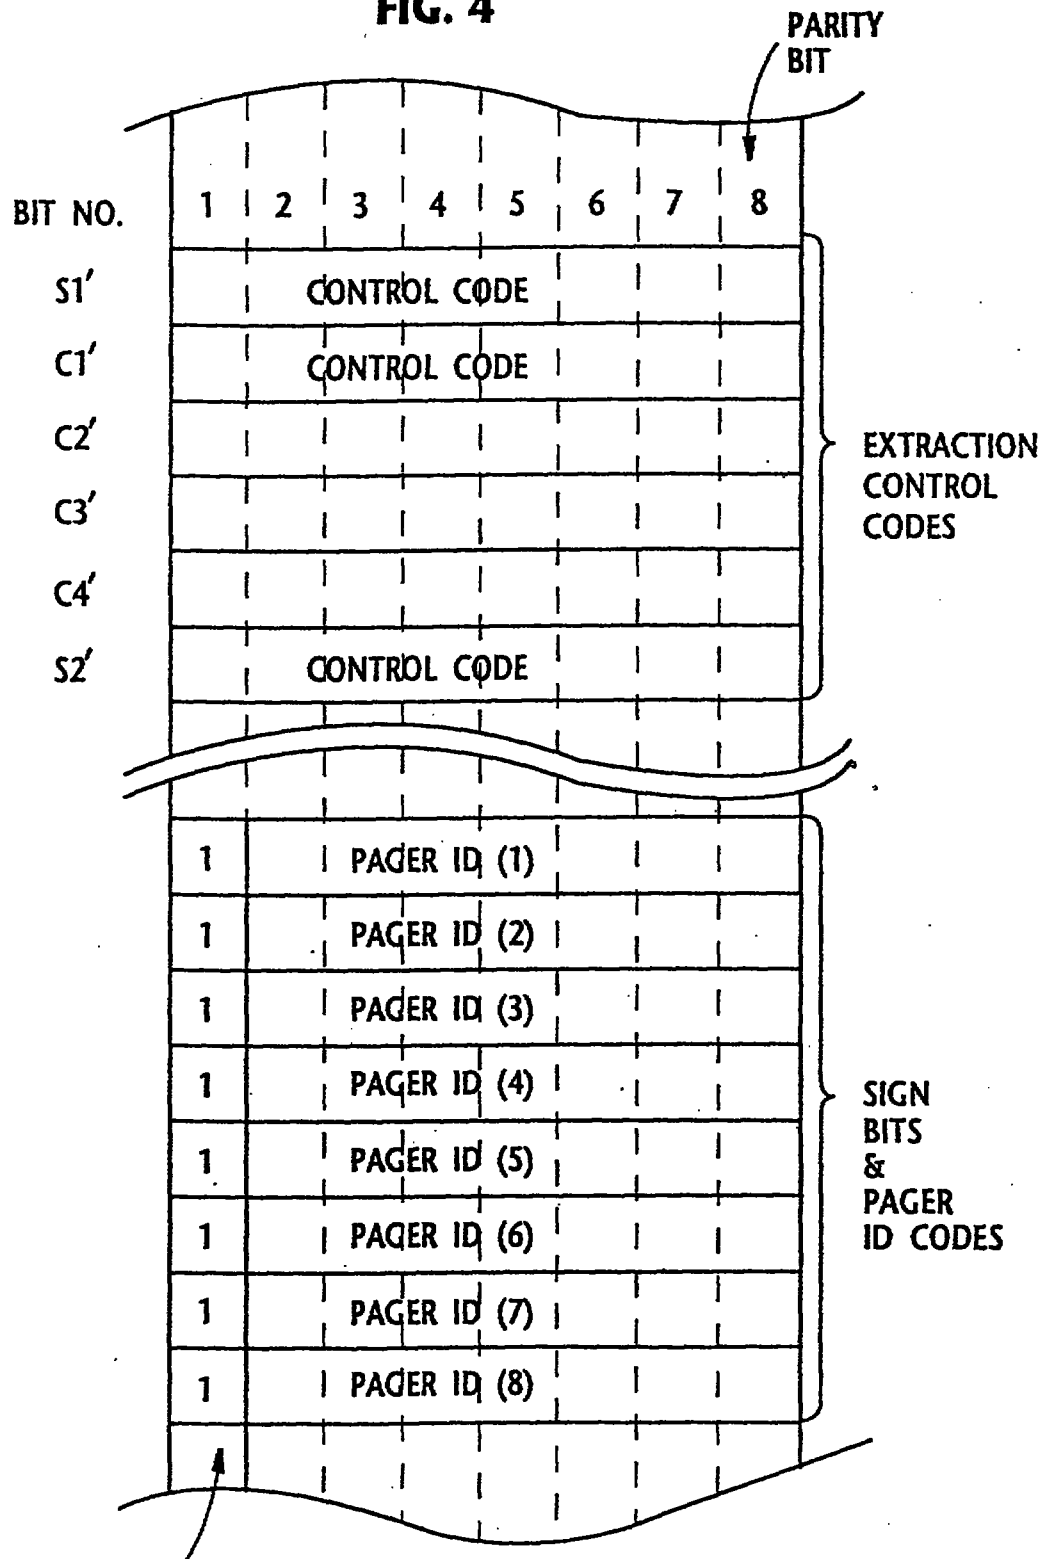
| BIT NO. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Column Row | 0       | 1       | 2    | 3 | 4 | 5 | 6 | 7   |
|---------|---|---|---|---|---|---|---|------------|---------|---------|------|---|---|---|---|-----|
|         |   |   |   |   |   |   |   |            | 0       | 1       | 2    | 3 | 4 | 5 | 6 | 7   |
|         |   |   |   |   |   |   |   | 0          | NUL     | TC(DLE) | SP   | 0 |   | P |   | p   |
|         |   |   |   |   |   |   |   | 1          | TC(SOH) | DC      | !    | 1 | A | Q | a | q   |
|         |   |   |   |   |   |   |   | 2          | TC(STX) | DC      | "    | 2 | B | R | b | r   |
|         |   |   |   |   |   |   |   | 3          | TC(ETX) | DC      | £(#) | 3 | C | S | c | s   |
|         |   |   |   |   |   |   |   | 4          | TC(EOT) | DC      | \$□  | 4 | D | T | d | t   |
|         |   |   |   |   |   |   |   | 5          | TC(ENQ) | TC(NAK) | %    | 5 | E | U | e | u   |
|         |   |   |   |   |   |   |   | 6          | TC(ACK) | TC(SYN) | &    | 6 | F | V | f | v   |
|         |   |   |   |   |   |   |   | 7          | BEL     | TC(ETB) | .    | 7 | G | W | g | w   |
|         |   |   |   |   |   |   |   | 8          | FE(BS)  | CAN     | (    | 8 | H | X | h | x   |
|         |   |   |   |   |   |   |   | 9          | FE(HT)  | EM      | )    | 9 | I | Y | i | y   |
|         |   |   |   |   |   |   |   | 10         | FE(LF)  | SUB     | *    | : | J | Z | j | z   |
|         |   |   |   |   |   |   |   | 11         | FE(VT)  | ESC     | +    | ; | K | [ | k | {   |
|         |   |   |   |   |   |   |   | 12         | FE(FF)  | IS(FS)  | '    |   | L | \ | l |     |
|         |   |   |   |   |   |   |   | 13         | FE(CR)  | IS(GS)  | -    | = | M | ] | m | }   |
|         |   |   |   |   |   |   |   | 14         | SO      | IS(RS)  | -    |   | N | . | n | .   |
|         |   |   |   |   |   |   |   | 15         | SI      | IS(US)  | /    | ? | O | . | o | DEL |

FIG. 3

3/7

This is the replacement sheet

Date: 24/10/96

**FIG. 4**


SIGN BIT  
INDICATIVE OF  
PERMISSION OR  
PROHIBITION OF  
MESSAGE RECEPTION

MEMORY MAP OF  
NON-VOLATILE  
MEMORY 20

This is the replacement sheet

Date: 24/10/96

FIG. 5

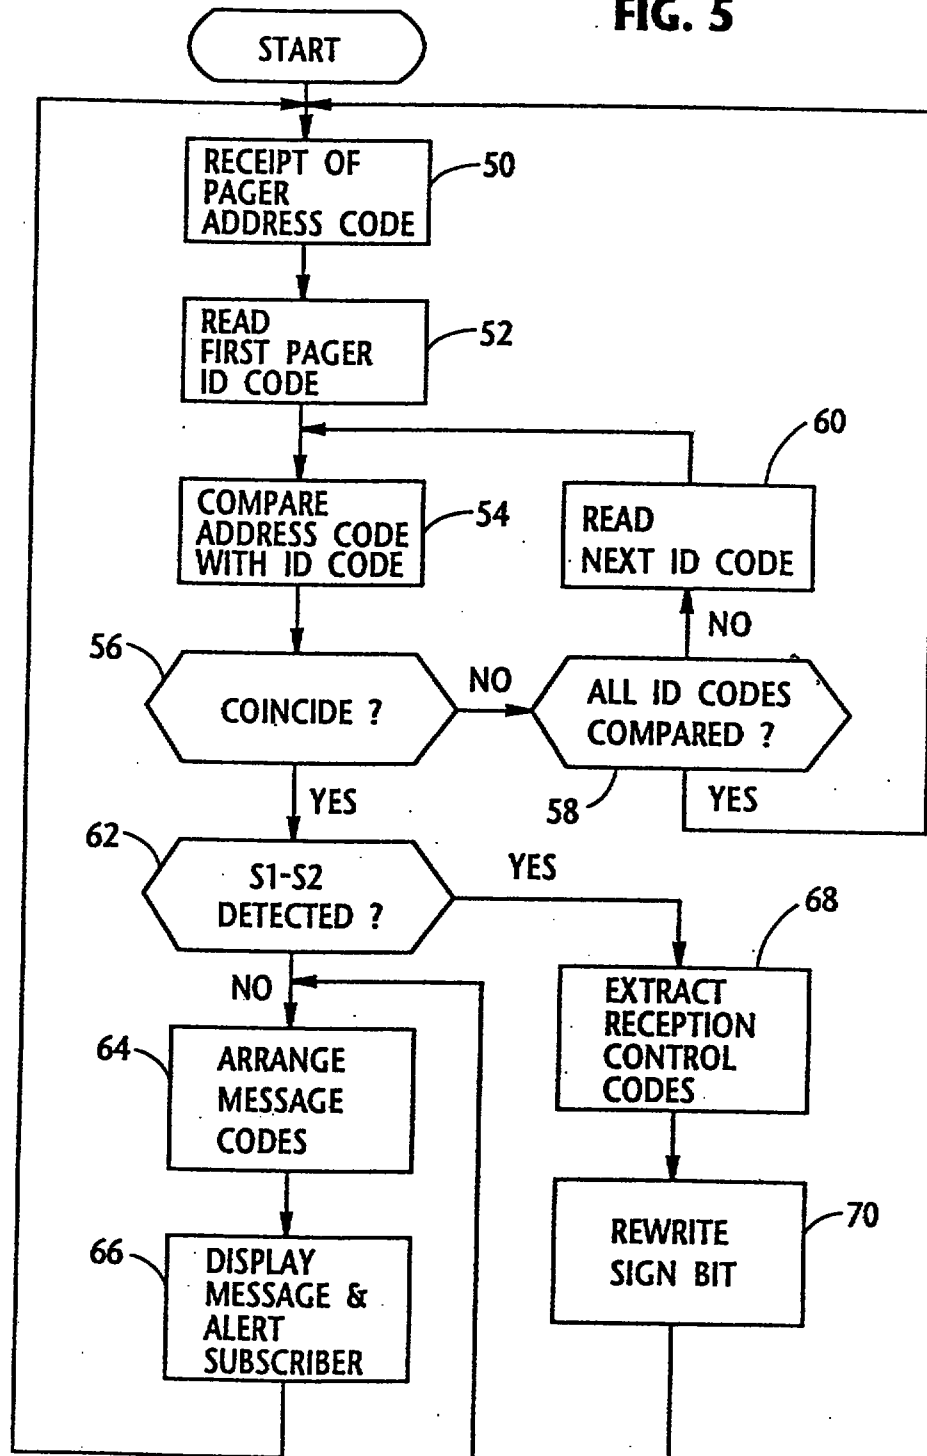

This is the replacement sheet

Date: 24/10/96


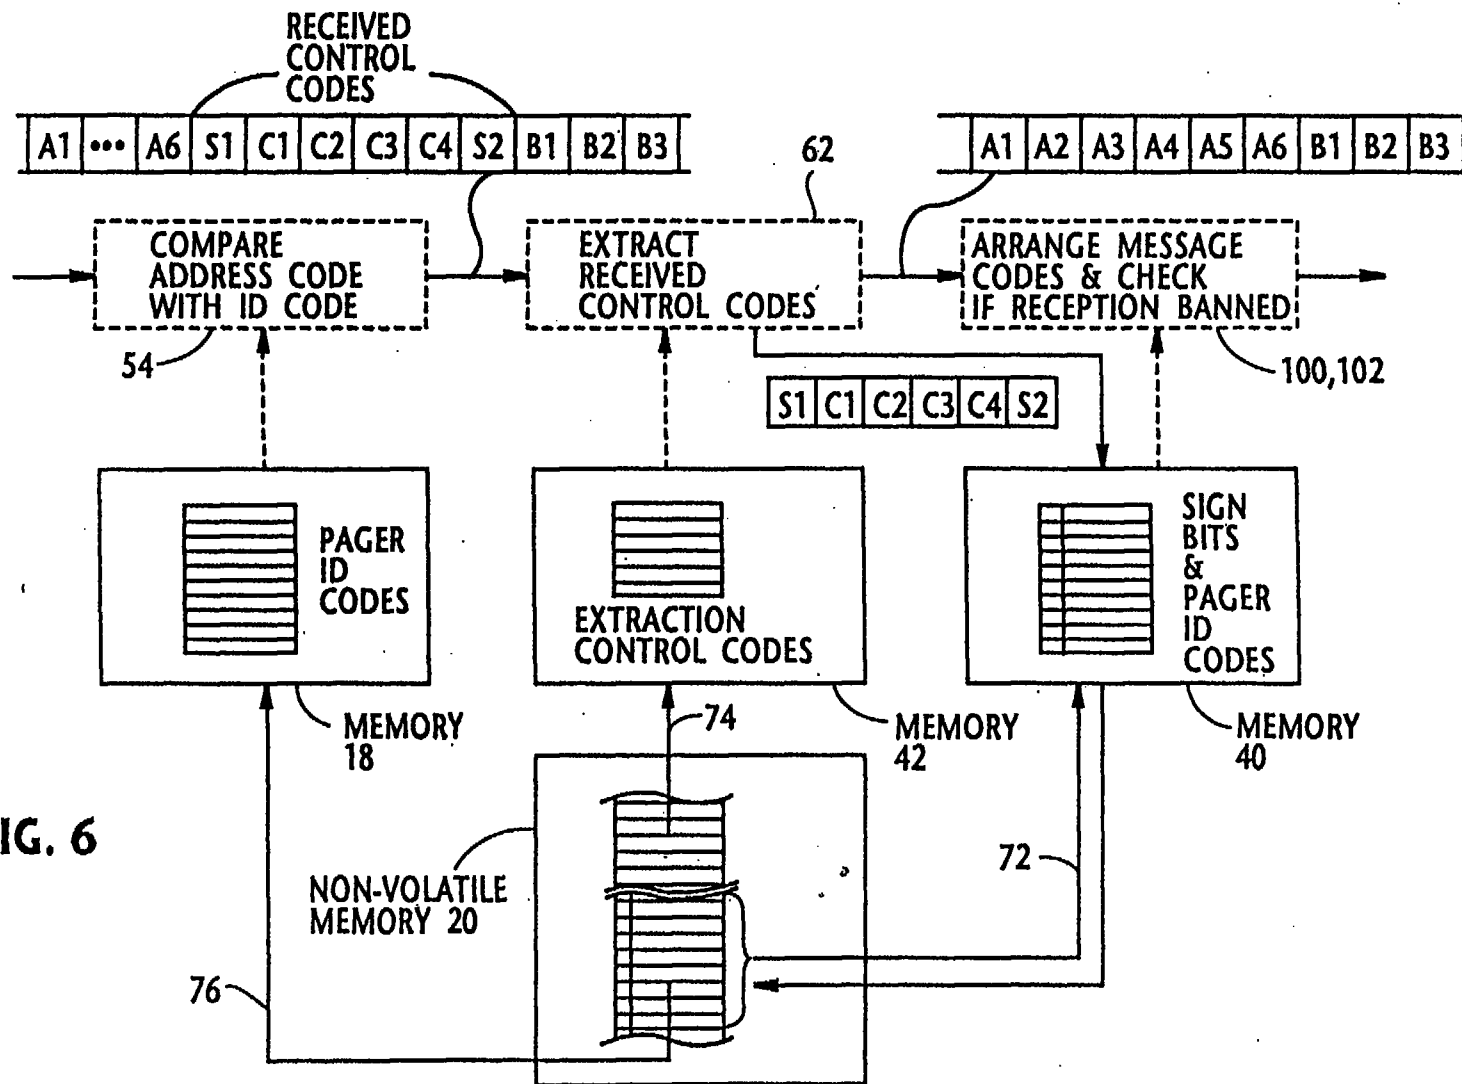


FIG. 6

FIG. 7

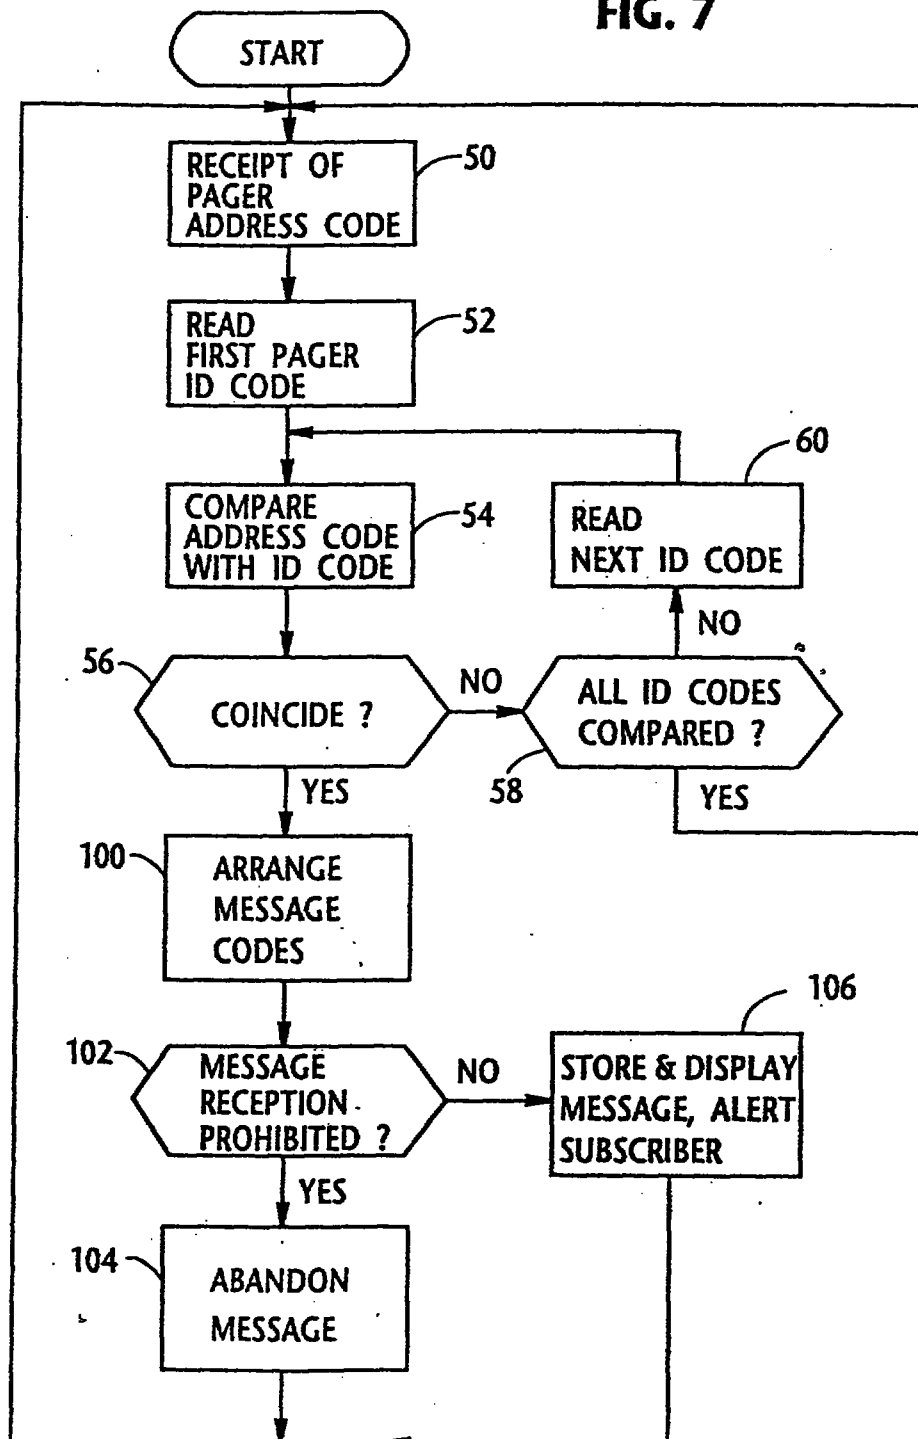

This is the replacement sheet

Date: 24/10/96

6-208222K

inoperative, the pager per se must be returned to the pager service company for PROM (Programmable Read Only Memory) rewriting. This is awkward and a waste of time for both the subscriber and the service company.

### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method which is able to return a radio pager to a normal use in the event that the pager assumes a condition wherein all the pager ID codes assigned thereto are rendered inoperative.

Therefore, the invention discloses a method of rewriting message receive control information which has been stored in a radio pager, a plurality of pieces of said message receive control information being respectively assigned to a plurality of pager ID codes previously allocated to said radio pager and indicating if a message directed to the corresponding pager ID code is acceptable, said method comprising the steps of:

- (a) receiving, at said radio pager, a pager address code which is followed by message information;
- (b) comparing the pager address code with each of said pager ID codes even if all of said pager ID codes are inoperative;
- (c) entering into a message transmission waiting state if the pager address code does not coincide with any of said pager ID codes;
- (d) checking to determine if control codes are present within said message information if the pager address code coincides with one of said pager ID codes; and
- (e) rewriting one piece of said plurality of pieces of the message receive control information by using said control codes.

|                                     |             |                        |
|-------------------------------------|-------------|------------------------|
| REPLACEMENT SHEETS                  |             | SG                     |
| <input checked="" type="checkbox"/> | Description | : paged 3 to paged 4   |
| <input checked="" type="checkbox"/> | Claim(s)    | : paged 11 to paged 12 |
| <input type="checkbox"/>            | Drawing(s)  | : paged 1 to paged 1   |
| <input type="checkbox"/>            | Abstract    | : paged 1 to paged 1   |
| DATE OF RECEIPT                     |             | 22 APR 1997            |

This is the replacement sheet

Date: 22/4/97

#### BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will become more clearly appreciated from the following description taken in conjunction with the accompanying drawings in which like elements are denoted by like reference numerals and in which:

Fig. 1 is a block diagram which schematically illustrates a pager of the nature to which the present invention is applicable;

Fig. 2 is a chart depicting formats of the signals which are applied to the radio pager;

Fig. 3 is a chart which depicts function codes and characters which are defined by ISO 646 and are used in the embodiment of the present invention;

Fig. 4 depicts a memory map which indicates the allocation of contents stored in a non-volatile memory of the pager illustrated in Fig. 1:

Fig. 5 is a flow chart which characterize the operations of the embodiment of the present invention;

Fig. 6 is a sketch for describing the embodiment of the present invention; and

Fig. 6 is a flow chart which depicts the operations which occur during normal pager usage in accordance with

This is the replacement sheet

Date: 22/4/97

CLAIMS

1. A method of rewriting message receive control information which has been stored in a radio pager, a plurality of pieces of said message receive control information being respectively assigned to a plurality of pager ID codes previously allocated to said radio pager and indicating if a message directed to the corresponding pager ID code is acceptable, said method comprising the steps of:

- (a) receiving, at said radio pager, a pager address code which is followed by message information;
- (b) comparing the pager address code with each of said pager ID codes even if all of said pager ID codes are inoperative;
- (c) entering into a message transmission waiting state if the pager address code does not coincide with any of said pager ID codes;
- (d) checking to determine if control codes are present within said message information if the pager address code coincides with one of said pager ID codes; and
- (e) rewriting one piece of said plurality of pieces of the message receive control information by using said control codes.

2. A method as claimed in claim 1, further comprising the step whereby when the control codes are detected in the message information in step (d), a subscriber of said radio pager is informed of the content of the message information.

3. A method as claimed in claim 1, further comprising the step whereby when said radio pager is powered on, said pager ID codes are read out from a non-volatile memory into storage means provided in a decoder at which the comparison in step (b) is implemented.

4. A method as claimed in claim 1, further comprising the step whereby when said radio pager is switched on, control code detecting codes are read out from a non-volatile memory into a controller and used to search for the detection of the control codes included in said message information.

This is the replacement sheet

Date: 22/4/97



5. A method of rewriting message receive control information which has been stored in a radio pager substantially as herein described and as shown in the accompanying drawings.

This is the replacement sheet

Date: 22/4/97

