



- (51) **International Patent Classification:**
Not classified
- (21) **International Application Number:**
PCT/US2019/039574
- (22) **International Filing Date:**
27 June 2019 (27.06.2019)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/712,914 31 July 2018 (31.07.2018) US
16/452,471 25 June 2019 (25.06.2019) US
- (71) **Applicant: QUALCOMM INCORPORATED** [US/US];
ATTEN: International IP Administration, 5775 Morehouse
Drive, San Diego, California, US 92121-1714 (US).
- (72) **Inventors: HE, Linhai**; QUALCOMM INCORPORAT-
ED, 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **HORN, Gavin Bernard**; QUALCOMM
- INCORPORATED, 5775 Morehouse Drive, San Diego,
California 92121-1714 (US).
- (74) **Agent: HODGES, Jonas J.** et al.; c/o ARENT FOX LLP,
1717 K Street NW, Washington, District of Columbia
20006-5344 (US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) **Title: DRX GROUPS FOR CARRIER AGGREGATION**

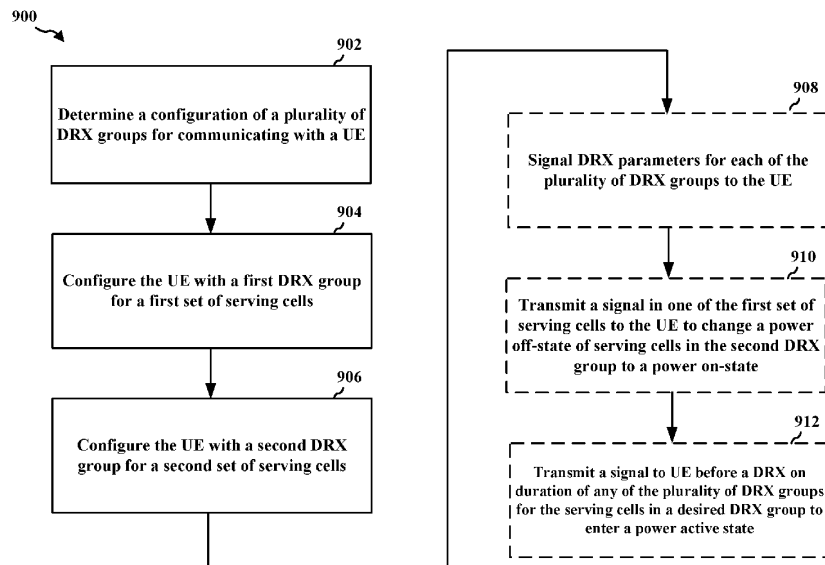


FIG. 9

(57) **Abstract:** Aspects presented herein provide an enhanced power management solution, such that an apparatus may configure a UE with more than one DRX configuration for different cells. The apparatus determines a configuration of a plurality of discontinuous reception (DRX) groups for communicating with a UE. The apparatus configures the UE with a first DRX group for a first set of serving cells. The apparatus configures the UE with a second DRX group for a second set of serving cells.

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*