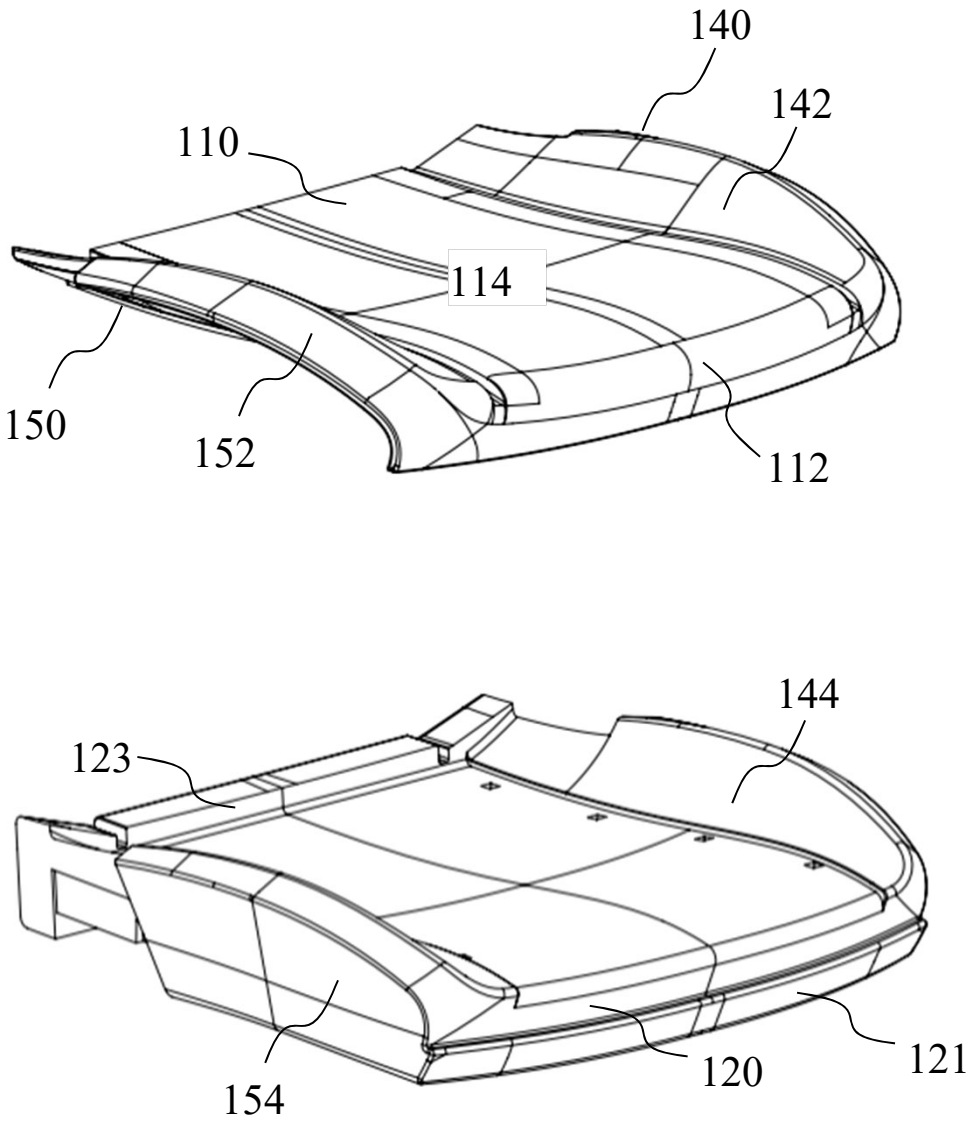


FIG. 1

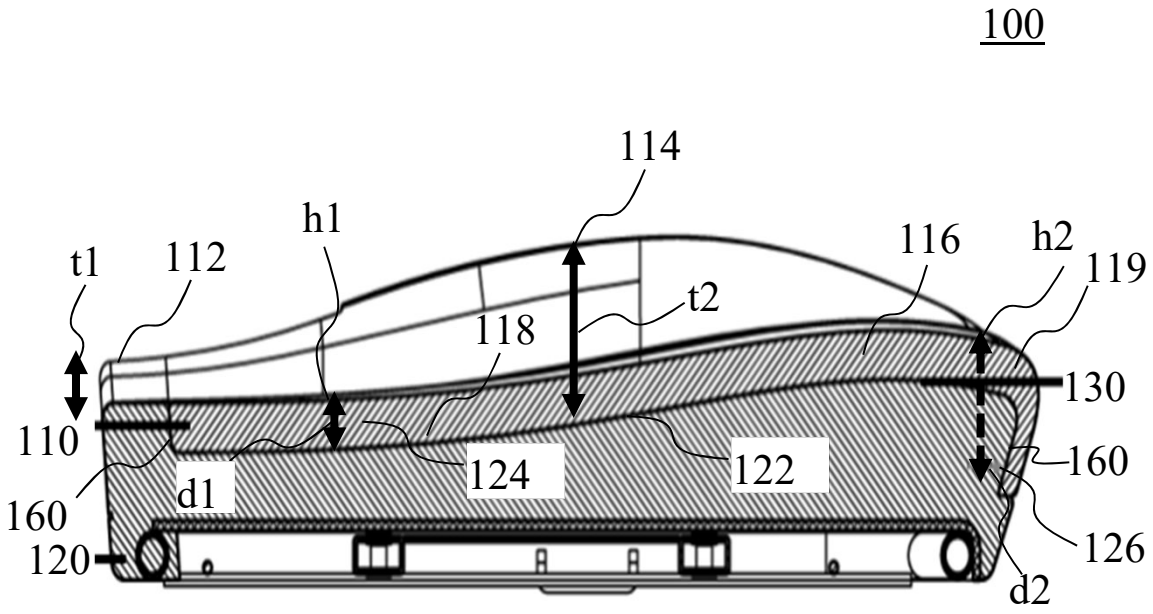

100
114
h1
t1
112
116
h2
119
t2
118
130
110
160
124
122
160
d1
126
120
d2

FIG. 2

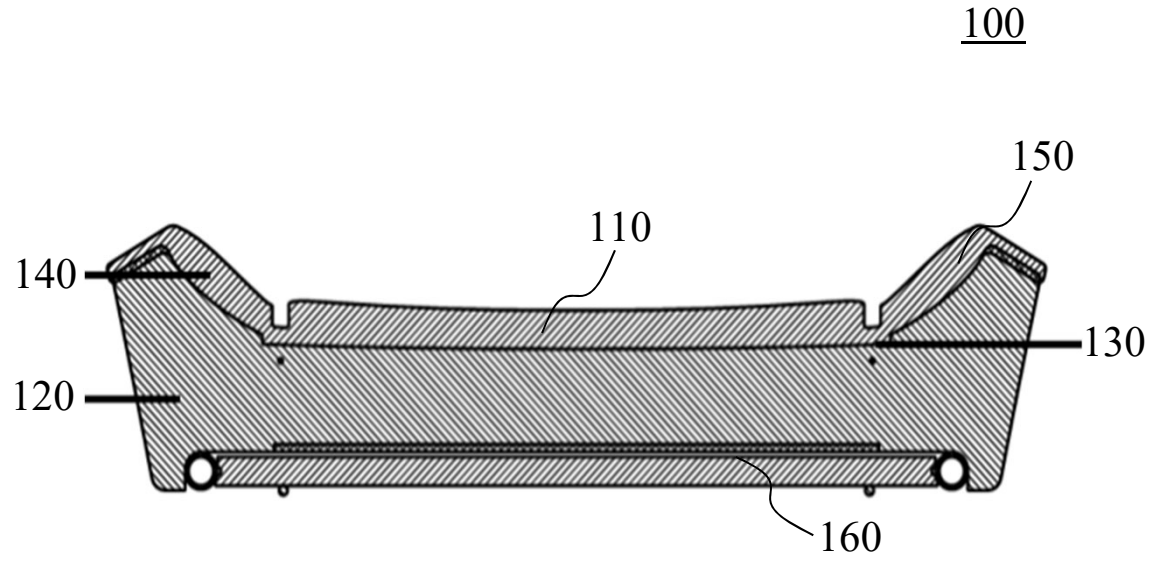

100
150
110
140
130
120
160

FIG. 3

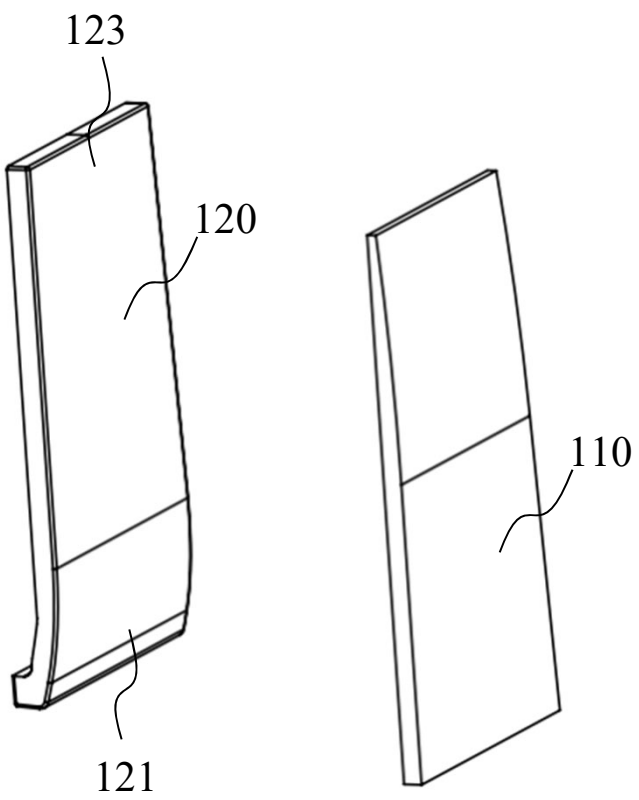


FIG. 4

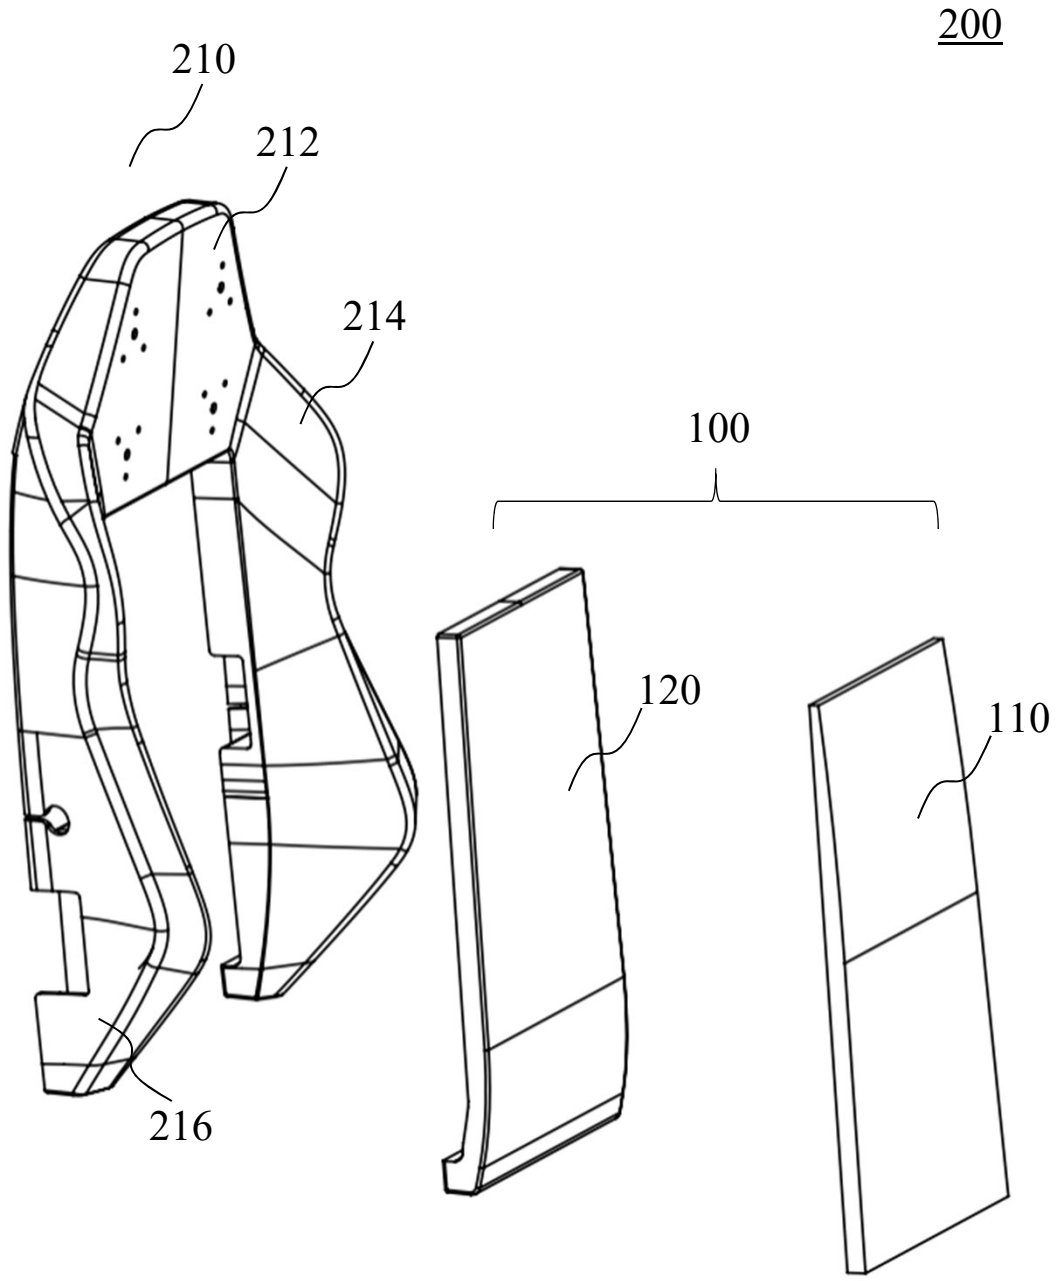


FIG. 5

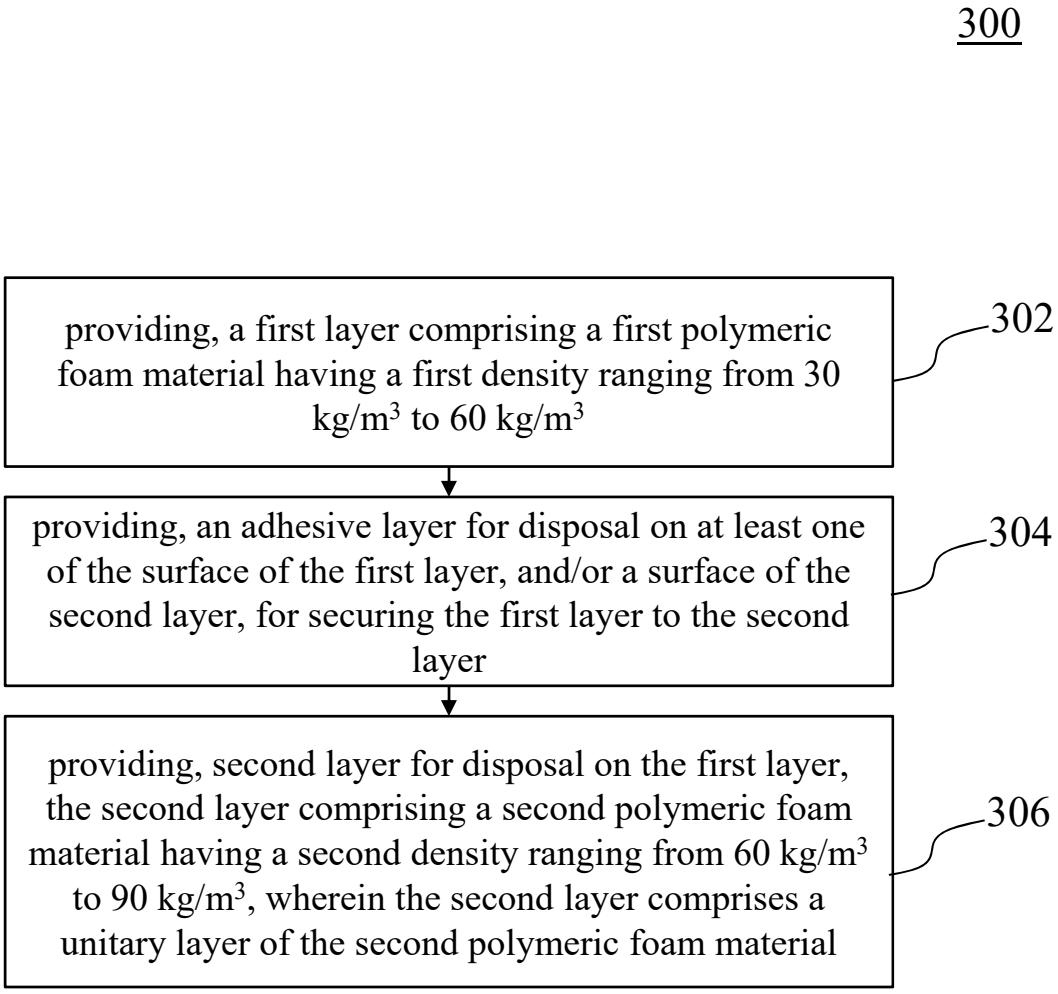

300
providing, a first layer comprising a first polymeric foam material having a first density ranging from 30 kg/m3 to 60 kg/m3
302
providing, an adhesive layer for disposal on at least one of the surface of the first layer, and/or a surface of the second layer, for securing the first layer to the second layer
304
providing, second layer for disposal on the first layer, the second layer comprising a second polymeric foam material having a second density ranging from 60 kg/m3 to 90 kg/m3, wherein the second layer comprises a unitary layer of the second polymeric foam material
306

FIG. 6

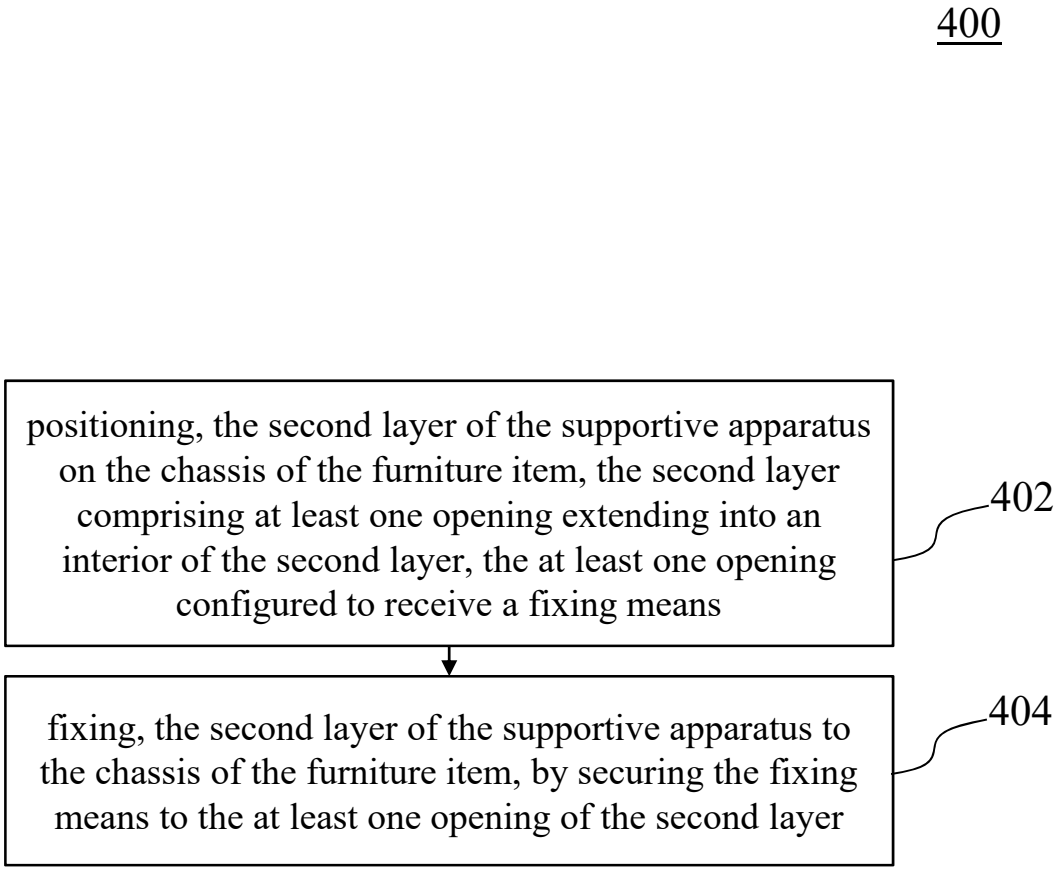

400
positioning, the second layer of the supportive apparatus on the chassis of the furniture item, the second layer comprising at least one opening extending into an interior of the second layer, the at least one opening configured to receive a fixing means
402
fixing, the second layer of the supportive apparatus to the chassis of the furniture item, by securing the fixing means to the at least one opening of the second layer
404

FIG. 7

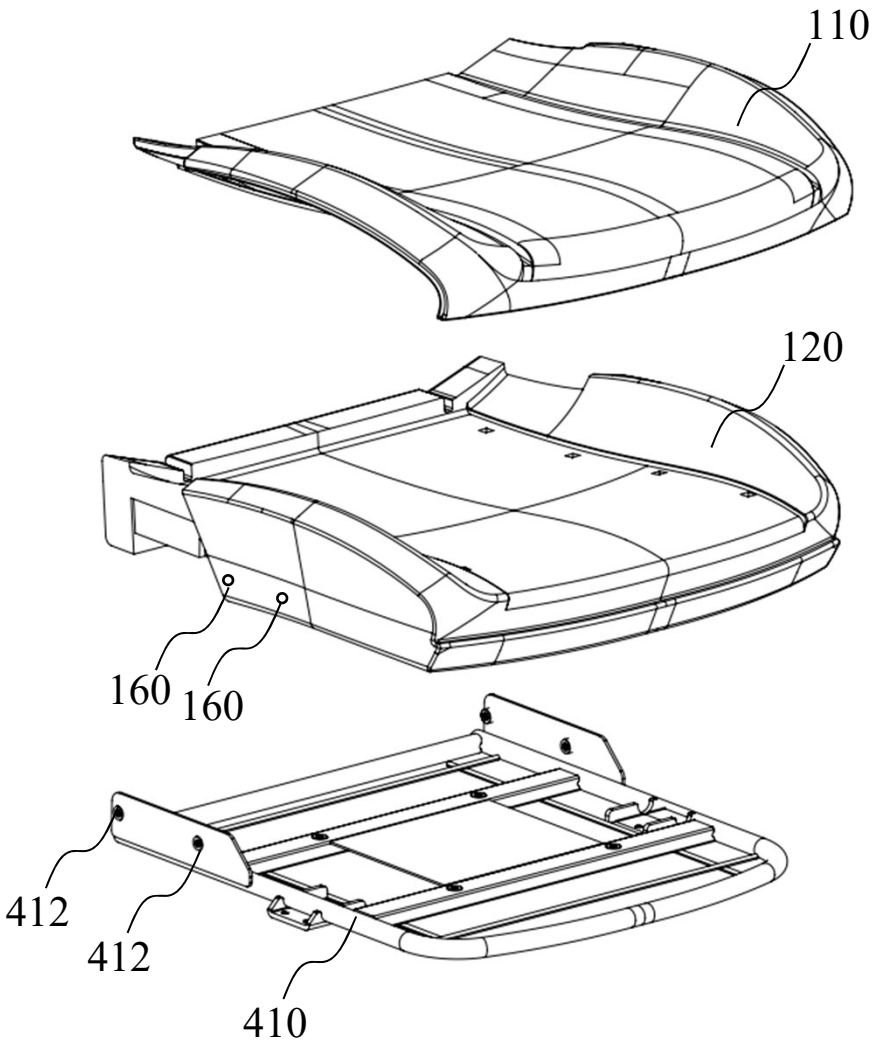


FIG. 8

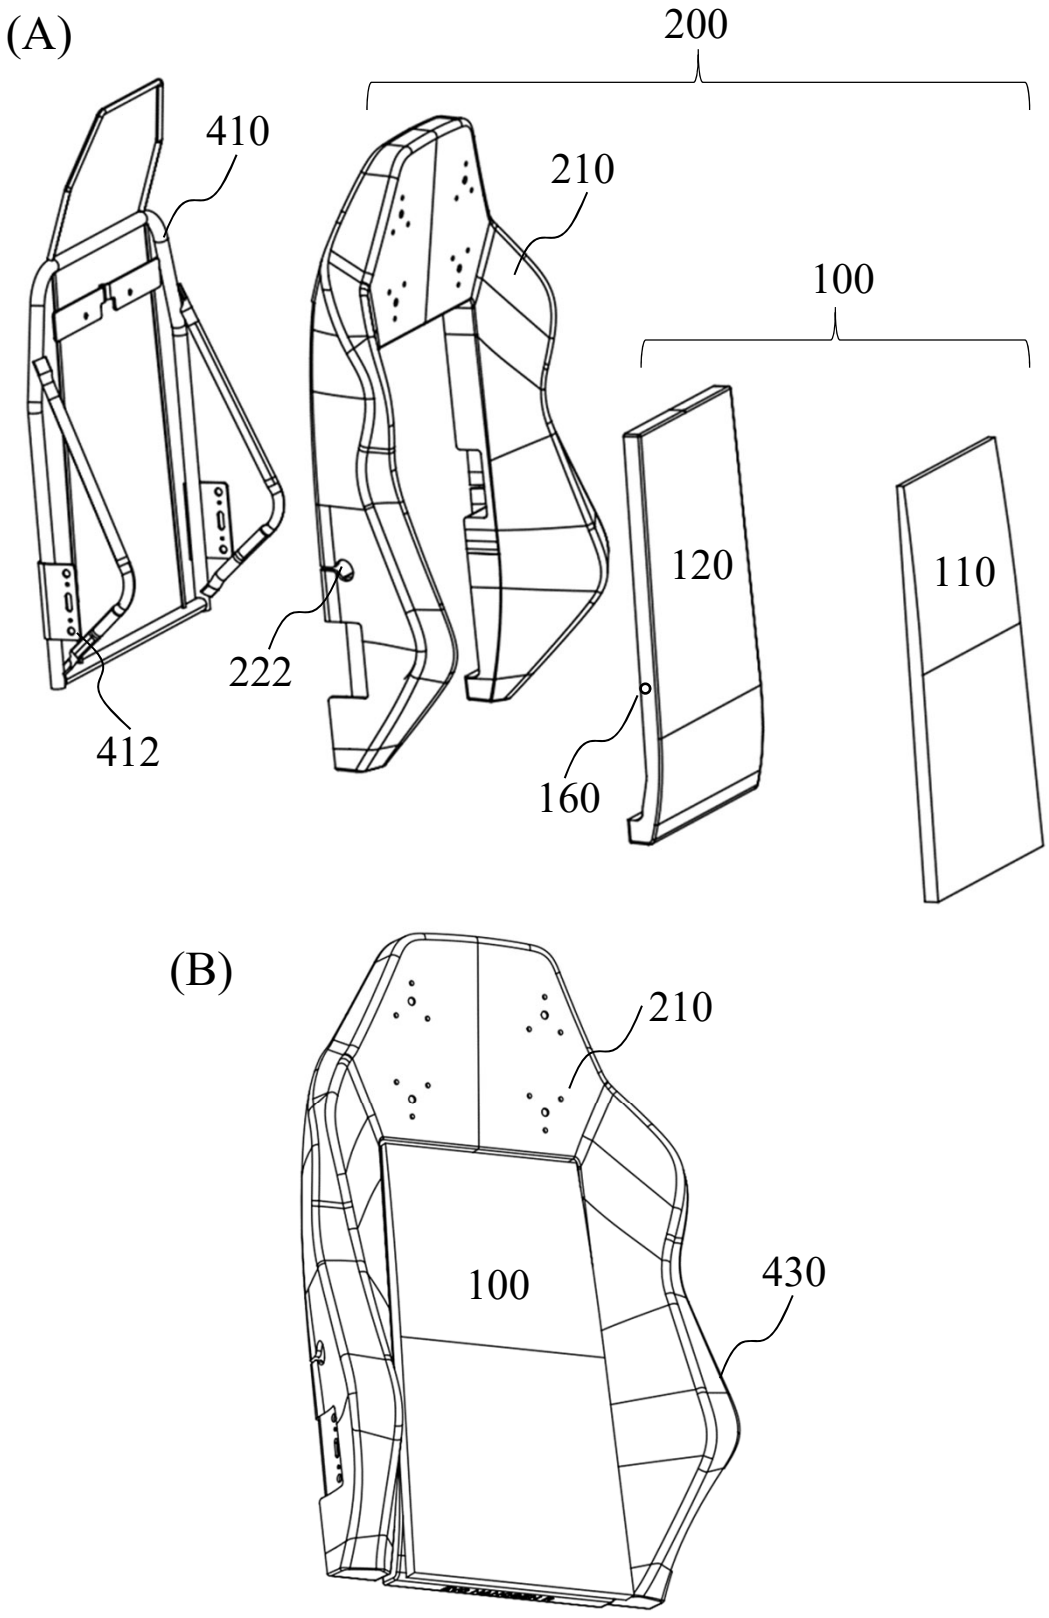


FIG. 9