DEVICE FOR CHARGING AN ACCUMULATOR USING A PHOTOVOLTAIC CELL AND TIMEPIECE COMPRISING SUCH A CHARGING DEVICE

The present invention concerns a device for charging an electric accumulator including a photovoltaic cell power source, coupled to the accumulator and a voltage multiplier connected in series between the power source and the accumulator.

The invention also concerns an electronic timepiece, in particular a watch or an alarm clock, including such a charging device.

However, the applications of a charging device according to the invention are not limited to the horological field, but can concern any electronic device including an electric accumulator and a photovoltaic cell power source intended for charging the accumulator, for example a pocket or table electronic calculator, a radio transmitter or receiver, an infrared signal remote control device, a sensor, and generally any device storing electric power generated by solar cells.

Currently, one tends to operate low consumption electronic devices at as low a supply voltage as possible, of the order of 1.0 to 1.5 volts, which represents a current lower limit for the proper operation of certain electronic components. However, the photovoltaic cells currently preferred for supplying these devices, whether of the photochemical or semi-conductor type, generally only provide a lower voltage, typically of the order of 0.3 to 0.5 volts, so that it is necessary to connect at least three of these cells in series (see for example British Patent Document GB-A-2 149 942). These cells are generally juxtaposed on a visible face of the device in order to benefit from the same lighting conditions. Such an arrangement can have drawbacks. On the one hand, in miniaturised devices, the manufacture of a small unit of several cells is more expensive than that of a single larger cell. On the other hand, in objects where aesthetic

This Sheet Has Been Replaced



appearance is important, as in the horological field, the lines of separation between the juxtaposed cells are often inconvenient and would disappear if a single cell could be used, or two superposed quasi transparent cells as described in the Patent Document WO 93/19405.

In application to a wristwatch, a power source formed of several juxtaposed photovoltaic cells connected in series has the additional drawback of being liable to a shadow effect by clothes: if for example a sleeve puts one of the cells in shadow, the voltage provided by the latter drops significantly and thus the total output voltage of the cells can drop to a value insufficient for charging the accumulator.

German Patent Application DE-A-29 00 622 describes a device capable of charging an accumulator by means of a solar cell whose output voltage is lower than the voltage across the accumulator terminals, as a result of a voltage converter including an inductor and a diode connected in series between the electric power source and the accumulator. The junction between the inductor and the diode is cyclically connected to earth by a transistor controlled by a monostable device. The latter receives an input signal originating from a photoresistive sensor which measures the illumination to which the solar cell is exposed. When the illumination increases, the time constant of the monostable device increases, which decreases the charge resistance of the solar cell in order to optimise it.

However, the described device is liable to consume more energy than it generates when the illumination of the cell is relatively low, which can eventually lead to the accumulator being discharged. Furthermore, it is difficult to optimise the operation thereof because the illumination response features of the solar cell and the photoresistor are generally different. On the other hand, the presence of the photoresistor as an additional external element is disadvantageous in several respects, in particular in a watch, because of the space which must be reserved for it,

This Sheet Has Been Replaced



the manufacturing cost, and the risk of it being subject to different illumination to the solar cell.

An object of the present invention is to avoid the aforementioned drawbacks, by providing an efficient, simple, inexpensive charging device which can advantageously be applied to a timepiece, in particular to a watch.

A particular object consists in arranging the charging device so that it consumes an extremely small amount of energy when the accumulator has a low state of charge and the photovoltaic cell is only slightly illuminated or not illuminated at all.

Another particular object consists, in the application of the device to an electronic timepiece, in combining the device with the energy consuming circuits of the watch so as to avoid the accumulator discharging excessively.

According to a first aspect of the invention, a charging device of the type indicated in the preamble is provided, characterised in that it includes control means arranged to switch on and off the voltage multiplier as a function of the output voltage of the electric power source and as a function of a state of charge of the accumulator.

Thus, the operation of the charging device can be limited to favourable periods, when the photovoltaic power source is sufficient to allow the accumulator to be really charged, and only when it is necessary, in particular to avoid overcharging which would decrease the lifespan of the accumulator.

It is possible to use as the electric power source a single photovoltaic cell providing a voltage which is only a fraction of the normal voltage across the accumulator terminals. If necessary, an electric power source including at least two photovoltaic cells connected in series, but together providing a voltage which can be lower than the voltage across the accumulator terminals can also be used.

This Sheet Has Been Replaced



A second aspect of the invention concerns an electronic timepiece including an electric accumulator, horometric means and display means which are supplied by the accumulator, characterised in that it includes a photovoltaic cell and voltage multiplier charging device as defined hereinbefore.

The combination of a charging device according to the invention with an electronic timepiece is particularly advantageous because it allows a single photovoltaic cell to be used, even if said cell is of a type having a relatively low output voltage. This allow the drawbacks outlined above with respect to aesthetic appearance and manufacturing cost to be avoided. This also facilitates the use of a practically transparent and invisible cell, preferably covering the entire expanse of the display means, on the side on which they are visible, and leaving the designer total freedom in the choice of the external appearance of the dial and the timepiece in general.

A third aspect of the invention concerns an electronic timepiece including an electric accumulator, horometric means and display means, the horometric means and the display means being supplied by the accumulator, and a charging device provided with a photovoltaic cell power source, coupled to the accumulator, characterised in that the charging device includes a voltage multiplier connected in series between the electric power source and the accumulator and including an inductor which is formed by a coil forming part of the display means or another device of the timepiece. In particular if the display means include a motor, said coil can form part of said motor.

This combination is especially advantageous because it avoids an additional inductance coil for the voltage multiplier. Said coil is the only relatively cumbersome and heavy component of the latter, whereas the other components can be made in an integrated circuit. The omission of a coil also simplifies assembly of the timepiece.

This Sheet Has Been Replaced



In the second and third aspect of the invention, the aforementioned control means for the charging device can be combined with the conventional electronic means of the timepiece with a view to saving energy when the state of charge of the accumulator is low, in particular by blocking the supply of the display means and/or the horometric means as a function of one or more limit states of discharge of the accumulator, parallel to the stopping of the voltage multiplier.

Other features and advantages of the present invention will appear in the following description of a preferred embodiment, given solely by way of example and with reference to the annexed drawings, in which:

- Figure 1 is a schematic partial cross-section of watch fitted with an electric accumulator and a voltage multiplier charging device according to the invention;
- Figure 2 is a block diagram of the electric circuits of the watch; and
- Figure 3 shows schematically an advantageous embodiment of the voltage multiplier.

Watch 1 shown schematically in Figure 1 includes a case 2 onto which is fixed a crystal 3, for example via a sealing gasket 4. In a conventional manner, a user can see, through crystal 3, display means including a dial 5 and hands 6 and 7 moving over the dial. A photovoltaic cell 8 is arranged for example between the hands and crystal 3, against which it is held applied by a ring 9 resting on dial 5. In this example, it is a transparent photovoltaic cell the nature and arrangement of which are described in Patent Document No. WO 93/19405. This cell completely covers the display means, and, as a result of its transparency, it has no effect upon the reading of the time and the appearance of the dial. When it receives light, its output voltage varies approximately between 0.3 and 0.5 volts according to the lighting conditions. It will be noted that cell 8 could also be placed on dial 5 or form the dial itself. In such case, an opaque cell, in particular made of silicon could be used.

This Sheet Has Been Replaced



Underneath dial 5, case 2 contains in particular an electronic clockwork movement 10 and an electric accumulator 11. In this example, it is a chemical accumulator, preferably of the lithium ions type, whose service voltage is comprised between 1.0 and 1.5 volts. It will be noted however, that the present invention can also be used with other types of electric accumulators and electrochemical capacitors, in particular super-capacitors. The electrodes of photovoltaic cell 8 are connected to the electric circuits situated underneath dial 5 by two conductors 12 only one of which is shown in Figure 1.

With reference to Figure 2, the display means of watch 1 include a stepping motor 13 which drives hands 6 and 7 using the energy provided by accumulator 11. Motor 13 is controlled by a conventional horometric integrated circuit 20 including an oscillator 21, for example controlled by a quartz resonator, and an electronic unit 22 including a divider circuit and memories, associated with a driving circuit 23 for the motor. The output signal of oscillator 21 is processed by unit 22 which controls driving circuit 23 in a suitable manner to display the time on dial 5 by means of hands 6 and 7. In order to monitor the voltage V_{DD} across the terminals of accumulator 11, integrated circuit 20 further includes a monitoring circuit 24 which compares this voltage to one or more limit voltages and consequently supplies a digital signal EOL which is able to take different values indicating that the accumulator voltage level is above or below these different limits. Circuits of this type, sometimes called end of life circuits and intended for indicating whether a battery has reached the end of its life, are well known in the horological field.

The charging device for accumulator 11 includes, in addition to photovoltaic cell 8, a DC-DC converter formed by a voltage multiplier 26 and controlled by a complementary static unit 27. Voltage multiplier 26 receives the output DC current from photovoltaic cell 8,

at variable voltage U_{SC}. When it is switched on, it multiplies said voltage, for example by a factor comprised between 2 and 4 according to the arrangement thereof, to supply an output voltage higher than existing voltage V_{DD} of accumulator 11.

The complementary static unit includes a static comparator 28, a logic unit 29 and a switching unit 30, these three elements being supplied by voltage V_{DD} of the accumulator. In this example, static comparator 28 preferably includes an inverter or follower circuit CMOS LV having a switching voltage set at 0.4 volts. This value is selected according to the voltage features of cell 8. It is fixed by the geometrical dimensions of the pair of p channel and n channel transistors of the inverter. Comparator 28 receives output voltage U_{SC} as input signal and, according to whether this voltage is less than or greater to the switching voltage, provides to logic unit 29 a binary output signal V_{SD} having the value 1 when $U_{SC} <$ 0.4 volts, and the value 0 when $U_{SC} >$ 0.4 volts. It will be noted that static comparator 28 can be replaced by other comparison circuits having an equivalent effect. It has however the advantage of avoiding the use of a reference source of voltage.

Logic unit 29 receives signals V_{SC} and EOL and, as a function of the state thereof, supplies binary output signals CONV, OSC and DRIVE to switching unit 30, in accordance with rules of logic which will be described hereinafter. These signals control electronic switches in unit 30 in order to supply voltage V_{DD} respectively to voltage multiplier 26, the assembly of oscillator 21 and unit 22, and to driving circuit 23 of motor 13.

In an embodiment of the device shown in Figure 2, monitoring unit 24 compares voltage V_{DD} of accumulator 11 to a single limit value, for example 1.0 volts, i.e. its output signal EOL is a binary signal. The two binary signals V_{SC} and EOL present at the input of logic unit 29 can thus have four possible combinations, corresponding to the four situations A to D shown in Table I, which shows

the values that this circuit attributes to signals CONV, OSC and DRIVE in each situation. The value 1 represents the switching on of the corresponding element, and the value 0 the switching off thereof.

Table I

Case	USC ≥ 0.4 s	VDD ≥ 1.0 v	CONV	OSC	DRIVE
A	No	No	0	0*	0
B	Yes	No	1	0*	0
C	No	Yes	0	1	1
D	Yes	Yes	1	1	1

It will be noted that voltage converter or multiplier 26 is only switched on when cell 8 supplies a voltage greater than or equal to 0.4 volts. With the type of accumulator used here, there is no risk of overcharging since the voltage across the terminals of the completely charged accumulator rises to close to 2 volts, a value which cannot be reached by the voltage of the cell after multiplication.

Below a limit value of 1.0 volts across the terminals of accumulator 11, horometric circuits 21 and 22 and display means 23 and 13 are switched off in order to save energy. This limit is selected so as to keep between 10 and 20% of the accumulator charge, in order to be able still to operate the charging device when cell 8 again receives light after a long period of darkness, which can be up to one year, according to the value of the self-discharging current of the accumulator.

The signs * in the OSC column indicate the possibility of a variant in which monitoring circuit 24 monitors two distinct limit voltages on the curve of discharge of accumulator 11, for example a first limit at 1.1 volts and a second limit at 1.0 volts. Signal EOL then has several bits. In this case, in a first stage of discharge where the voltage is between 1.1 and 1.0 volts,

logic unit 29 gives signal DRIVE the value 0 in order to switch off elements 23 and 13 which consume the most current, i.e. the display is stopped. Conversely, horometric circuits 21 to 22 continue to operate so that the watch keeps time when the accumulator is charged. It is only if voltage VDD drops below 1.0 volts that signal OSC passes to 0 to stop the horometric circuits. The residual charge of the accumulator is nonetheless sufficient to supply the charging device when photovoltaic cell 8 is again subjected to light.

It will be noted that monitoring circuit 24 can also indicate via signal EOL that the level of charge of accumulator 11 is very high. Logic unit 29 can then switch off voltage multiplier 26 via signal CONV in order to control the accumulator.

Figure 3 shows a known embodiment of DC voltage multiplier 26, including an electronic switch 32 connected in parallel to accumulator 11 between a node 33 and earth, a Schottky diode 34 being connected in series between node 33 and the accumulator, while an inductor 35 is connected in series between node 33 and input terminal 36 which receives voltage USC from photovoltaic cell 8. Switch 32 is periodically opened and closed by a control circuit 37 activated by a validation signal EN CNV originating from switching unit 30. At each opening of switch 32, the high voltage induced current due to inductor 35 charges accumulator 11. Switch 32 and its control circuit 37 can be made for example by means of a MAX 631 type circuit by the Maxim company.

One advantageous aspect of this voltage multiplier consists in using the stator inductive coil of stepping motor 13, normally intended for driving the watch display means, as inductor 35. Since this motor only operates for short moments for the display, it is possible to connect its coil to voltage multiplier 26 outside such moments, i.e. most of the time. One thus avoids adding a coil, which is a relatively heavy and voluminous element, to the watch, to make the device according to the invention. The

coil will then be preceded and followed by electronic switching devices 38 and 39, arranged to connect it alternately to voltage multiplier 26 and to the circuit of motor 13 as a function of control signals X originating from driving circuit 23. It will be noted that device 39 is not necessary in all cases, as a result of the presence of diode 34.

The charging device could also use, instead of the stator coil of motor 13, any other existing coil in another device of the timepiece, in particular in an alarm device, a voltage transformer for supplying for example an electroluminescent element, or a coil connected in parallel to a piezoelectric motor.

The use of the motor coil or the coil of another device as inductor 35 of the voltage converter allows a light, compact and inexpensive construction, which is thus well suited to horological applications, because the other components of the converter can easily be included in an integrated circuit containing static unit 27, in particular integrated circuit 20 described hereinbefore.

It should be noted that the applications of the invention are not limited to the case of photovoltaic cells of the photochemical type, but also extend to any other type, in particular to monocrystalline or polycrystalline amorphous silicon cells.

* C L M S *

THIS SHEET HAS BEEN REPLACED

CLAIMS

1. Charging device for an electric accumulator, comprising a photovoltaic cell power source (8), coupled to the accumulator (11) and a voltage multiplier (26) connected in series between the electric power source and the accumulator, characterised in that it includes control means (24, 27) arranged for switching the voltage multiplier (26) on and off as a function of the output voltage (U_{sc}) of the electric power source (8) and as a function of the state of charge (EOL) of the accumulator.

2. Charging device according to claim 1, characterised in that the electric power source (8) includes a single photovoltaic cell.

3. Charging device according to claim 1, characterised in that the electric power source (8) includes at least two photovoltaic cells connected in series.

4. Charging device according to claim 1, characterised in that the control means (24, 27) include a comparison unit (28), arranged for receiving an analog signal representative of the output voltage (U_{sc}) of the electric power source (8) and providing a binary signal (V_{sc}) indicating whether said output voltage is more or less than a predetermined threshold.

5. Charging device according to claim 4, characterised in that the comparison unit (28) is a static comparator supplied by the accumulator.

6. Charging device according to claim 5, characterised in that the static comparator (28) is an inverter or follower CMOS circuit, including at least one pair of complementary p and n type transistors, the static comparator having a switching voltage which is fixed by the geometrical dimensions of said transistors.

7. Charging device according to claim 4, characterised in that the control means (24, 27) include a voltage monitoring circuit (24), receiving as input the voltage (VDD) across the terminals of the accumulator and

This Sheet Has Been Replaced

supplying an accumulator voltage signal (EOL), and a logic circuit (29) receiving said binary signal (V_{sc}) and said accumulator voltage signal (EOL) and supplying at least one control signal (CONV) to switch the voltage multiplier on or off.

8. Electronic timepiece (1) including an electric accumulator (11), horometric means (21, 22) and display means (6, 7, 13, 23), supplied by the accumulator, characterised in that it includes a charging device provided with a photovoltaic cell power source (8), and a voltage multiplier according to any of the claims 1 to 7.

9. Timepiece including an electric accumulator (11), horometric means (21, 22) and display means (6, 7, 13, 23), the horometric means and the display means being supplied by the accumulator, and a charging device provided with a photovoltaic cell power source (8), coupled to the accumulator (11), characterised in that said charging device includes a voltage multiplier (26) connected in series between the electric power source and the accumulator and including an inductor (35) which is formed by a coil forming part of the display means or of another device of the timepiece.

10. Timepiece according to claim 9, characterised in that the display means include a motor (13) and in that said coil forms part of said motor.

11. Timepiece according to claim 8 or 9, characterised in that the charging device includes control means (24, 27) arranged for switching the voltage multiplier on and off as a function of the output voltage (U_{sc}) of the photovoltaic cell power source (8).

12. Timepiece according to claim 11, characterised in that said control means (24, 27) are also arranged for blocking the supply of the display means (6, 7, 13, 23) when the state of charge of the accumulator is less than a first limit state.

13. Timepiece according to claim 12, characterised in that said control means (24, 27) are also arranged for blocking the supply of the horometric means (21, 22) when

THIS SHEET HAS BEEN REPLACED

the state of charge of the accumulator is less than the first limit state or than a second limit state.

14. Timepiece according to any of claims 8 to 13, characterised in that the electric power source (8) includes one or more substantially transparent photovoltaic cells extending in front of the display means, on the side on which the latter are visible.

This Sheet Has Been Replaced

ABSTRACT

DEVICE FOR CHARGING AN ACCUMULATOR USING A PHOTOVOLTAIC CELL AND TIMEPIECE COMPRISING SAME

A device for charging a battery (11), comprising a photovoltaic cell power source (8) of which the output voltage (USC) is lower than the voltage (VDD) across the terminals of the battery. Said output voltage is raised by a voltage multiplier (26) controlled by a static unit (27) depending on the two respective voltage levels. The source may advantageously comprise a single cell (8). In a timepiece provided with said charging device, the static control unit (27) can also cut off the power supply to display means (13, 23) and time-keeping circuits (21, 22) when the voltage of the battery (11) is too low. The voltage multiplier may use the motor coil (13) of the display means or any other coil used in the timepiece.

Figure 2

This Sheet Has Been Replaced



Fig .1

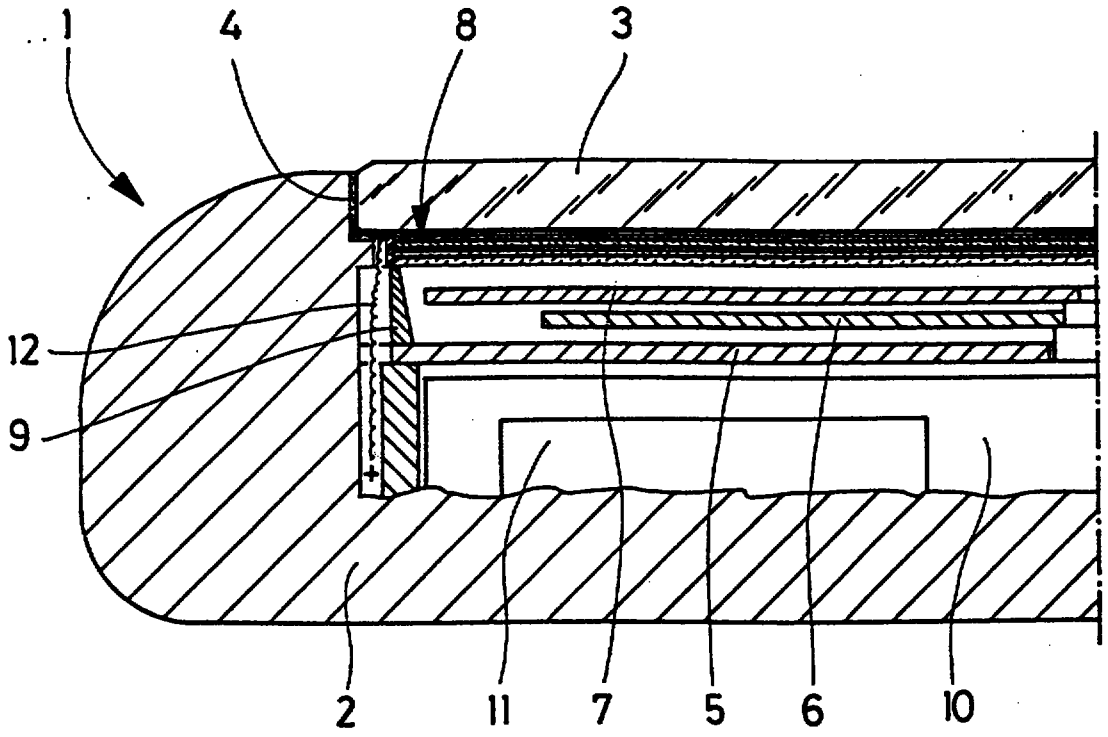
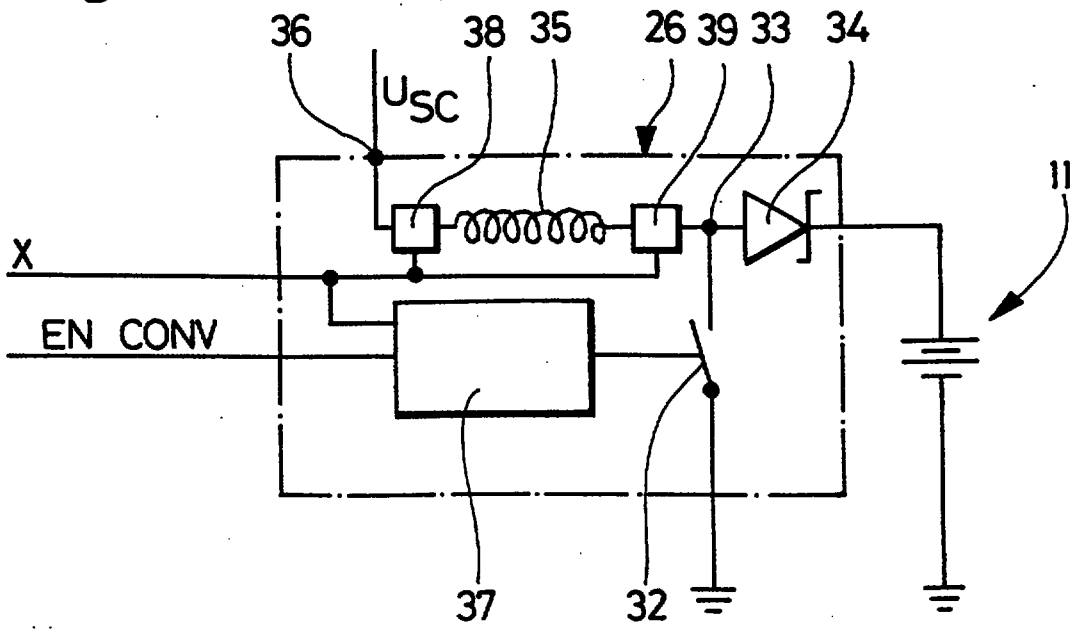


Fig . 3



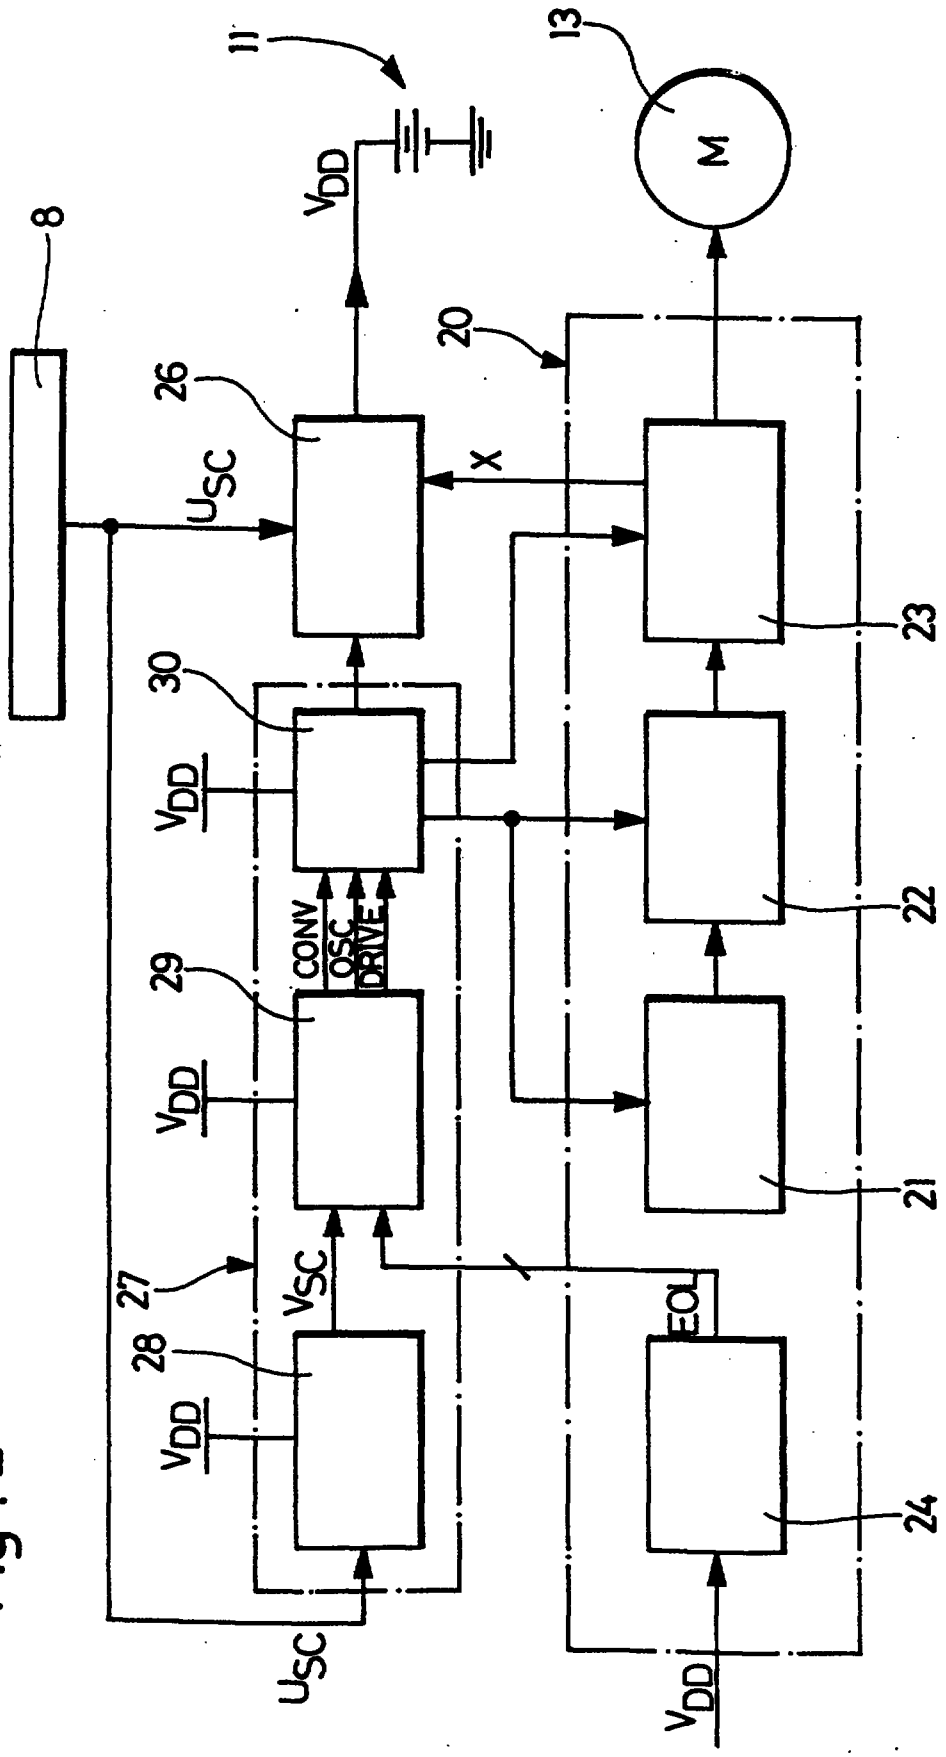

11
13
M
8
V_{DD}
20
26
U_{SC}
X
23
30
V_{DD}
22
CONV
OSC
DRIVE
29
V_{DD}
21
27
V_{SC}
EQL
28
V_{DD}
24
U_{SC}
V_{DD}

Fig. 2

THIS SHEET HAS BEEN REPLACED

CLAIMS (translation of the claims annexed to the international preliminary examination report)

1. Electronic timepiece (1) including an electric accumulator (11), horometric means (21, 22) and display means (6, 7, 13, 23), the horometric means and the display means being supplied by the accumulator, and a charging device provided with a photovoltaic cell power source (8), coupled to the accumulator (11), characterised in that the charging device includes a voltage multiplier (26) connected in series between the electric power source and the accumulator and including an inductor (35) which is formed by a coil forming part of the display means or of another device of the timepiece.

2. Timepiece according to claim 1, characterised in that the display means include a motor (13) and in that said coil forms part of said motor.

3. Timepiece according to claim 1, characterised in that the charging device includes control means (24, 27) arranged for switching the voltage multiplier on and off as a function of the output voltage (U_{sc}) of the photovoltaic cell power source (8).

4. Timepiece according to claim 3, characterised in that said control means (24, 27) are also arranged for blocking the supply of the display means (6, 7, 13, 23) when the state of charge of the accumulator is less than a first limit state.

5. Timepiece according to claim 4, characterised in that said control means (24, 27) are also arranged for blocking the supply of the horometric means (21, 22) when the state of charge of the accumulator is less than the first limit state or than a second limit state.

6. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes one or more substantially transparent photovoltaic cells extending in front of the display means, on the side on which the latter are visible.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

7. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes a single photovoltaic cell.

8. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes at least two photovoltaic cells connected in series.

9. Timepiece according to claim 3, characterised in that the control means (24, 27) include a comparison unit (28), arranged for receiving an analog signal representative of the output voltage (U_{sc}) of the electric power source (8) and providing a binary signal (V_{sc}) indicating whether said output voltage is more or less than a predetermined threshold.

10. Timepiece according to claim 9, characterised in that the comparison unit (28) is a static comparator supplied by the accumulator.

11. Timepiece according to claim 10, characterised in that the static comparator (28) is an inverter or follower CMOS circuit, including at least one pair of complementary p and n type transistors, the static comparator having a switching voltage which is fixed by the geometrical dimensions of said transistors.

12. Timepiece according to claim 9, characterised in that the control means (24, 27) include a voltage monitoring circuit (24), receiving as input the voltage (VDD) across the terminals of the accumulator and supplying an accumulator voltage signal (EOL), and a logic circuit (29) receiving said binary signal (V_{sc}) and said accumulator voltage signal (EOL) and supplying at least one control signal (CONV) to switch the voltage multiplier on or off.

This Sheet Has Been Replaced

REPLACEMENT SHEET
17 SEP 1998

980540-F
IPOS's copy

TIMEPIECE COMPRISING A CHARGING DEVICE FOR CHARGING AN ACCUMULATOR USING A PHOTOVOLTAIC CELL

The present invention relates to a device for charging an electric accumulator including a photovoltaic cell power source, coupled to the accumulator and a voltage multiplier connected in series between the power source and the accumulator.

The invention concerns more specifically an electronic timepiece, in particular a watch or an alarm clock, including such a charging device.

However, the applications of such a charging device are not limited to the horological field, but can concern any electronic device including an electric accumulator and a photovoltaic cell power source intended for charging the accumulator, for example a pocket or table electronic calculator, a radio transmitter or receiver, an infrared signal remote control device, a sensor, and generally any device storing electric power generated by solar cells.

Currently, one tends to operate low consumption electronic devices at as low a supply voltage as possible, of the order of 1.0 to 1.5 volt, which represents a current lower limit for the proper operation of certain electronic components. However, the photovoltaic cells currently preferred for supplying these devices, whether of the photochemical or semi-conductor type, generally only provide a lower voltage, typically of the order of 0.3 to 0.5 volt, so that it is necessary to connect at least three of these cells in series (see for example British Patent Document GB-A-2 149 942). These cells are generally juxtaposed on a visible face of the device in order to benefit from the same lighting conditions. Such an arrangement can have drawbacks. On the one hand, in miniaturised devices, the manufacture of a small unit of several cells is more expensive than that of a single larger cell. On the other hand, in objects where aesthetic appearance is important, as in the horological field, the

lines of separation between the juxtaposed cells are often inconvenient and would disappear if a single cell could be used, or two superposed quasi transparent cells as described in the Patent Document WO 93/19405.

In application to a wristwatch, a power source formed of several juxtaposed photovoltaic cells connected in series has the additional drawback of being liable to a shadow effect by clothes: if for example a sleeve puts one of the cells in shadow, the voltage provided by the latter drops significantly and thus the total output voltage of the cells can drop to a value insufficient for charging the accumulator.

German Patent Application DE-A-29 00 622 describes a device capable of charging an accumulator by means of a solar cell whose output voltage is lower than the voltage across the accumulator terminals, as a result of a voltage converter including an inductor and a diode connected in series between the electric power source and the accumulator. The junction between the inductor and the diode is cyclically connected to earth by a transistor controlled by a monostable device. The latter receives an input signal originating from a photoresistive sensor which measures the illumination to which the solar cell is exposed. When the illumination increases, the time constant of the monostable device increases, which decreases the charge resistance of the solar cell in order to optimise it.

However, the described device is liable to consume more energy than it generates when the illumination of the cell is relatively low, which can eventually lead to the accumulator being discharged. Furthermore, it is difficult to optimise the operation thereof because the illumination response features of the solar cell and the photoresistor are generally different. On the other hand, the presence of the photoresistor as an additional external element is disadvantageous in several respects, in particular in a watch, because of the space which must be reserved for it,

REPLACEMENT SHEET
17 SEP 1998

the manufacturing cost, and the risk of it being subject to different illumination to the solar cell.

An object of the present invention is to avoid the aforementioned drawbacks, by providing an efficient, simple, inexpensive charging device which can advantageously be applied to a timepiece, in particular to a watch.

A particular object consists in arranging the charging device so that it consumes an extremely small amount of energy when the accumulator has a low state of charge and the photovoltaic cell is only slightly illuminated or not illuminated at all.

Another particular object consists, in the application of the device to an electronic timepiece, in combining the device with the energy consuming circuits of the watch so as to avoid the accumulator discharging excessively.

A basic aspect of the invention concerns an electronic timepiece including an electric accumulator, horometric means and display means, the horometric means and the display means being supplied by the accumulator, and a charging device provided with a photovoltaic cell power source, coupled to the accumulator, characterised in that the charging device includes a voltage multiplier connected in series between the electric power source and the accumulator and including an inductor which is formed by a coil forming part of the display means or another device of the timepiece. In particular if the display means include a motor, said coil can form part of said motor.

This combination is especially advantageous because it avoids an additional inductance coil for the voltage multiplier. Said coil is the only relatively cumbersome and heavy component of the latter, whereas the other components can be made in an integrated circuit. The omission of a coil also simplifies assembly of the timepiece.

REPLACEMENT SHEET

17 SEP 1998

Furthermore, the aforementioned control means for the charging device can be combined with the conventional electronic means of the timepiece with a view to saving energy when the state of charge of the accumulator is low, in particular by blocking the supply of the display means and/or the horometric means as a function of one or more limit states of discharge of the accumulator, parallel to the stopping of the voltage multiplier.

Thus, the operation of the charging device can be limited to favourable periods, when the photovoltaic power source is sufficient to allow the accumulator to be really charged, and only when it is necessary, in particular to avoid overcharging which would decrease the lifespan of the accumulator.

It is possible to use as the electric power source a single photovoltaic cell providing a voltage which is only a fraction of the normal voltage across the accumulator terminals. If necessary, an electric power source including at least two photovoltaic cells connected in series, but together providing a voltage which can be lower than the voltage across the accumulator terminals can also be used.

The combination of a charging device as defined hereinbefore with an electronic timepiece is particularly advantageous because it allows a single photovoltaic cell to be used, even if said cell is of a type having a relatively low output voltage. This allow the drawbacks outlined above with respect to aesthetic appearance and manufacturing cost to be avoided. This also facilitates the use of a practically transparent and invisible cell, preferably covering the entire expanse of the display means, on the side on which they are visible, and leaving the designer total freedom in the choice of the external appearance of the dial and the timepiece in general.

Other features and advantages of the present invention will appear in the following description of a preferred embodiment, given solely by way of example and with reference to the annexed drawings, in which:

REPLACEMENT SHEET
17 SEP 1998

- Figure 1 is a schematic partial cross-section of watch fitted with an electric accumulator and a voltage multiplier charging device according to the invention;

- Figure 2 is a block diagram of the electric circuits of the watch; and

- Figure 3 shows schematically an advantageous embodiment of the voltage multiplier.

Watch 1 shown schematically in Figure 1 includes a case 2 onto which is fixed a crystal 3, for example via a sealing gasket 4. In a conventional manner, a user can see, through crystal 3, display means including a dial 5 and hands 6 and 7 moving over the dial. A photovoltaic cell 8 is arranged for example between the hands and crystal 3, against which it is held applied by a ring 9 resting on dial 5. In this example, it is a transparent photovoltaic cell the nature and arrangement of which are described in Patent Document No. WO 93/19405. This cell completely covers the display means, and, as a result of its transparency, it has no effect upon the reading of the time and the appearance of the dial. When it receives light, its output voltage varies approximately between 0.3 and 0.5 volt according to the lighting conditions. It will be noted that cell 8 could also be placed on dial 5 or form the dial itself. In such case, an opaque cell, in particular made of silicon could be used.

REPLACEMENT SHEET
17 SEP 1998

CLAIMS

1. Electronic timepiece (1) including an electric accumulator (11), horometric means (21, 22) and display means (6, 7, 13, 23), the horometric means and the display means being supplied by the accumulator, and a charging device provided with a photovoltaic cell power source (8), coupled to the accumulator (11), characterised in that the charging device includes a voltage multiplier (26) connected in series between the electric power source and the accumulator and including an inductor (35) which is formed by a coil forming part of the display means or of another device of the timepiece.

2. Timepiece according to claim 1, characterised in that the display means include a motor (13) and in that said coil forms part of said motor.

3. Timepiece according to claim 1, characterised in that the charging device includes control means (24, 27) arranged for switching the voltage multiplier on and off as a function of the output voltage (U_{sc}) of the photovoltaic cell power source (8).

4. Timepiece according to claim 3, characterised in that said control means (24, 27) are also arranged for blocking the supply of the display means (6, 7, 13, 23) when the state of charge of the accumulator is less than a first limit state.

5. Timepiece according to claim 4, characterised in that said control means (24, 27) are also arranged for blocking the supply of the horometric means (21, 22) when the state of charge of the accumulator is less than the first limit state or than a second limit state.

6. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes one or more substantially transparent photovoltaic cells extending in front of the display means, on the side on which the latter are visible.

REPLACEMENT SHEE

17 SEP 1998

7. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes a single photovoltaic cell.

8. Timepiece according to any of claims 1 to 5, characterised in that the electric power source (8) includes at least two photovoltaic cells connected in series.

9. Timepiece according to claim 3, characterised in that the control means (24, 27) include a comparison unit (28), arranged for receiving an analog signal representative of the output voltage (U_{SC}) of the electric power source (8) and providing a binary signal (V_{SC}) indicating whether said output voltage is more or less than a predetermined threshold.

10. Timepiece according to claim 9, characterised in that the comparison unit (28) is a static comparator supplied by the accumulator.

11. Timepiece according to claim 10, characterised in that the static comparator (28) is an inverter or follower CMOS circuit, including at least one pair of complementary p and n type transistors, the static comparator having a switching voltage which is fixed by the geometrical dimensions of said transistors.

12. Timepiece according to claim 9, characterised in that the control means (24, 27) include a voltage monitoring circuit (24), receiving as input the voltage (V_{DD}) across the terminals of the accumulator and supplying an accumulator voltage signal (EOL), and a logic circuit (29) receiving said binary signal (V_{SC}) and said accumulator voltage signal (EOL) and supplying at least one control signal (CONV) to switch the voltage multiplier on or off.

REPLACEMENT SHEET

17 SEP 1998

ABSTRACT

TIMEPIECE COMPRISING A CHARGING DEVICE
FOR CHARGING AN ACCUMULATOR USING A PHOTOVOLTAIC CELL

The timepiece is provided with a device for charging its accumulator (11), comprising a photovoltaic cell power source (8) of which the output voltage (USC) is lower than the voltage (VDD) across the terminals of the accumulator. Said output voltage is raised by a voltage multiplier (26) controlled by a static unit (27) depending on the two respective voltage levels. The source may advantageously comprise a single cell (8). In a timepiece provided with said charging device, the static control unit (27) can also cut off the power supply to display means (13, 23) and time-keeping circuits (21, 22) when the voltage of the accumulator (11) is too low. The voltage multiplier uses the motor coil (13) of the display means or any other coil used in the timepiece.

Figure 2

REPLACEMENT SHEET
17 SEP 1998