

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2007 (29.11.2007)

PCT

(10) International Publication Number
WO 2007/136366 A2

(51) International Patent Classification:
G01F 23/20 (2006.01)

(74) Agents: **SALAI, Stephen, B.** et al.; Harter, Secrest & Emery LLP, 1600 Bausch & Lomb Place, Rochester, NY 14604-2711 (US).

(21) International Application Number:

PCT/US2006/019315

(22) International Filing Date: 19 May 2006 (19.05.2006)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **QUALITROL CORPORATION** [US/US]; 1385 Fairport Road, Fairport, NY 14450-1309 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HERZ, Joshua, J.** [US/US]; 281 Barrington Street, Rochester, NY 14607 (US). **LINDMARK, John, Peter** [SE/SE]; Snoflingebacken 2, SE-12948 Hagersten (SE). **LARSSON, Per, Arne** [SE/SE]; Safirgängen 42, SE-135 49 Tyreso (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: CALIBRATABLE FLUID LEVEL MONITORING GAUGE

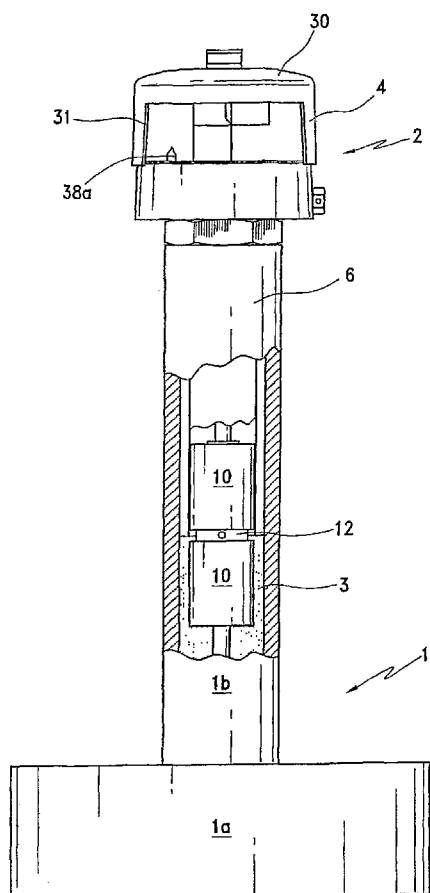

(57) Abstract: A calibratable vertical fluid level gauge (2) for displaying a fluid level in an enclosed vessel (1) includes a float portion (6) and a gauge portion (4). The float portion (6) is disposed within the enclosed vessel (1) and converts a vertical displacement of a float (10) into a rotational displacement of a first rotating member (26). The gauge portion (4) is disposed on an exterior of the enclosed vessel (1) and includes a second rotating member (34), a pointer (38), and a clutch mechanism (42). The gauge portion (4) is arranged with respect to the float portion (6) such that the second rotating member (34) is rotatably coupled to the first rotating member (26). The clutch mechanism (42) selectively engages the pointer (38) to the second rotating member (34) and disengages the pointer (38) from the second rotating member (34) to allow movement of the pointer (38) with respect to the second rotating member (34) to calibrate the gauge (2).



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*