

**PRINTER CONTROL DEVICE AND METHOD FOR
CONTROLLING A PRINTER**

The invention relates to a printer control device for a printer adapted to work with a variety of paper sources and/or a variety of types of paper, and to a method for controlling such printer.

Such printer control devices may have two or more paper detectors for detecting presence or absence of paper, for controlling the printing operation of the printer based on the condition of those paper detectors and for notifying a host computer of the condition of the paper detectors. These printer control devices do not have means for selecting a desired paper detector among the two or more existing paper detectors, and the presence or absence of paper is actually detected by means of a preset selection means.

The selection means may be adapted to indicate absence of paper when all of the paper detectors detect absence of paper, or to indicate absence of paper if at least one of the paper detectors detects absence of paper. Control of the printing operation of the printer is performed based on the presence or absence of paper as indicated by the preset selection means.

For notifying a host computer of the presence or absence of paper, one possibility is to transmit the condition indicated by the preset selection means via one transmission line, while another possibility is to have respective transmission lines associated with each of the paper detectors.

Were the host computer and the printer control device are integrated into a stand-alone system, it is no problem to increase the terminals for paper detectors because the control device can be connected to the printer with special signal lines including individual lines for each paper detector. Early point-of-sale (POS) terminals are an example of such stand-alone systems. Nowadays personal computers are more and more used even for POS terminals. Personal computers are connected to printers via standard interfaces of which the parallel interface, the so-called "Centronics" interface is the most common one. This parallel interface provides only one signal line (commonly referred to as PE) for transmitting information about presence or absence of paper to the personal computer.

The above mentioned selection means can be used in a personal computer system employing the parallel interface. This would require, however, that the selection means be preset to one of plural paper detectors and does not allow to select a desired paper detector by means of a control command from the personal computer.

It is an object of the present invention to provide a printer control device and a method for controlling a printer that allow selection of a specified paper detector among plural paper detectors based on a control command from the host computer and to notify the host computer about the condition of the selected paper detector by using one transmission line so that a standard parallel interface can be employed.

This object is achieved with a printer control device and a method as claimed.

The present invention is especially, though not exclusively, useful for newer POS printers which can work with a variety of paper sources. These printers were hard to control in the past because the individual paper status of each paper source could not be polled. The system had to assume the paper was ready, and very often it was not.

A preferred embodiment of the present invention will be described below with reference to the drawings, in which:

Fig. 1 is a block diagram of an embodiment of the present invention,

Fig. 2 is a simplified diagram of the detector selection means, stop control means and transmission control means according to the invention,

Fig. 3 is a flowchart for explaining the detector selection according to the invention,

Fig. 4 is a flowchart for explaining the stop control according to the invention,

Fig. 5 is a flowchart for explaining the transmission control according to the invention,

Fig. 6 is a table illustrating an example of a control command output from the host computer for the stop control means and

Fig. 7 is a table illustrating an example of a control command output from the host computer for the transmission control means.

In Fig. 1, 1, 2 and 3 are paper detectors assuming a first state when they detect a paper absent condition and a second state when they detect a paper present condition, and outputting a corresponding signal to a detector selection means 4. It should be noted, that three paper detectors are shown as an example only and that two paper detectors or more than three paper detectors may be employed. The detector selections means 4 selects one of the paper detectors 1, 2 and 3 based on a control command received from a host computer 7 via an interface 6. A stop control means 8 stops the printing operation of a printing mechanism 9 based on the state of the paper detector selected by the detector selections means 4. A transmission control means 5 detects the state of the paper detector selected by the detector selections means 4 and notifies the host computer 7 via the interface 6 of the result as will be explained in more detail below.

Fig. 6 shows a table illustrating an example of control command output from the host computer for the stop control means. [ESC + c + 4 + n] is the control command in which n is the argument for selecting which of the paper detectors is to be used for detecting presence or absence of paper. Fig. 6 shows how the argument n is used for selecting a desired paper detector. In this example each of the paper detectors 1, 2 and 3 is assigned a respective one of the bits of the argument n. If the respective bit is "1" the associated paper detector is selected, and if that bit is "0" the paper detector is not selected. This allows all combinations of paper detectors and provides for the possibility of selecting none of the paper detectors to create a condition in which no paper detector appears to be installed in the printer.

Fig. 7 is a table illustrating an example of a control command output from the host computer for the transmission control means. [ESC + c + 1 + n] is the command, wherein n is the argument by which the paper detector is selected that is to detect presence or absence of paper. In a manner similar as in Fig. 6, each paper detector is assigned a respective bit of the argument n. If a respective bit is "1" the associated paper detector is selected, and if that bit is "0" the paper detector is not selected. Again, this allows all combinations of paper detectors including the possibility of selecting none of the paper detectors useful for printer types having no paper detector installed.

It will be clear to those skilled in the art that the above mentioned examples of control commands are based on the well-known software interface EPSON ESC/P for the parallel interface.

Fig. 2 is a block diagram of a circuit where the detector selection means 4, the transmission control means 5 and the stop control means 8 of Fig. 1 are implemented by means of a microcomputer made up of a CPU 24, a ROM 25 and RAM 26. In Fig. 2, 20, 21 and 22 are paper detector switches which, in combination with pullup resistors 23, form the paper detectors 1, 2 and 3 of Fig. 1. In case of a no-paper condition, the respective switch is in an open state to apply a high level input to the CPU 24. It should be noted, that other kinds of paper detectors, for instance optical paper detectors may be used. The microcomputer receives signals from the paper detectors indicating the presence or absence of paper, and control commands from the host computer 7 via the interface 6. The microcomputer selects the paper detectors depending on a received control command, stops the printing operation of the printing mechanism 9 based on the condition of the paper detectors, detects the condition the

paper detectors and notifies the host computer of that condition. ROM 25 stores the programs for deciphering the control commands from the host computer shown in Figs. 6 and 7 and for selecting only the required paper detector, for stopping the printing operation of the printing mechanism 9 based on the condition of the selected paper detector and for notifying the host computer 7 of the condition of the paper detector. RAM 26 stores the flags, ect., required by these programs, as a temporary memory.

Referring now to the flowcharts in Figs. 3, 4 and 5, the operation of the above described paper control device will be explained. When the CPU receives a specific ESCAPE sequence control command (explained before), it will interpret the data following that sequence as an argument for paper detector selection.

As shown in Fig. 3, the detector selection means judges the value of the first bit of the argument n in the control command of either Fig. 6 or Fig. 7 based on the result of deciphering the control command from the host computer (step 30). If the result is "0" the detector selection means sets the paper detector 1 selection flag to "0", which indicates that the paper detector 1 has not been selected (step 31). If the result is "1" the flag is set to "1" (step 32). The detector selection means then judges the second bit (step 33) and sets the paper detector 2 selection flag correspondingly (step 34 or 35). Then the detector selection means judges the third bit (step 36) and sets the paper detector 3 selection flag correspondingly (step 37 or 38).

As shown in Fig. 4, the stop control means judges by the states of the paper detector selection flags on which paper detector to base processing of print stopping.

First the paper detector 1 selection flag is judged (step 40), and if the result is "0" the processing moves to step 42. However, if the result is "1" the condition of paper detector 1 is detected and judged (step 41). If the result is "paper present" the processing moves to step 42, but if the result is "paper absent", than the print stop processing is executed (step 46).

If the processing moves to step 42, the state of the paper detector 2 selection flag is judged, and if the result is "0" the processing moves to step 44. However, if the result is "1" the condition of paper detector 2 is detected and judged (step 43). If the result is "paper present", than the processing moves to step 44. If, however, the result is "paper absent", than the print stop processing is executed (step 46).

If the processing moves to step 44, the state of the paper detector 3 selection flag is judged, and if the result is "0" the processing terminates. However, if the result is "1" the condition of paper detector 3 is detected and judged (step 45). If the result is "paper present", than the processing terminates. Otherwise, if the result is "paper absent" than the print stop processing is executed (step 46).

As shown in Fig. 5, the transmission control means judges by the states of the paper detector selection flags which paper detector's state will be reported to host computer.

The state of the paper detector 1 selection flag is judged in step 50, and if the result "0" the processing moves to step 54. If the result is "1" the condition of paper detector 1 is judged. If the result is "paper present", a "0" is

set in a memory 1 (step 52), but if the result is "paper absent" a "1" is set in memory 1 and the processing moves to step 54.

In step 54 the state of the paper detector 2 selection flag is judged, and if the result is "0" the processing moves to step 58. If the result is "1" the condition of paper detector 2 is judged (step 55). If the result is "paper present" a "0" is set in a memory 2 (step 56), but if the result is "paper absent", a "1" is set in memory 2 (step 57) and the processing moves to step 58.

In step 58 the state of the paper detector 3 selection flag is judged, and if the result "0" the subsequent processing is executed. If the result is "1" the condition of paper detector 3 is judged (step 59). If the result is "paper present", a "0" is set in a memory 3 (step 60), but if the result is "paper absent", a "1" is set in memory 3 (step 61).

When the subsequent processing is executed, the logical OR of memories 1, 2 and 3 is calculated (step 62) and the result is sent to the host computer via the interface (step 63).

The flowcharts of Figs. 3, 4 and 5 are for embodiments with three paper detectors. In case of more than three paper detectors, judgement of control commands and setting of paper detector selection flags is repeated by a number of times corresponding to the number of paper detectors. Following this, the judgment of paper detector selection flags, detection and judgment of the condition of paper detectors and the processing of print stop based on the results are repeated by a number of times corresponding to the number of paper detectors. Further, judgement of paper detector

selection flags and detection of the condition of paper detectors are correspondingly repeated prior to reporting the result to the host computer.

By means of the invention any desired combination of paper detectors that detect the presence or absence of paper in a printer can be selected by control commands from the host computer. This makes it possible to stop printing operation of the printer based only on the condition of the paper detectors required at that time.

Also, the condition of one or more paper detectors can be reported to the host computer using only one single line of a transmission line connected to the host computer, thus reducing costs and facilitating flexible control by the host computer.

Moreover, since the paper detectors required to stop printing and the paper detectors required to notify the host computer can be selected separately, control by the host computer can be further expanded.



THIS SHEET HAS BEEN
REPLACED

CLAIMS:

1. A printer control device for a printer capable of working with multiple types of paper, said control device being connected to a host computer (7) via a transmission line, wherein the control device comprises two or more paper detectors (1, 2, 3) that detect the presence or absence of paper, an interface (6) that receives data from the host computer (7), and a detector selection means (4) that selects only a specified detector among the paper detectors based on a control command from the host computer.

2. A printer control device according to claim 1, comprising stop control means (8) that stops printing based on the condition of the paper detector (1, 2, 3) selected by the detector selection means (4).

3. A printer control device according to claim 1 or 2, comprising transmission control means (5) that transmits the condition of the paper detector (1, 2, 3) selected by the detector selection means (4) to the host computer.

4. A method for controlling a printer having plural paper detectors and being connected to a host computer (7) by means of an interface (6) providing one transmission line for sending a no-paper signal to the host computer, said method comprising the steps of:

a) selecting one or more of said plural paper detectors (1, 2, 3) by a specific control command sent from the host computer (7) to the printer,

b) checking the condition of the or each selected paper detector, and

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

c) performing a print stop process when the or any of the selected paper detectors indicates a no-paper condition.

5. A method according to claim 4, further comprising the steps of:

d) calculating the logical OR of the results of step b), and

e) sending the result of step d) via said one transmission line to the host computer (7).

6. A method for controlling a printer having plural paper detectors (1, 2, 3) and being connected to a host computer (7) by means of an interface (6) providing one transmission line for sending a no-paper signal to the host computer, said method comprising the steps of:

a) selecting one or more of said plural paper detectors by a specific control command sent from the host computer to the printer,

b) checking the condition of the or each selected paper detector,

c) calculating the logical OR of the results of step b), and

d) sending the result of step c) via said one transmission line to the host computer.

This Sheet Has Been Replaced



Abstract of the Disclosure (Fig. 1)**PRINTER CONTROL DEVICE AND METHOD FOR
CONTROLLING A PRINTER**

Disclosed are a printer control device and a method for controlling a printer that are useful for printers capable of working with multiple paper sources and/or multiple types of paper. By means of the invention, any desired combination of paper detectors (1, 2, 3) that detect the presence or absence of paper in a printer can be selected by control commands from the host computer (7). This makes it possible to stop printing operation of the printer based only on the condition of paper detectors required at that time. Also, the condition of one or more paper detectors can be reported to the host computer using only one single line of a transmission line connected to the host computer.

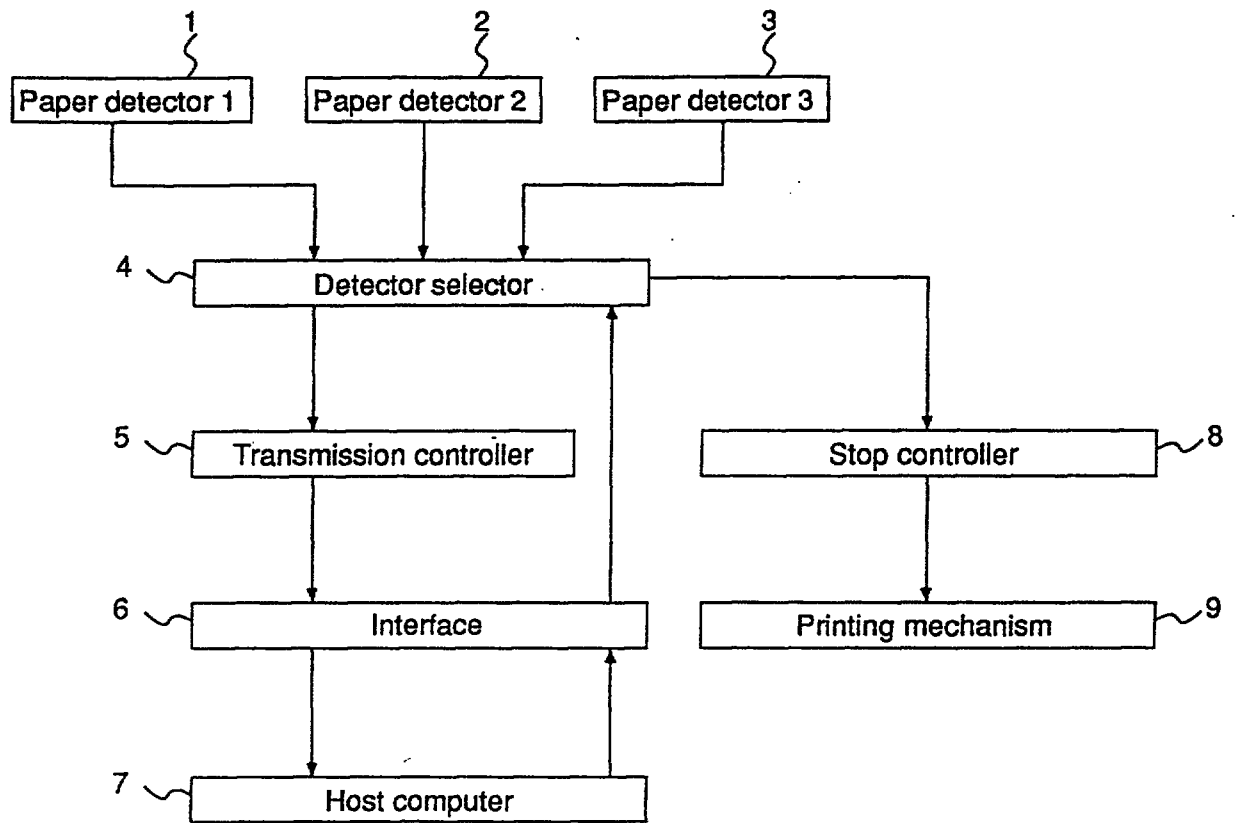


FIG. 1

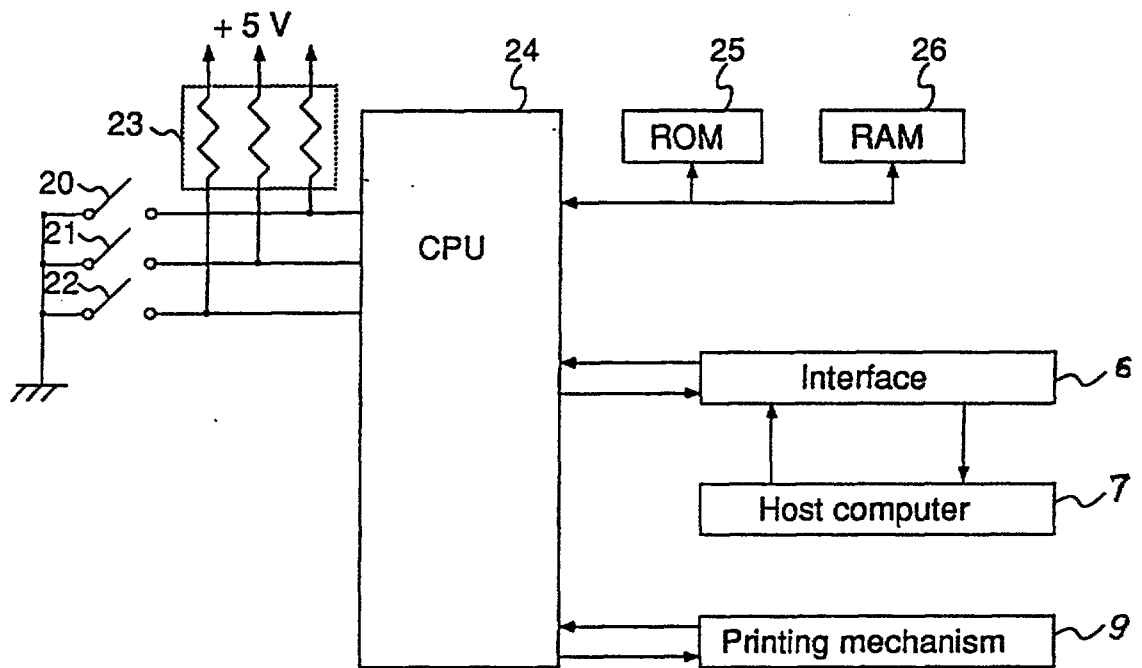


FIG. 2

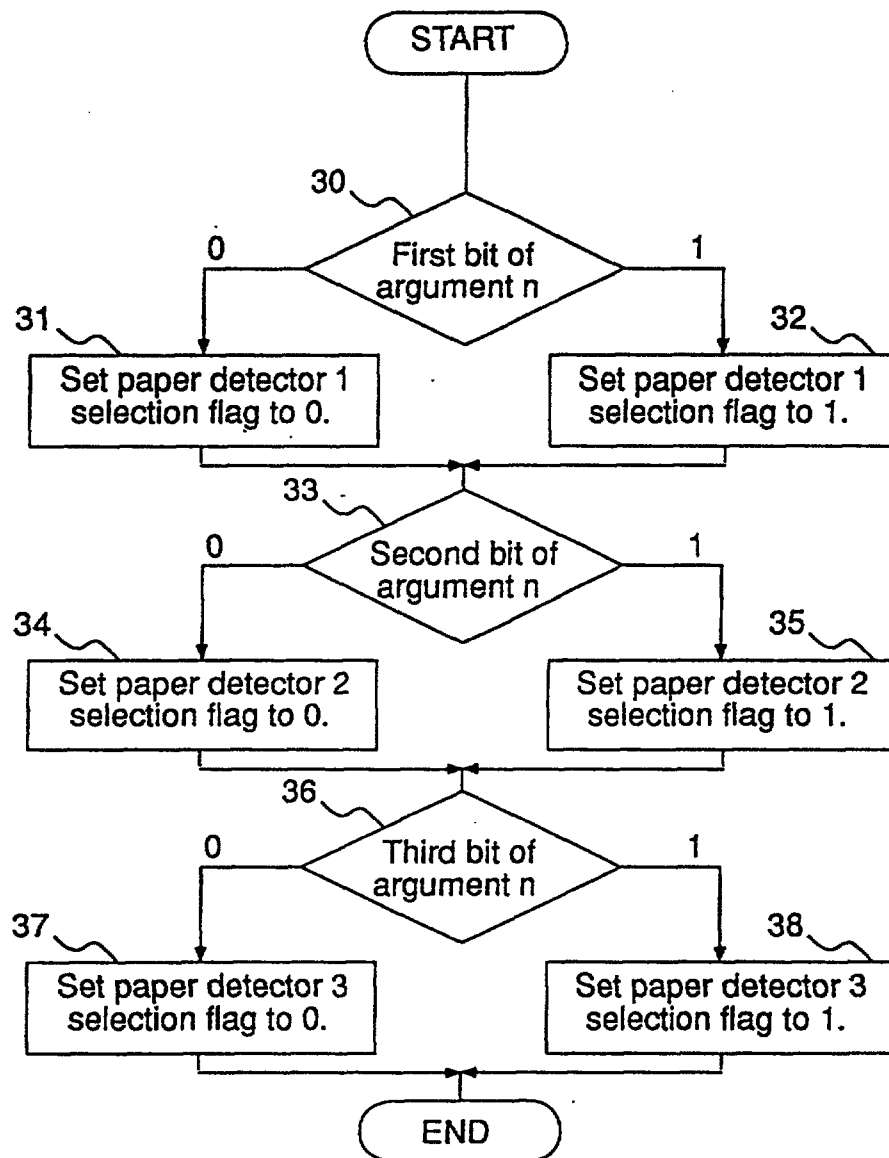


FIG. 3

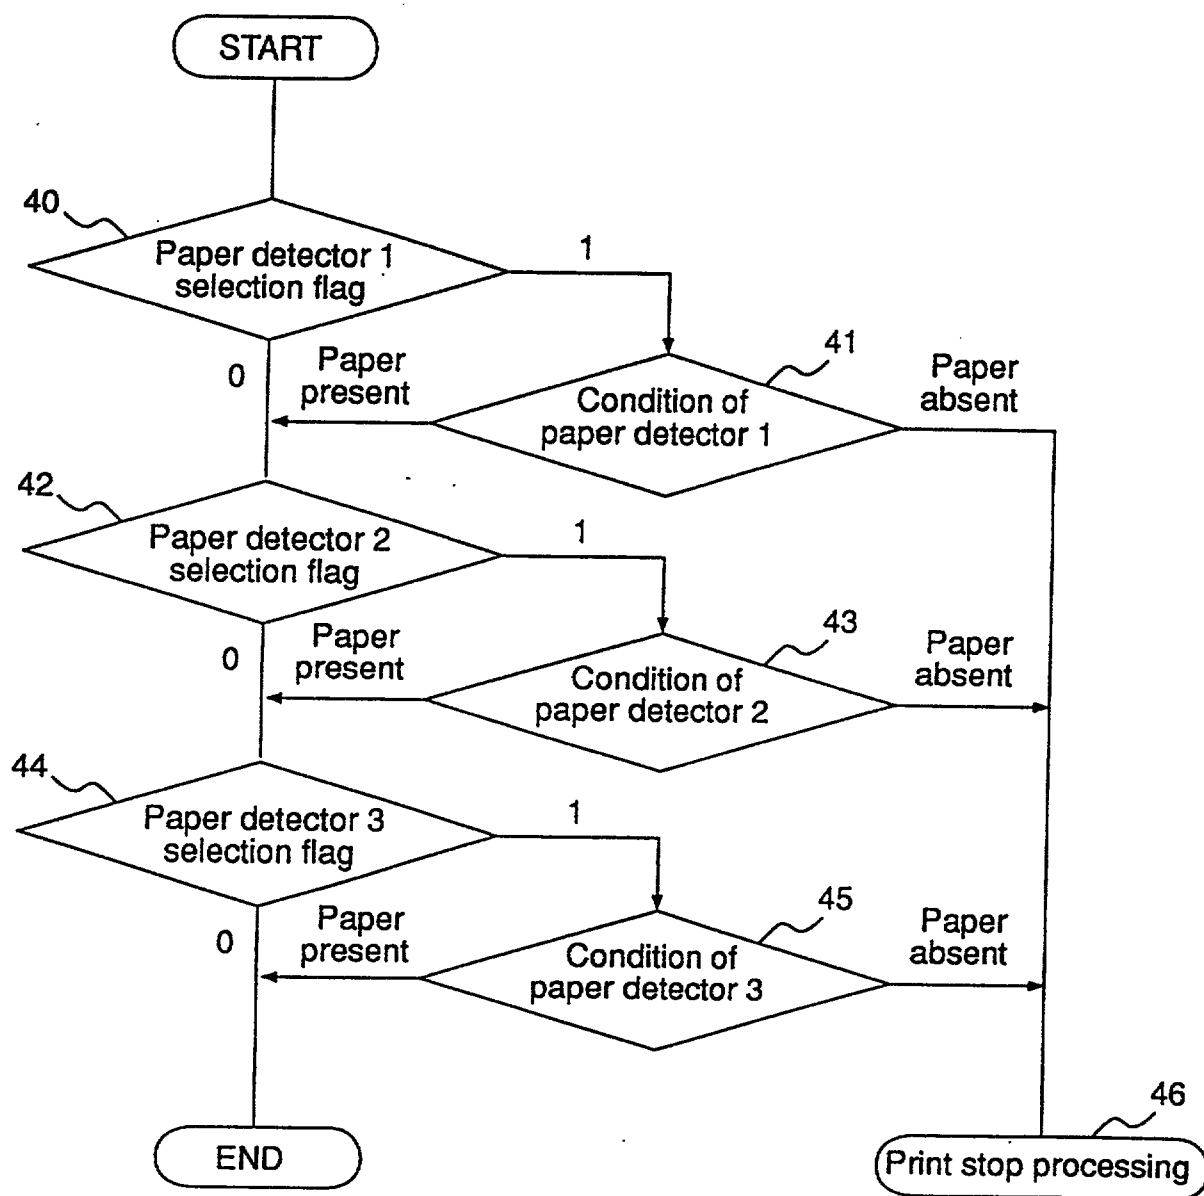


FIG. 4

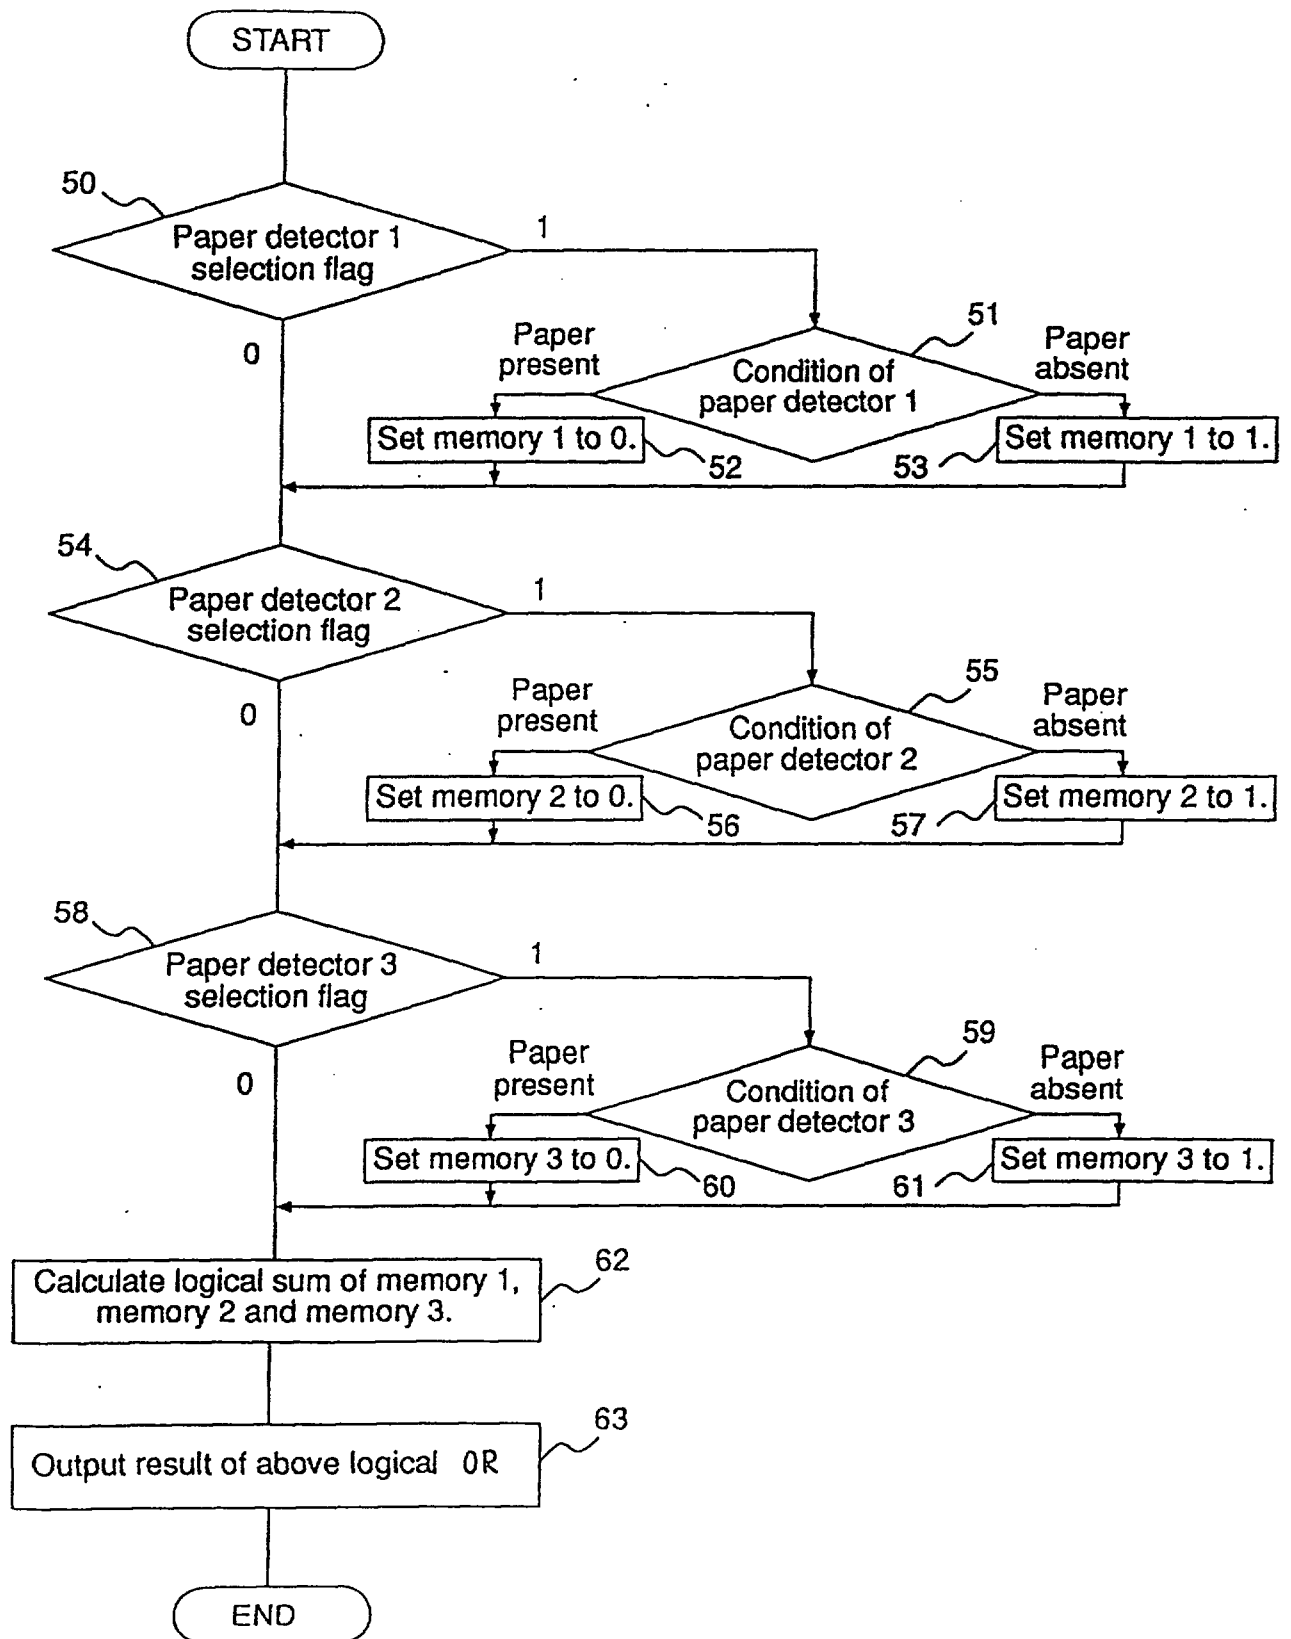


FIG. 5

ESC c 4 n

n	Type of paper detector	Bit value = 0	Bit value = 1
First Bit	Paper detector 1	Do not select	Select
Second Bit	Paper detector 2	Do not select	Select
Third Bit	Paper detector 3	Do not select	Select

FIG. 6

ESC c 1 n

n	Type of paper detector	Bit value = 0	Bit value = 1
First Bit	Paper detector 1	Do not select	Select
Second Bit	Paper detector 2	Do not select	Select
Third Bit	Paper detector 3	Do not select	Select

FIG. 7

25 SEP 2000

CLAIMS:

1. A printer control device for a printer capable of working with multiple types of paper, said control device being connected to a host computer (7) via a transmission line, wherein the control device comprises two or more paper detectors (1, 2, 3) that respectively correspond to said multiple types of paper and detect the presence or absence of corresponding paper, an interface (6) that receives data from the host computer (7), and a detector selector (4) that selects only one or more specified detector among the paper detectors based on a control command received from the host computer.
2. A printer control device according to claim 1, comprising stop control means (8) that stops printing based on the condition of the paper detector (1, 2, 3) selected by the detector selection means (4).
3. A printer control device according to claim 1 or 2, comprising transmission control means (5) that transmits the condition of the paper detector (1, 2, 3) selected by the detector selection means (4) to the host computer.
4. A method of controlling a printer having plural paper detectors which respectively corresponding by plural types of paper handled by the printer and are connected to a host computer (7) by means of an interface (6) providing one transmission line for sending a no-paper signal to the host computer, said method comprising the step of:
 - a. selecting one or more of said plural paper detectors (1, 2, 3) in accordance with a specific control command received from the host computer (7),
 - b. checking the condition of the or each selected paper detector, and

9602500-2
25/9/00

- c. performing a print stop process when the or any of the selected paper detectors indicates a no-paper condition.
5. A method according to claim 4, further comprising the steps of:
- d) calculating the logical OR of the results of step b), and
 - e) sending the result of step d) via said one transmission line to the host computer (7).
6. A method for controlling a printer having plural paper detectors (1, 2, 3) which respectively correspond to plural types of paper handled by the printer and are connected to a host computer (7) by means of an interface (6) providing one transmission line for sending a no-paper signal to the host computer, said method comprising the steps of:
- a) selecting one or more of said plural paper detectors in accordance with a specific control command received from the host computer,
 - b) checking the condition of the or each selected paper detector, and
 - c) calculating the logical OR of the result of step b), and
 - d) sending the result of step c) via said one transmission line to the host computer.

