



(51) International Patent Classification:
B65D 25/28 (2006.01) **B65D 6/28** (2006.01)
B65D 8/18 (2006.01)

(21) International Application Number:
PCT/BR2009/000251

(22) International Filing Date:
12 August 2009 (12.08.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI0802456-1 14 August 2008 (14.08.2008) BR

(71) Applicant (for all designated States except US): **BRASILATA S.A. EMBALAGENS METÁLICAS** [BR/BR];
Rua Robert Bosch, 332 - Barra Funda, 01141-010 São Paulo - SP (BR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ÁLVARES, Antonio Carlos Teixeira** [BR/BR]; Rua Robert Bosch, 332, 01141-010 São Paulo - SP (BR). **CUNHA, Silvério Cândido da** [BR/BR]; Rua Francisco Oscar Karnal, 398 - apt. 604, 95900-000 Lajeado - RS (BR).

(74) Agents: **ARNAUD, Antonio M.P.** et al.; Rua José Bonifácio, 93 - 9th floor, 01003-901 São Paulo - SP (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CLOSURE ARRANGEMENT FOR A CONTAINER IN METAL SHEET

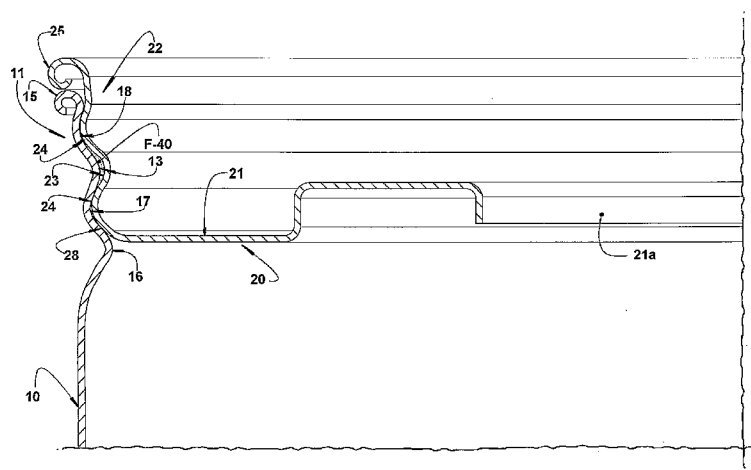


FIG. 3

(57) Abstract: The arrangement is applied to a container which comprises a peripheral side wall (10) having an upper end portion (11) and a lower end portion (12) in which are applied respective end walls (20,30), each comprising a median panel (21,31) and a peripheral skirt (22, 32), one of the upper end portion (11) and lower end portion (12) and the peripheral skirt (22,32) being provided with at least one circumferential rib (13) turned to the other of said parts, the other part being provided with a circumferential groove (23,33) conformed to be fitted onto the circumferential rib (13) upon the fitting of said end wall (20,30) in the interior of one of the upper end portion (11) and lower end portion (12) of the peripheral side wall (10), said circumferential rib (13) and circumferential groove (23,33) forming, therebetween, a circumferential gap (F) in the interior of which is compressed an elastic sealing element (40).

