

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)


PCT

(10) International Publication Number
WO 02/077372 A1

- (51) International Patent Classification⁷: **E02D 5/80**, (71) Applicant and
E21D 21/00 (72) Inventor: **KIM, Kuk-il** [KR/KR]; 110-403 Shinan APT,
Nongzangmaul, 1224 Sawoo-dong, Gimpo-si, 415-733
Gyeonggi-do (KR).
- (21) International Application Number: PCT/KR02/00479
- (22) International Filing Date: 21 March 2002 (21.03.2002) (74) Agent: **JOO, Jong-Ho**; 2nd floor, Sunggok Bldg., 823-22,
Yoksam-dong, Kangnam-gu, 135-080 Seoul (KR).
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|----------------|-------------------------------|----|
| 2001/15335 | 23 March 2001 (23.03.2001) | KR |
| 2001/26495 | 15 May 2001 (15.05.2001) | KR |
| 2001-15539(UM) | 25 May 2001 (25.05.2001) | KR |
| 2001/80184 | 17 December 2001 (17.12.2001) | KR |
| 2001/80183 | 17 December 2001 (17.12.2001) | KR |
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
- (71) Applicant (*for all designated States except US*): **SAM-WOO GEOTECH.CO** [KR/KR]; 257-4, Dangsan-dong 3 Ga, Yeongdeungpo-gu, 150-040 Seoul (KR).

[Continued on next page]

(54) Title: WEDGE ASSEMBLY AND INTERNAL ANCHORAGE USING THE SAME

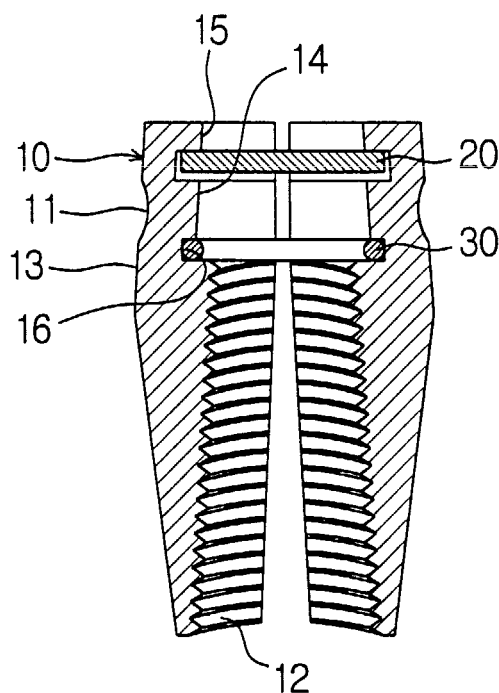

(57) Abstract: A wedge assembly for removing a tension member by the release of the wedge engagement corresponding to the external anchoring of the tension member in imposing the anchoring load on the tension member anchored to the underground anchor hole, an internal anchorage wedge assembly for more simply and efficiently removing the tension member using the aforementioned wedge assembly without any removing equipment such as a drawbench, and an internal anchorage using the wedge assembly are provided.

WO 02/077372 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*