



(51) International Patent Classification:

B65D 43/08 (2006.01) **B65D 41/20** (2006.01)
B65D 41/22 (2006.01) **B65D 43/10** (2006.01)
B65D 45/32 (2006.01)

(21) International Application Number:

PCT/AU2010/001592

(22) International Filing Date:

26 November 2010 (26.11.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009905779	26 November 2009 (26.11.2009)	AU
2010902747	22 June 2010 (22.06.2010)	AU
61/383,625	16 September 2010 (16.09.2010)	US

(72) Inventor; and

(71) Applicant : **DAVID, Albert, John** [AU/AU]; 55 Ali-
cante Street, Minchinbury, New South Wales 2770 (AU).

(74) Agents: **REYNOLDS, Simon, Peter** et al.; Davies Colli-
son Cave, Level 14, 255 Elizabeth Street, Sydney, New
South Wales 2000 (AU).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: STRUCTURE FOR A STORAGE UNIT

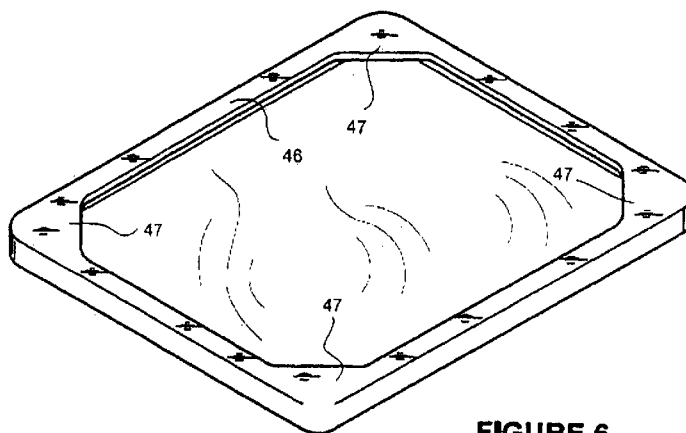


FIGURE 6

(57) Abstract: A structure for substantially sealing a storage unit, wherein the structure includes an elastically stretchable flange cooperable with a lip provided on a rim of the storage unit, wherein the flange is elastically urged to seal against the lip of the storage unit.