

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 May 2007 (18.05.2007)

PCT

(10) International Publication Number
WO 2007/055408 A1

(51) International Patent Classification:

B41J 2/045 (2006.01) **B41J 2/055** (2006.01)
B41J 2/01 (2006.01) **B41J 2/135** (2006.01)

(21) International Application Number:

PCT/JP2006/322900

(22) International Filing Date:

10 November 2006 (10.11.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2005-327318 11 November 2005 (11.11.2005) JP
2006-025042 1 February 2006 (01.02.2006) JP

(71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KAKUDA, Shinichi** [JP/JP]; 38-65, Umegaoka, Aoba-ku, Yokohama-shi, Kanagawa, 2270052 (JP).

(74) Agent: **ITOH, Tadahiko**; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo, 1506032 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID DROP EJECTING HEAD AND IMAGE FORMING APPARATUS, LIQUID DROP EJECTING APPARATUS, RECORDING METHOD

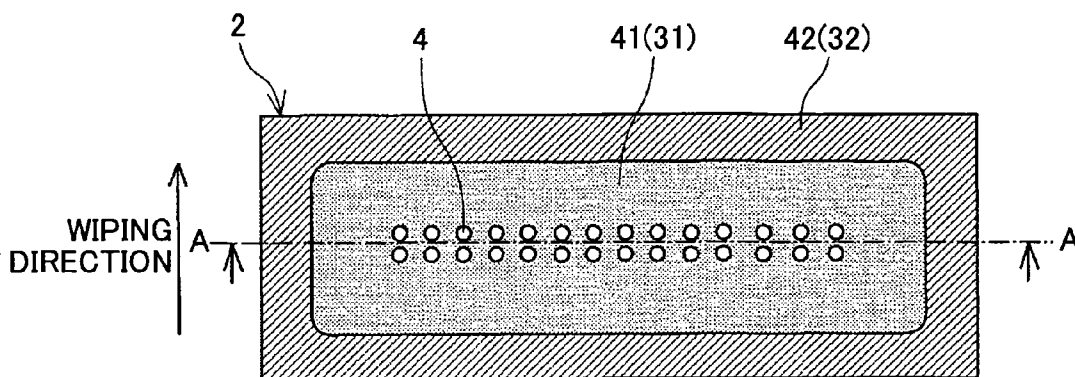

(57) Abstract: Since the same water-repellent process is provided on the nozzle forming part and the outer circumferential part of the nozzle formation member, same process as for the nozzle forming part is needed for the outer circumferential part which is not limited for its structural demand thereby the manufacturing process is complicated and needs high cost. The first water-repellent layer 41 due to the first water-repellent process is formed on the surface of the nozzle forming part 31 formed the nozzle 4 of the surface of the nozzle plate 2, and the second water-repellent layer 42 due to the second water-repellent process different from the first water-repellent process is formed on the surface of the outer circumferential part (outer portion of surface) of the nozzle plate 2. Materials and processes, in which the second water-repellent layer can be formed using simple manufacturing process, can be selected for the second water-repellent process.