
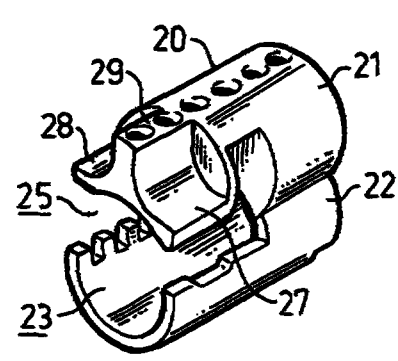


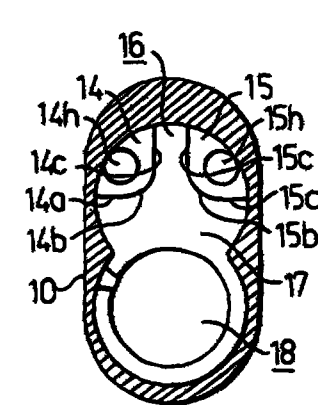

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : E05B 9/06, 9/08, 27/00	A1	(11) International Publication Number: WO 00/43618 (43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/SE00/00130 (22) International Filing Date: 21 January 2000 (21.01.00) (30) Priority Data: 9900193-5 22 January 1999 (22.01.99) SE (71) Applicant (for all designated States except US): WINLOC AG [CH/CH]; P.O. Box 4233, CH-6304 Zug (CH). (72) Inventor; and (75) Inventor/Applicant (for US only): WIDÉN, Bo [SE/SE]; Box 37, S-644 21 Torshälla (SE). (74) Agent: EHRNER & DELMAR PATENTBYRÅ AB; Box 103 16, Gumshornsgatan 7, S-100 55 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: REMOVABLE CORE CYLINDER LOCK		
 		
(57) Abstract A removable core cylinder lock, comprising a casing (10), a lock core (20) with a rotatable key plug (30) in a cylindrical bore (23) and retaining means adapted to releasably retain the lock core in an inserted position in the casing. The casing has two lugs (14, 15) extending radially inwards and being separated transversely from each other, whereas the lock core has two corresponding recesses (27, 28) on both sides of a central, rear portion, whereby the lock core can be fully inserted into said casing. The two lugs are provided with means for fastening the casing to an object.		