




- (51) International Patent Classification:
E21B 23/14 (2006.01)
- (21) International Application Number:
PCT/GB2012/053272
- (22) International Filing Date:
28 December 2012 (28.12.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1122466.4 30 December 2011 (30.12.2011) GB
- (71) Applicant: NATIONAL OILWELL VARCO UK LIMITED [GB/GB]; Martin Street, Audenshaw, Manchester M34 5JA (GB).
- (72) Inventors: JOENSEN, Runi; 3 Meadowlands Avenue, Westhill, Aberdeen AB32 6EH (GB). McLAREN, Christopher; 9D Broomhill Road, Aberdeen, Aberdeenshire AB10 6JA (GB).
- (74) Agent: MURGITROYD & COMPANY; Scotland House, 165-169 Scotland Street, Glasgow, Strathclyde G5 8PL (GB).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: CONNECTOR DEVICE FOR USE IN WIRELINE INTERVENTION OPERATIONS

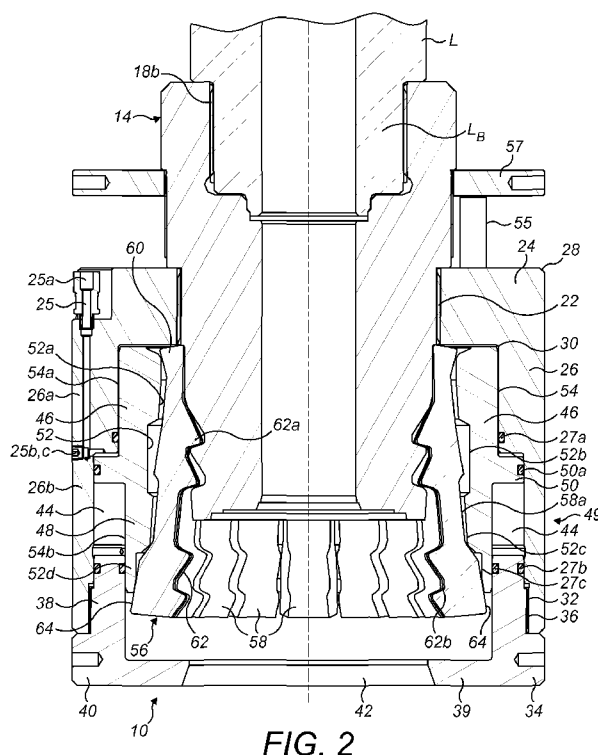

(57) Abstract: A wireline connector device (10) for use in wireline intervention operations comprises a housing (18) connected to a first wireline conduit (L), a piston sleeve (46) located within the housing, and a collet device (60) configured to receive and retain a second wireline conduit, the collet device having a plurality of collet fingers (58) arranged within the piston sleeve, which is movable within the housing to open and close the collet fingers. Optionally a restrictor (57) can be configured to control the movement of the piston sleeve, and can be adjustable to lock the piston sleeve in the second position when the collet fingers are closed around the second wireline conduit. Typically at least one indicator rod (55) projects from the housing, and the piston sleeve engages the indicator rod in the second position.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

27 February 2014