



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶: A62C 31/00, 35/02, 35/62, 39/00	A1	(11) International Publication Number: WO 95/28205 (43) International Publication Date: 26 October 1995 (26.10.95)
(21) International Application Number: PCT/FI95/00216 (22) International Filing Date: 13 April 1995 (13.04.95) (30) Priority Data: 941738 14 April 1994 (14.04.94) FI 941975 28 April 1994 (28.04.94) FI (71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon kuja 4, FIN-04310 Tuusula (FI). (74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, <u>SG</u> , SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i> <i>In English translation (filed in Finnish).</i>	

SG 9611668-6

(54) Title: A FIRE FIGHTING INSTALLATION FOR DISCHARGING A LIQUID-GAS FOG

(57) Abstract

The object of the invention is to provide a novel fire extinguishing installation enabling effective delivery of liquid with immediate effective mixing of gas in the liquid right from the start. This is achieved by connecting to the outlet line (2) of a high-pressure pump (1) having a comparatively small flow a plurality of compressed-gas bottles (4) having the same pressure as the pump (1).

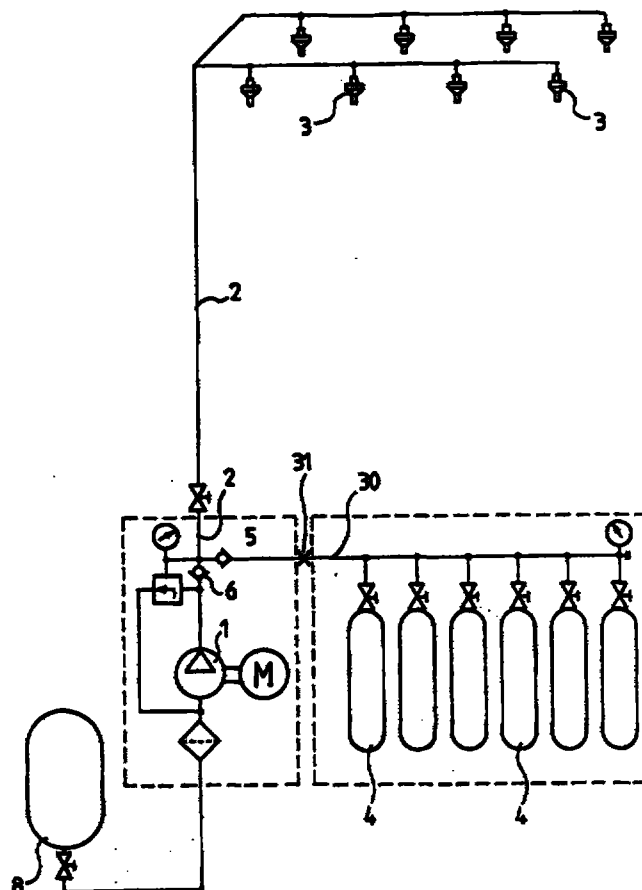

2-3001130

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

96 1 1668 -6

A FIRE FIGHTING INSTALLATION FOR DISCHARGING A LIQUID-GAS FOG

5 The present invention relates to a fire fighting installation comprising a liquid source, a pump connected to said liquid source and preferably having a high liquid pressure and comparatively small flow, and a gas source connected by way of a line to an outlet line of the pump for mixing gas with outbound extinguishing liquid delivered to spray heads.

10 Certain kinds of gasoline fires, for example a kerosene fire in an aircraft jet engine undergoing an engine test in a hangar designed for that purpose, are nearly impossible to extinguish even by means of strong mist-like jets of liquid, as suggested for example in
15 international patent application PCT/FI92/00155. Such a jet engine fire will only go out when the entire hangar, which may typically have a volume of about 3000 cm³, has been subjected to "total flooding", i.e. is in practice entirely filled with liquid mist having
20 very small particles.

The liquid mist can in principle be produced with apparatus as described in international patent application PCT/FI92/00317. In that application, an outgoing ascension tube of a hydraulic accumulator is
25 provided with wall apertures, so that the propellant gas of the accumulator initially drives out liquid only, and after the liquid level has sunk to be even with the uppermost tube wall aperture, mixing of propellant gas into the outbound liquid is gradually
30 started as the liquid level sinks and more tube wall apertures are exposed. In the final stage of emptying the accumulator, it is possible to obtain a liquid mist having sufficiently small droplets for the present purpose, but too large a portion of the liquid
35 contained in the hydraulic accumulator will go waste.



It is an object of the present invention to provide a novel installation enabling effective delivery of liquid with immediate effective mixing of gas into the liquid right from the start. The installation of the invention is primarily characterized in that the gas source is connected to the outlet line of the pump for producing a finely divided liquid mist. The purpose of the gas is to enable fine division of the liquid droplets, which produces a finely divided liquid mist. When the pressure in the line leading to the nozzles is increased, the liquid mist becomes even more finely divided. Preferably, the gas source is arranged to mix gas in the outlet line of the pump with at least substantially the same high pressure as the pump.

The gas source can advantageously be constituted by a plurality of compressed-gas bottles coupled in parallel. The gas may be nitrogen, argon, air, etc. In principle, any suitable gas may be used. The contents of the compressed-gas bottles may be partially in liquid form, depending on the type of gas employed. The charge pressure of the gas bottles, like the operating pressure of the pump, may be approximately 50-200 bar, even though both lower and higher pressures are possible.

A comparatively small pump flow in this context means that the flow is smaller than the flow capacity of the relevant sprinklers or spray heads at maximum operating pressure. The pump flow may be 10-80%, preferably 20-50% of the total flow of extinguishing fluid at maximum operating pressure.

Thus, one can cope with a small pump that is inexpensive and requires little electric power.

In so-called pure oil fires, it is often expedient to mix a foam concentrate with the extinguishing liquid to produce a fire-smothering foam that

This Sheet Has Been Replaced



prevents re-ignition. The hitherto known installations for this purpose have usually been ineffective, as the fire smoke will spoil the foam, that is, prevent the foam concentrate from developing into a foam.

5 The installation in accordance with the present invention enables effective foam formation on account of the comparatively large amount of pure gas, e.g. nitrogen gas, injected concurrently, which will shield the fire smoke from direct contact with the
10 injected foam concentrate.

 In a fire for example on the car deck of a car ferry, also other material than oil, such as wood, cardboard, etc., will burn. To be able to overcome also such fires, in a preferred embodiment of the invention
15 the gas source, preferably a plurality of gas bottles, is arranged at a first stage to empty one or more liquid tanks in order to at least suppress the fire, the gas pressure being so adapted that when the liquid tanks are empty, the gas pressure is at least substantially as high as the operating pressure of the pump.
20 In the following the invention will be described with reference to the accompanying drawing showing two preferred embodiments of the installation in accordance with the invention.

25 Figure 1 shows an embodiment for immediate production of finely divided liquid mist.

 Figure 2 shows an embodiment for initial spraying of liquid and subsequent production of finely divided liquid mist and foam.

30 The embodiment shown in Figure 1 comprises a pump 1, having an outlet line 2 leading to a plurality of spray heads 3. The pump 1 may be a high-pressure pump with a typical operating pressure of 50-200 bar. A plurality of compressed-gas bottles 4 coupled in
35 parallel are connected to the outlet line 2 of the pump

This Sheet Has Been Replaced



via a check valve 5 ensuring that no liquid will enter the compressed-gas bottles 4. A check valve 6 mounted in the outlet line 2 of the pump ensures likewise that the gas will be correctly routed. The compressed-air bottles 4 can be filled with nitrogen. The pressure of the gas in the compressed-gas bottles can suitably be 100-300 bar.

A throttle 31 has been coupled in the line 30 between the compressed-gas bottles and the outlet line 2 of the pump. The purpose of the throttle 31 is to enable adjustment of the mixing ratio of liquid and gas in the extinguishing fluid flowing in the outlet line 2. The throttle 31 is not indispensable. It could be contemplated that the mixing ratio could be adjusted by variously dimensioning the line 30.

In Figure 2, reference numeral 11 denotes a pump aggregate that can comprise for example two 11 kW pumps each having a flow of approximately 50 l/min. and a pressure of approximately 120 bar. An outlet line 12 leads to a plurality of fire zones A-E having respective spray heads or sprinklers 13A-13E. A plurality of compressed-gas bottles 14 and a plurality of liquid tanks 15, with a total of for example 400 litres, are provided for each pump. The compressed gas at an initial pressure of 200 bar, for instance, first forcibly drives out the liquid from the tanks 15 to the respective activated fire zone with a flow of for example 1000 l/min., whereafter the operation is in principle similar as in Figure 1. After the bottles have been emptied of liquid, the pressure in the compressed-gas bottles 14 has decreased to 120 bar, that is, to the pressure of the pump 11. Thereafter the pressure of the pump 11 adjusts itself in accordance with the pressure of the compressed-gas bottles 14, so that the pump flow is 20-100% of the declining total flow of extinguishing

fluid. When there is no gas in the compressed-gas bottles 14 and the gas pressure has decreased to zero, the pump flow is 100% of the total flow of extinguishing fluid.

5 A container for foam concentrate is denoted at 16 and a foam-mixing device at 17. A freshwater tank, for example 3000 litres, is denoted at 18 and a sea-water or lake-water connection is denoted at 19.

10 In the first stage, when the tanks 15 are being emptied of liquid, the effect/action of the pump aggregate 11 is negligible. Valve 20 must be open during said first stage so that no water will enter the foam-mixing device 17 in order to keep said device out of operation, since mixing of foam into the extinguishing fluid must be avoided at the beginning of the
15 extinguishing operation. This is because the foam has a negative effect of making the droplets issuing from the nozzles larger, which will prevent the development of finely divided liquid mist. At the beginning of the
20 extinguishing operation, finely divided liquid mist is specifically wanted. Thus foam will not serve well at the beginning of the extinguishing operation.

 After the tanks 15 are emptied, effective production of finely divided liquid mist can be upheld
25 with the exemplary values given above for about half an hour by using the freshwater tank 18, whereafter sea-water or lake-water can be used if necessary.

 After the fire has been suppressed with water mist, valve 20 can advantageously be shut to supply
30 foam into the extinguishing fluid to produce a thick "foam matting" that will prevent re-ignition. It is to be noted that the installation in accordance with Figure 2 need not comprise a foam-mixing device at all. In practice, valve 20 is shut in such a way that a pressure switch 140 coupled in line 130 is adapted to give
35

a pressure signal after the pressure has decreased under a predetermined level, for example 30 bar. This pressure signal thus controls valve 20.

5 The gas bottles 14 can naturally be alternatively connected to the outlet line 12 to by-pass the liquid tanks 15.

10 The invention has been described in the above by way of examples, and therefore it should be noted that the invention may vary in its details in many ways within the scope of the appended claims. Thus for example the execution of the compressed-gas source may vary. The gas source need not necessarily be constituted by compressed-gas bottles.

This Sheet Has Been Replaced





1. A fire fighting installation comprising a liquid source (8, 18), a pump (1, 11) connected to said liquid source and preferably having a high liquid pressure and comparatively small flow, and a gas source (4, 14) connected by way of a line (30, 130) to an outlet line (2, 12) of the pump for mixing gas with outbound extinguishing liquid delivered to spray heads (3, 13A, 13E, 23), characterized in that the gas source (4, 14) is connected to the outlet line (2, 12) of the pump (1, 11) for producing a finely divided liquid mist.

2. An installation as claimed in claim 1, characterized in that the gas source (4, 14) is adapted to mix gas in the outlet line (2, 12) of the pump (1, 11) with at least substantially the same high pressure as the pump (1, 11).

3. An installation as claimed in claim 1, characterized in that the gas source is constituted by a plurality of compressed-gas bottles (4, 14) coupled in parallel.

4. An installation as claimed in claim 1, characterized in that a throttle (31) has been coupled in the line (30) between the compressed-gas bottles and the outlet line (2) of the pump (1).

5. An installation as claimed in claim 1 or claim 2, characterized in that the initial charge pressure of the gas source (14) is higher than the operating pressure of the pump (11), whereby at least one liquid tank (15) is incorporated between the gas source (14) and the outlet line (12) of the pump (11), the liquid from the tank being arranged to be driven out into the outlet line (12) by propellant gas from the gas source, and that the initial charge



pressure of the gas source and the volume of the liquid tank (15) are adapted to one another so that when the liquid tank (15) has been emptied the pressure of the gas source (14) is at least substantially the same as the operating pressure of the pump (11).

6. An installation as claimed in claim 1 or claim 2, characterized in that the initial charge pressure of the gas source (4, 14) is 100-300 bar and that the flow of the pump (1, 11) is approximately 10-80% of the total flow of extinguishing fluid at maximum operating pressure.

7. An installation as claimed in claim 1, comprising a foam-mixing unit having a foam-mixing source (16) and a foam-mixing apparatus/device (17), characterized in that a pressure switch (140) is coupled in the line (130) leading from the gas source (14) to the outlet line (12) of the pump (11), said pressure switch being adapted to give a pressure signal after the pressure has decreased under a pre-determined level, for example 30 bar, and the pressure signal being adapted to control a valve (20) to effect mixing of foam into the extinguishing liquid.

8. An installation as claimed in claim 7, characterized in that the pressure switch (140) is adapted to shut the valve (20) at said pressure level for mixing foam concentrate into the extinguishing liquid, said valve being adapted to prevent foam concentrate from being mixed with the extinguishing liquid while being open.

1/2

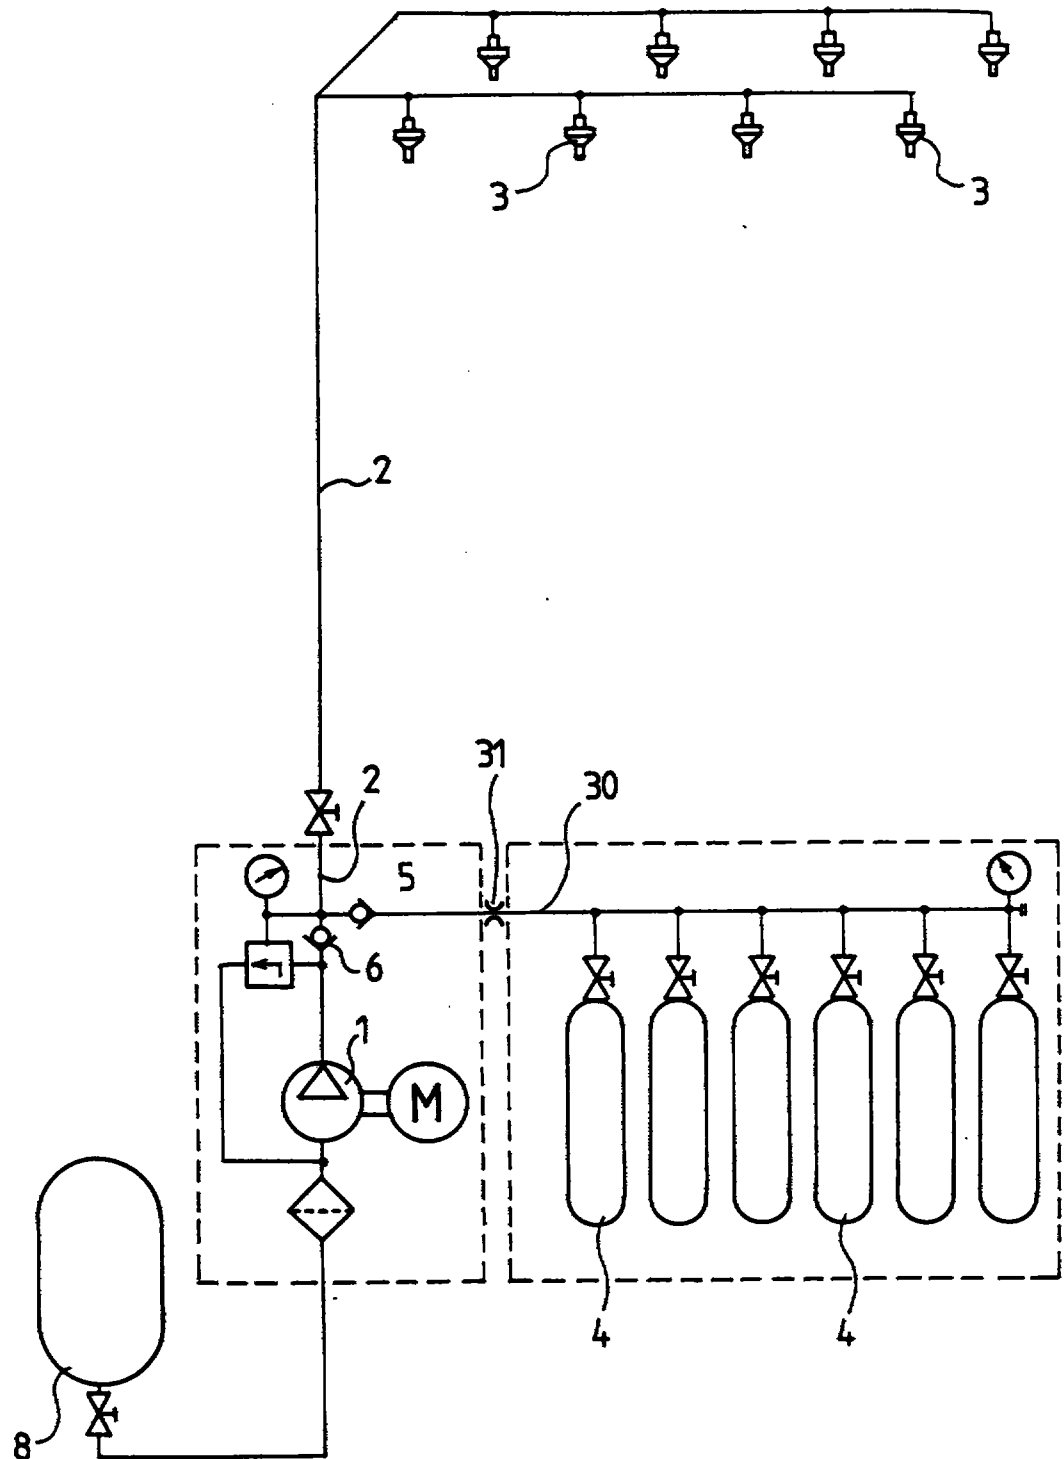


FIG. 1

SUBSTITUTE SHEET

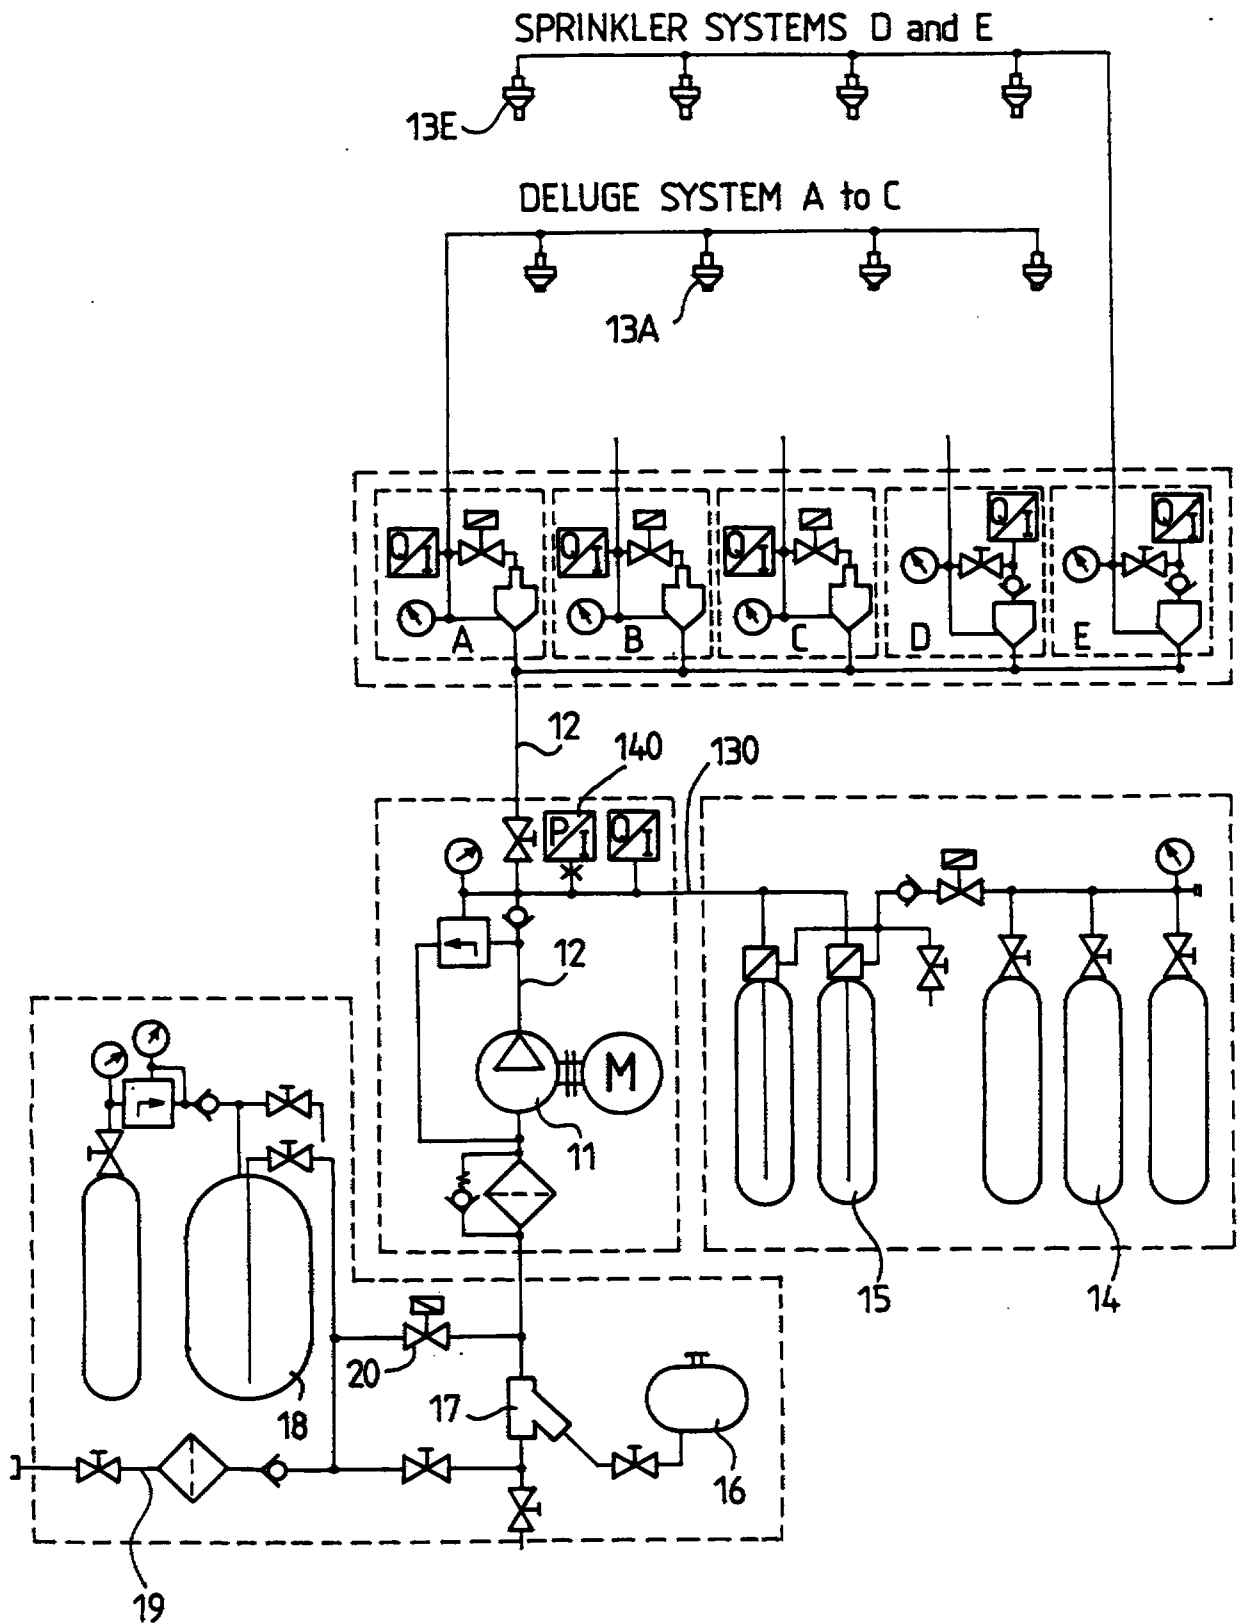


FIG. 2

SUBSTITUTE SHEET

A FIRE FIGHTING INSTALLATION FOR DISCHARGING A LIQUID-GAS FOG

The present invention relates to a fire fighting installation comprising a liquid source, a pump connected to said liquid source and preferably having a high pressure and comparatively small flow, and a gas source connected by way of a line to an outlet line of the pump for mixing gas with outbound extinguishing liquid delivered to spray heads. More specifically the present invention relates to a fire fighting installation according to the first part of attached claim 1.

Certain kinds of gasoline fires, for example a kerosene fire in an aircraft jet engine undergoing an engine test in a hangar designed for that purpose, are nearly impossible to extinguish even by means of strong mist-like jets of liquid, as suggested for example in international patent application PCT/FI92/00155. Such a jet engine fire will only go out when the entire hangar, which may typically have a volume of about 3000 cm³, has been subjected to "total flooding", i.e. is in practice entirely filled with liquid mist having very small particles.

The liquid mist can in principle be produced with apparatus as described in international patent application PCT/FI92/00317. In that application, an outgoing ascension tube of a hydraulic accumulator is provided with wall apertures, so that the propellant gas of the accumulator initially drives out liquid only, and after the liquid level has sunk to be even with the uppermost tube wall aperture, mixing of propellant gas into the outbound liquid is gradually started as the liquid level sinks and more tube wall apertures are exposed. In the final stage of emptying the accumulator, it is possible to obtain a liquid mist having sufficiently small droplets for the present purpose, but too large a portion of the liquid contained in the hydraulic accumulator will go waste.

It is an object of the present invention to provide a novel installation enabling effective delivery of liquid with immediate effective mixing of gas into the liquid right from the start. The installation
5 of the invention is primarily characterized by the features recited in the characterizing portion of attached claim 1.

The purpose of the gas is to enable fine division of the liquid droplets, which produces a finely divided liquid mist.
10 When the pressure in the line leading to the nozzles is increased, the liquid mist becomes even more finely divided. Preferably, the gas source is arranged to mix gas in the outlet line of the pump with at least substantially the same high pressure as the pump, whereby
15 the gas source can advantageously be constituted by a plurality of compressed-gas bottles coupled in parallel. The gas may be nitrogen, argon, air, etc. In principle, any suitable gas may be used. The contents of the compressed-gas bottles may be partially in
20 liquid form, depending on the type of gas employed. The charge pressure of the gas bottles, like the operating pressure of the pump, may be approximately 50-200 bar, even though both lower and higher pressures are possible.

25 A comparatively small pump flow in this context means that the flow is smaller than the flow capacity of the relevant sprinklers or spray heads at maximum operating pressure. The pump flow may be 10-80%, preferably 20-50% of the total flow of extinguishing fluid at maximum operating pressure.
30

Thus, one can cope with a small pump that is inexpensive and requires little electric power.

In so-called pure oil fires, it is often expedient to mix a foam concentrate with the extinguishing liquid to produce a fire-smothering foam that
35

19 SEP 1997
PCT/FD95/00216

WO 95/28205

3

prevents re-ignition. The hitherto known installations for this purpose have usually been ineffective, as the fire smoke will spoil the foam, that is, prevent the foam concentrate from developing into a foam.

5 The installation in accordance with the present invention enables effective foam formation on account of the comparatively large amount of pure gas, e.g. nitrogen gas, injected concurrently, which will shield the fire smoke from direct contact with the
10 injected foam concentrate.

 In a fire for example on the car deck of a car ferry, also other material than oil, such as wood, cardboard, etc., will burn. To be able to overcome also such fires, in a preferred embodiment of the invention
15 the gas source, preferably a plurality of gas bottles, is arranged at a first stage to empty one or more liquid tanks in order to at least suppress the fire, the gas pressure being so adapted that when the liquid
20 tanks are empty, the gas pressure is at least substantially as high as the operating pressure of the pump.

 In the following the invention will be described with reference to the accompanying drawing.

25 Figure 1 shows an installation for immediate production of finely divided liquid mist.

 Figure 2 shows an installation for initial spraying of liquid and subsequent production of finely divided liquid mist and foam.

30 The installation shown in Figure 1 comprises a pump 1, having an outlet line 2 leading to a plurality of spray heads 3. The pump 1 may be a high-pressure pump with a typical operating pressure of 50-200 bar. A plurality of compressed-gas bottles 4 coupled in
35 parallel are connected to the outlet line 2 of the pump

a pressure signal after the pressure has decreased under a predetermined level, for example 30 bar. This pressure signal thus controls valve 20.

5 The gas bottles 14 can naturally be alternatively connected to the outlet line 12 to by-pass the liquid tanks 15.

10 The invention has been described in the above by way example, and therefore it should be noted that the invention may vary in its details in many ways within the scope of the appended claims. Thus for example the execution of the compressed-gas source may vary. The gas source need not necessarily be constituted by compressed-gas bottles.



- 5 NOV 1997

4. An installation as claimed in claim 1 or claim 2, characterized in that the initial charge pressure of the gas source (14) is 100 to 300 bar and that the flow of the pump (11) is approximately 10-80% of the flow of extinguishing fluid at maximum operating pressure.

5. An installation as claimed in claim 1, comprising a foam-mixing unit having a foam-mixing source (16) and a foam-mixing apparatus/device (17), characterized in that a pressure switch (140) is coupled in the line (130) leading from the gas source (14) to the outlet line (12) of the pump (11), said pressure switch being adapted to give a pressure signal after the pressure has decreased under a predetermined level, for example 30 bar, and the pressure signal being adapted to control a valve (20) to effect mixing of foam into the extinguishing liquid.

6. An installation as claimed in claim 5, characterized in that the pressure switch (140) is adapted to shut the valve (20) at said pressure level for mixing foam concentrate into the extinguishing liquid, said valve being adapted to prevent foam concentrate from being mixed with the extinguishing liquid while being open.