

27/08/03
2003046729

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/069861 A1

(51) International Patent Classification: A61F 6/00

(21) International Application Number: PCT/IB02/00673

(22) International Filing Date: 7 March 2002 (07.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2001/1888	7 March 2001 (07.03.2001)	ZA
2001/5149	22 June 2001 (22.06.2001)	ZA
2001/7394	7 September 2001 (07.09.2001)	ZA
2001/8548	18 October 2001 (18.10.2001)	ZA

(71) Applicant and


(72) Inventor: VAN RENSBURG, Willem, Nicolaas
[ZA/ZA]; 88 Charles Hoffe Street, Van Riebeeck Strand,
Melkbosstrand, 7441 Cape Town (ZA).(74) Agent: PLA-PILLANS, Philip, Antonio; Adams &
Adams Cape Town Office, Suite 3203, 32nd Floor, ABSA
Centre, Heerengracht (ZA).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: A CONDOM DONNING DEVICE

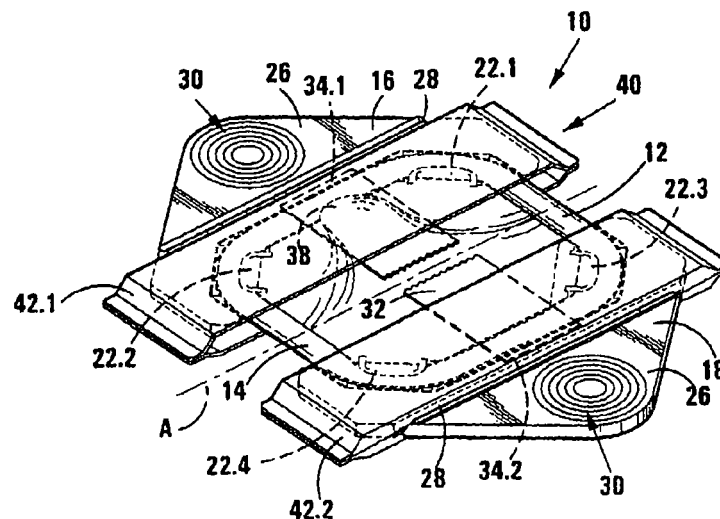

(57) Abstract: A condom donning device (10) adapted for donning a condom (12) having a tubular wall that is rolled up into a hem ring (14) which is defined on the outside of the tubular wall in an initial configuration of the condom. The device (10) comprises two support formations (16) and (18) which together define an internal space through which a penis can extend and a separation axis A along which the support formations are separable. Each support formation defines a pair of hook-like holding formations (22) in which the hem ring of the condom can be received and held in an arrangement permitting unrolling of the hem ring when donning the condom. The invention extends to an assembly including the device (10), the condom (12) and a package in the form of a pouch of packaging film which is hermetically sealed to the support formations so as to form a hermetically sealed enclosure surrounding the condom.

WO 02/069861 A1



162162



ACTION