

SPIN-STABILISED PROJECTILE WITH METAL BAND**Technical Field**

The invention relates to a spin-stabilised projectile, provided with a band, according to the preamble to claim 1. The body of the projectile consists of two main portions
5 which are joined by means of a joint at the stern part of the projectile, where the band is attached to the projectile body. The band is made of a metal alloy which is softer than the material of the projectile body, e.g. a copper alloy.

Prior Art

10

Spin-stabilised projectiles are usually provided with a band of a softer alloy, e.g. copper, for sealing against propellant gases and for imparting a spin to the projectile. When the projectile begins to be advanced through a rifled barrel, grooves are pressed into the band by the rifle ridges which then act as guides for
15 the grooves. As the projectile is accelerated through the bore, the helical rifle ridges force the band and thus the projectile to spin. The indisposition, caused by the spin acceleration, to spinning of the projectile results in great stress between the band and the projectile body. In a conventional fashion, the band is fixed in a groove turned in the projectile body. The band is shrunk by being pressed radially inwards
20 to embossing of the material so as to get a firm grip which is improved by the bottom of the groove being formed with driving flutes, into which the band material is pressed.

Recently, one has begun to use weapons for projectiles acting with kinetic energy.
25 Since this action is dependent on the mass and striking speed of the projectile, these weapons are used together with heavier projectiles and a higher firing speed than in prior-art technique. A higher firing speed is also desired for an increased firing range. Owing to the higher trajectory speed, a higher speed of spinning of the projectile is required for maintained stability. A higher spinning speed is also
30 obtained when older barrels with unchanged rifles are used at an increased firing speed. To make it possible to obtain a higher spinning speed at an unchanged or relatively small increase of the length of the barrel, it is necessary for the spinning of the projectile to accelerate more when driven through the barrel as compared with firing according to earlier technique.

By increasing the mass as well as the spinning acceleration of the projectile, the stresses in the connection between the band and the projectile body, which are caused by the above-mentioned factors, have increased significantly. The stresses
5 have become so great that bands fixed according to prior-art technique have lost their hold and slid in their grooves of the above-mentioned type.

Summary of the Invention

10 Technical problem

The object of the invention is to provide a spin-stabilised projectile with a metal band as mentioned by way of introduction. The projectile has, inter alia, the following properties:

- 15 - improved fixing of the metal band
- rational manufacture of the projectile

Solution

20 This object is achieved by the projectile being given the features as defined in the appended claims.

A metal band usually is of essentially rectangular cross-section. The boundary surface consists of four surfaces: inner and outer surface denominated according to
25 the inner and outer diameter of the metal band as well as front and rear flank surface.

The invention suggests that the metal band be fixed by soldering or brazing to the front main portion of the projectile body. In order to accomplish a sufficiently strong
30 connection, both the inner surface of the metal band and as much as possible of its front flank surface are used for soldering or brazing. These surfaces are fixed to the corresponding receiving surfaces of said front main portion, which are designed as a stepped shoulder extending round the stem of the main portion. This shoulder thus comprises a rearwardly directed flank surface and a substantially cylindrical
35 surface extending astern at least as far as the width of the inner surface of the metal band. If the main portion extends further astern than the latter cylindrical

surface, the protruding part does not have greater dimensions than to allow the metal band to be slipped onto this part up to the cylindrical surface.

Like in the alternative embodiment, this protruding part can be arranged with means
5 for the joint of the type as will be mentioned below.

In the soldering or brazing operation, the band is arranged against this shoulder so as to form a slot having a suitable thickness, about 0.2 mm, between the surfaces. As a result, the fixing with, for instance, silver fillers as brazing material will be
10 strong. The soldering or brazing is preferably carried out in such a manner that in any case the rear part of the entire front main portion is heated to the melting temperature of the soldering or brazing material.

According to the invention, it is also suggested that the projectile body be arranged
15 such that, in the assembled state thereof, the rear main portion is arranged to extend into abutment against the rear flank surface of the band, or at least to the vicinity thereof at a diameter which essentially corresponds to the diameter of the circumferential surface of the projectile. This can be carried out, for instance, by the rear main portion being provided with a forwardly directed annular flank surface
20 having an outer diameter which essentially corresponds to the diameter of the shell of the projectile and which, at least in its outer annular part, is positioned, when the body is assembled, so as to abut against or in the vicinity of the rear flank surface of the band. This eliminates any unnecessary air resistance caused by the band.

25 The main portions are connected to each other by means of, for instance, a threaded joint, an overlap joint or fixing screws, for instance directed forwards from the stem. An overlap joint usually comprises a tubular part of the front or rear main portion. This tubular part is inserted with a fit inside a likewise tubular part of the other main portion. A joint may comprise some sort of guide means against
30 spinning, e.g. splines together with break pins for locking in the axial direction. The main portions can also be soldered or brazed together. This joining can then be effected while the band is soldered or brazed on. The joining means can be comprised in the projectile ahead of the band inside this like in the preferred embodiment, or behind this like in the alternative embodiment.

35

Advantages

- The fixing of the band withstands high loads, by the band having a large fixing surface to the projectile body and by this surface being partly arranged transversely of the direction of the pressure exerted by propellant gases on the rear flank surface of the band. This prevents this part of the fixing surface from being
5 subjected to the shear stress that is caused by the propellant gases on cylindrical fixing surfaces and that is added to the shear stress caused by the above-mentioned indisposition to spinning of the projectile.
- The band is fixed to the heaviest main portion of the projectile, which is favourable from the point of view of strength.
- 10 - The band can be finished before being fixed. When fixing in prior-art manner, the band must be machined after being fixed by pressing, for instance by turning.
- The projectile body is not subjected to the pressure arising if the band is fixed by pressing, which may complicate the manufacture especially of hollow projectile bodies. Nor is the projectile body subjected to local overheating like in resistance
15 welding, which is detrimental from the point of view of strength.

Description of the Figures

20 A preferred embodiment will now be described in more detail with reference to the accompanying Figures, in which the reference numerals designate corresponding parts in both Figures.

Fig. 1 is a longitudinal section of the rear part of a projectile body with a fixed band.

25 Fig. 2 is a longitudinal section of the rear part of an alternative embodiment of a projectile body with a fixed band.

Preferred Embodiment

30 Fig. 1 illustrates the rear part of a load-carrying projectile comprising a hollow projectile body of forged steel, which is divided into a front main portion 1 and a rear main portion 2. The main portions are joined by means of a threaded joint 3, but could also be joined by means of, for instance, an overlap joint. A band 4 of a copper alloy is arranged on the projectile body in connection with the joint between the main portions.

35 A stepped shoulder is formed in the end of the front main portion. The shoulder consists of an annular flat flank surface 5 and a cylindrical surface 6, with a fillet in

the transition between the surfaces. The band 4 is fixed by means of a brazing solder 7, such as a silver filler, to these surfaces. The band has an inner cylindrical surface 8 having a diameter exceeding that of the cylindrical surface 6 of the shoulder to such an extent that a brazing slot of 0.2-0.3 mm is obtained. The slot
5 can be kept in the brazing operation by means of a brazing fixture or by the brazing surfaces of the band being provided, during manufacture of the band, with knobs, small projections. The cylindrical surface 6 of the shoulder is made so long that the abruptly cut-off, annular end face 9 of the front main portion and the flat annular rear flank 10 of the band reach astern to the same extent when the band has been
10 brazed on. By means of, for instance, knobs, a brazing slot is obtained also between the flank surface 5 of the shoulder and the front flank 11 of the band.

The rear main portion is formed with an annular flat flank surface 12, whose outer diameter is slightly smaller than that of the flat flank surface 5 of the shoulder, and
15 with a threaded cylinder 13 which is directed forwards from the area inside the flank surface and whose thread matches an inner thread formed in the end of the front main portion to constitute the threaded joint 3. After joining of the two main portions, the flank surface 12 of the rear main portion abuts against the end face 9 of the front main portion as well as the rear flank 10 of the band. This design results in a
20 very strong fixing of the band and an area, reinforced by the threaded joint inside the band, of a projectile body portion which is subjected to great stresses. These stresses arise, for instance, when the grooves are pressed into the band in the firing of the projectile.

25 Fig. 2 illustrates the rear part of an alternative projectile body which is also divided into a front main portion 1 and a rear main portion 2. The main portions are joined by means of an overlap joint 14, locked by a number of breakable pins 15. The projectile can be used, for instance, as carrier of subwarheads, which are discharged in flight from the front main portion 1 after blasting away of the rear
30 main portion 2. A band 4 is fixed by brazing to the front main portion in the same fashion as in the main embodiment.

**Claims**

1. A spin-stabilised projectile comprising a band (4) of a metal alloy and a projectile
5 body which is divided into a front main portion (1) and a rear main portion (2), the
main portions being joined at the stern part of the projectile by means of a joint (3),
c h a r a c t e r i s e d in that the band (4) is soldered or brazed with its inner
surface and its front flank surface onto a substantially cylindrical surface (6) and a
rearwardly directed annular flank surface (5) of a stepped shoulder which is formed
10 in the stern of the front main portion and which extends round the projectile body,
and that the front main portion is designed in such a manner that the band can be
slipped onto the shoulder in a design suitable for said soldering or brazing.
2. The spin-stabilised projectile as claimed in claim 1, c h a r a c t e r i s e d
15 in that the rear main portion is provided with a forwardly directed annular flank sur-
face (12), which extends up to the rear flank surface (10) of the band and which has
an outer diameter corresponding to that of the flank surface (5) of the shoulder.
3. The spin-stabilised projectile as claimed in claim 1 or 2, c h a r a c t e r -
20 i s e d in that the front main portion (1) is terminated in an end face (9) which
reaches as far astern as the rear flank surface (10) of the band.
4. The spin-stabilised projectile as claimed in any one of the preceding claims,
c h a r a c t e r i s e d in that the joint is a threaded joint (3).
25
5. The spin-stabilised projectile as claimed in any one of the preceding claims,
c h a r a c t e r i s e d in that the joint is an overlap joint (14).
6. The spin-stabilised projectile as claimed in any one of the preceding claims,
30 c h a r a c t e r i s e d in that the joint is located inside the band (Fig. 1).

1/1

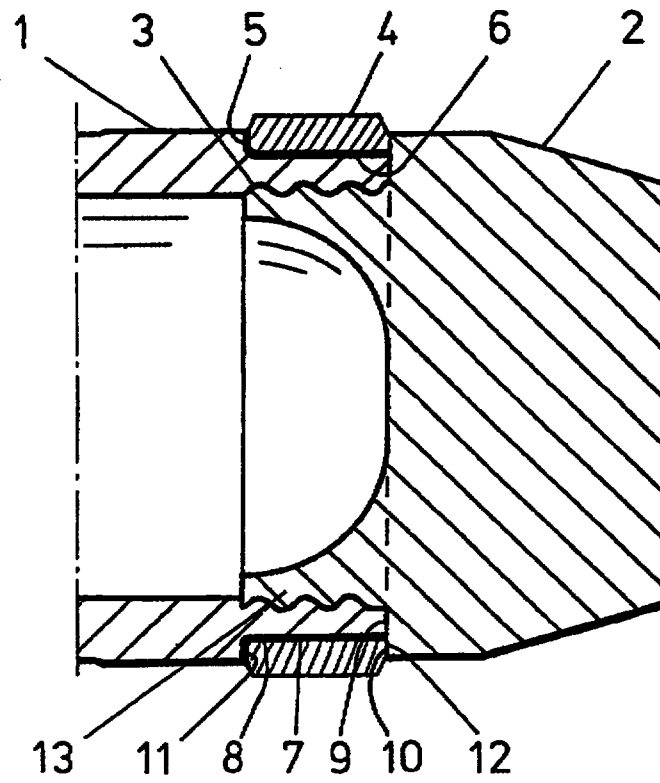


FIG 1

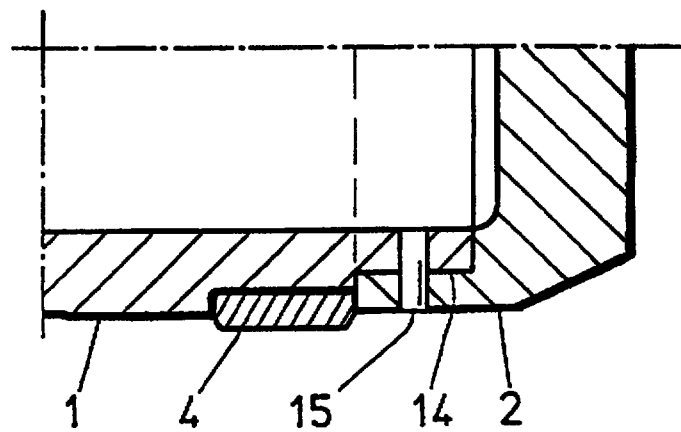


FIG 2

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: F42B 14/02	A1	(11) International Publication Number: WO 97/13113 (43) International Publication Date: 10 April 1997 (10.04.97)
(21) International Application Number: PCT/SE96/01258 (22) International Filing Date: 3 October 1996 (03.10.96) (30) Priority Data: 9503423-7 3 October 1995 (03.10.95) SE (71) Applicant (for all designated States except US): FÖRSVARETS FORSKNINGSANSTALT [SE/SE]; S-172 90 Stockholm (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): NILSSON, Yngve [SE/SE]; Mariefredsvägen 2c, S-645 31 Strängnäs (SE). (74) Agent: FÖRSVARETS MATERIELVERK; Patentenheten, S- 115 88 Stockholm (SE).		(81) Designated States: CN, IL, JP, KR, SG, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).</i>

(54) Title: SPIN STABILIZED PROJECTILE WITH METAL BAND**(57) Abstract**

The invention concerns a spin-stabilised projectile provided with a metal band (4). The projectile comprises a projectile body divided into a front main portion (1) and a rear main portion (2). The main portions are joined at the stern part of the projectile by means of a joint (3). The band is soldered or brazed with its inner surface and front flank surface onto an essentially cylindrical surface (6) and a rearwardly directed annular flank surface (5) of a shoulder which is formed in the rear end of the front main portion and extends round the projectile and which preferably has a length which is the same as the width of the band.

