(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/04885 A1

(51) International Patent Classification[7]: G11B 7/125, 7/006

(21) International Application Number: PCT/EP00/06168

(22) International Filing Date: 30 June 2000 (30.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99202211.1 7 July 1999 (07.07.1999) EP

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors: TIEKE, Benno; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BLOM, Paulus, W., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: FAESSEN, Louis, M., H.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR RECORDING MARKS IN AN INFORMATION LAYER OF AN OPTICAL RECORD CARRIER

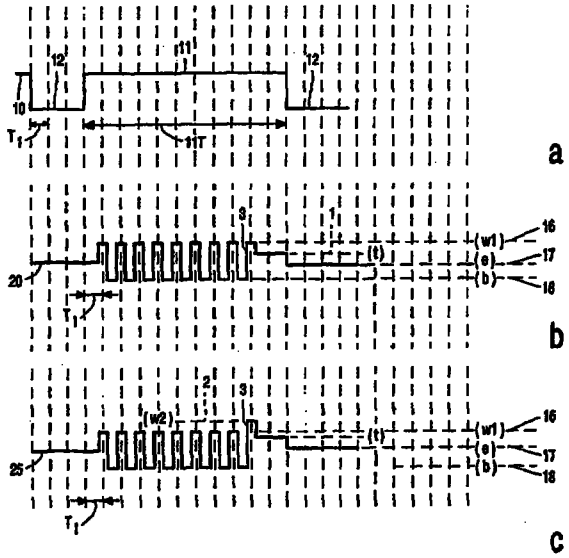

(57) Abstract: A method and device are described for writing an optical record carrier, in which a mark representing recorded data is written in a phase change layer of a record carrier by a sequence of radiation pulses. A trailing power level (t) having a value higher than the erase power level (e) is introduced after a last write pulse (3) in a sequence. Additionally, the power level of the last write pulse (3) in a sequence may be raised. This results in a reduced jitter of the marks written, especially when writing at high recording speeds.

WO 01/04885 A1