

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/27610 A3

(51) International Patent Classification⁷: G01N 22/00,
33/543

(21) International Application Number: PCT/US00/28491

(22) International Filing Date: 13 October 2000 (13.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/159,175 13 October 1999 (13.10.1999) US
60/191,702 23 March 2000 (23.03.2000) US

(71) Applicant: SIGNATURE BIOSCIENCE, INC.
[US/US]; 21124 Cabot Boulevard, Hayward, CA
94545-1130 (US).

(72) Inventors: CHAPMAN, Robert, G.; Apartment 10, 1721
Marco Polo Way, Burlingame, CA 94010 (US). HEFTI,

John, J.; 21 Escondido Avenue, San Francisco, CA 94132
(US). BARTELL, Barrett, J.; 106 West Avalon Drive,
Pacifica, CA 94044 (US). RHODES, Mark, A.; 735 Sap-
phire Street, Redwood City, CA 94061 (US). ZHAO, Min;
651 Catamaran Street, Foster City, CA 94404 (US).


(74) Agents: NEELEY, Richard, L. et al.; Signature Bio-
Science, Inc., 21124 Cabot Boulevard, Hayward, CA
94545-1130 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR DETECTING AND IDENTIFYING MOLECULAR EVENTS IN A TEST SAMPLE

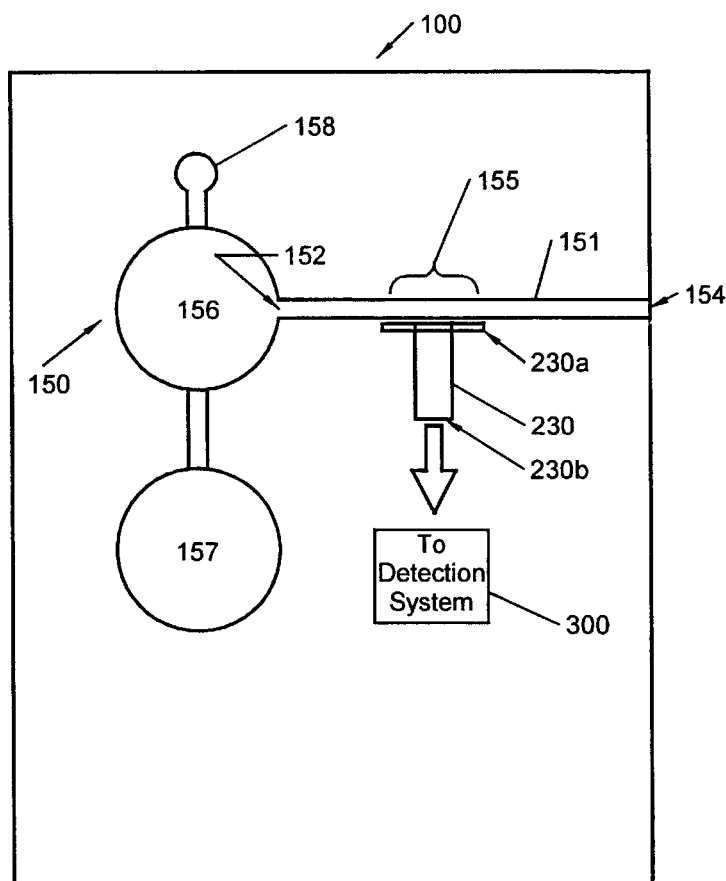

(57) Abstract: A molecular detection system for detecting the presence or absence of a molecular event within a test sample includes a fluid reservoir, a signal source, a measurement probe, and a signal detector. The measurement probe includes a probe head and a connecting end. The probe head is configured to electromagnetically couple an incident test signal to the test sample within the detection region of the fluid reservoir. The interaction of the incident test signal with the test sample produces a modulated test signal, at least a portion of which the probe head is configured to recover. The system further includes a signal detector that is coupled to the connecting end of the measurement probe and configured to recover the modulated test signal.

WO 01/27610 A3



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:

28 March 2002

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.