

(51) International Patent Classification:
C10J 3/54 (2006.01)

(21) International Application Number:

PCT/US2013/049566

(22) International Filing Date:

8 July 2013 (08.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/669,451

9 July 2012 (09.07.2012)

US

(71) Applicant: SOUTHERN COMPANY [US/US]; 600 North 18th Street, Bin 7n-8374, Birmingham, AL 35203-2206 (US).

(72) Inventors: LIU, Guohai; 1248 Eagle Park Road, Birmingham, AL 35242 (US). VIMALCHAND, Pannalal; 689 Highland Lakes Cove, Birmingham, AL 35242 (US). PENG, Wanwang; 944 Talon Way, Birmingham, AL 35242 (US).

(74) Agent: SCHNEIDER, Ryan, A.; Troutman Sanders LLP, Bank Of America Plaza, 600 Peachtree Street, Ne, Suite 5200, Atlanta, GA 30308-2216 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: GASIFICATION OF HIGH ASH, HIGH ASH FUSION TEMPERATURE BITUMINOUS COALS

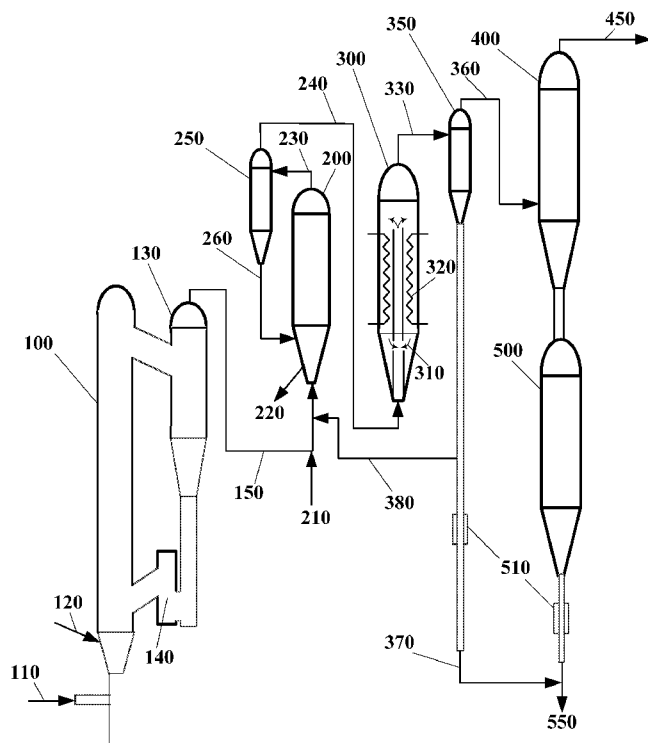


Fig. 2

(57) Abstract: This invention relates to gasification of high ash bituminous coals that have high ash fusion temperatures. The ash content can be in 15 to 45 weight percent range and ash fusion temperatures can be in 1150°C to 1500°C range as well as in excess of 1500°C. In a preferred embodiment, such coals are dealt with a two stage gasification process - a relatively low temperature primary gasification step in a circulating fluidized bed transport gasifier followed by a high temperature partial oxidation step of residual char carbon and small quantities of tar. The system to process such coals further includes an internally circulating fluidized bed to effectively cool the high temperature syngas with the aid of an inert media and without the syngas contacting the heat transfer surfaces.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, (88) Date of publication of the international search report:
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, 6 March 2014
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))