



(43) International Publication Date
29 January 2015 (29.01.2015)

- (51) International Patent Classification:
F16B 2/12 (2006.01) *F16B 5/00* (2006.01)
- (21) International Application Number:
PCT/IB2014/063087
- (22) International Filing Date:
14 July 2014 (14.07.2014)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
MI2013A 001256 26 July 2013 (26.07.2013) IT
- (71) Applicant: METAL WORK S.P.A. [IT/IT]; Via Segni,
5/7/9, I-25062 Concesio (BS) (IT).
- (72) Inventor: TAMIOZZO, Corrado; Via Ghidoni, 15, I-
25124 Brescia (BS) (IT).
- (74) Agent: COSENZA, Simona; c/o BARZANO' &
ZANARDO MILANO S.P.A., Via Borgonuovo, 10, I-
20121 Milano (IT).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONNECTION ARRANGEMENT OF TWO BODIES WITH A REMOVABLE CLAMP

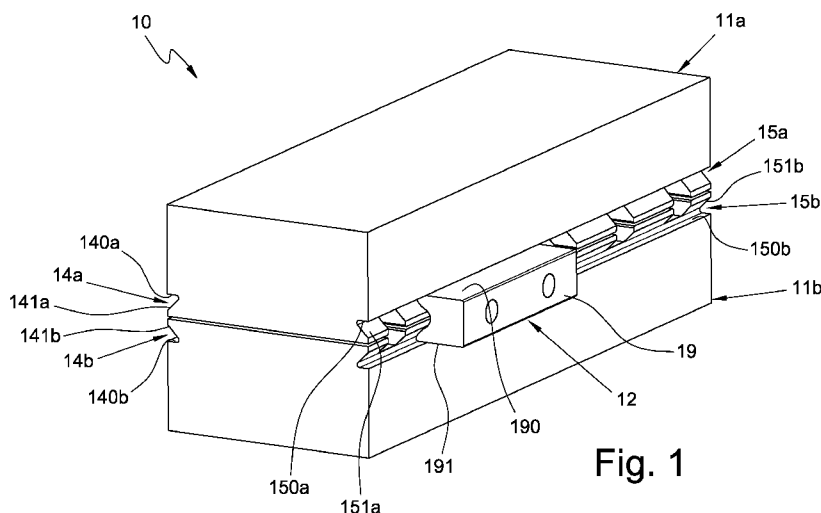


Fig. 1

(57) Abstract: A connection arrangement (10) comprising at least two bodies (11a, 11b) of components to be connected to each other and a constraining group (12) for constraining two bodies (11a, 11b) to each other in a removable manner. When the two bodies (11a, 11b) are in the connection configuration to each other, a recess (14, 15) of one of them defines with a corresponding recess (14a, 15a; 14b, 15b) of the other one a respective coupling seat with the constraining group (12), comprising at least one pair of locking clamps (18, 19) insertable into a respective coupling seat. When the two bodies are in the connection configuration to each other, they are spaced from each other so that their faces (13a, 13b) do not have portions in mutual contact with each other.