



(51) International Patent Classification:
E05B 73/00 (2006.01) *G08B 13/00* (2006.01)

(21) International Application Number:
PCT/SG2012/000373

(22) International Filing Date:
5 October 2012 (05.10.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **RACER TECHNOLOGY PTE. LTD.**
[SG/SG]; No. 28, Changi South Street 1, Singapore
486772 (SG).

(72) Inventors: **KOH, Kee Joo, Willy**; c/o RACER TECHNOLOGY PTE. LTD., No. 28, Changi South Street 1, Singapore 486772 (SG). **LIM, Chee Kean**; c/o RACER TECHNOLOGY PTE. LTD., No. 28, Changi South Street 1, Singapore 486772 (SG). **CHEW, Kia Boon**; c/o RACER TECHNOLOGY PTE. LTD., No. 28, Changi South Street 1, Singapore 486772 (SG).

(74) Agent: **ONG, Kheng Lu, Lucille Frances**; Marks & Clerk Singapore LLP, Tanjong Pagar, P.O.Box 636, Singapore 910816 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: A SECURITY DEVICE

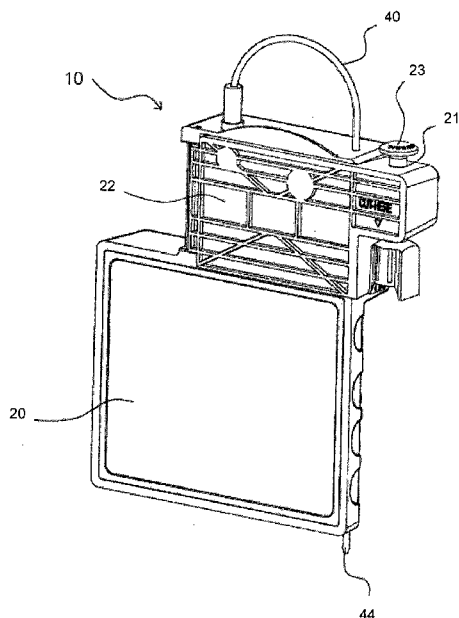


FIG. 3

(57) Abstract: A security device for securing an item, the security device comprising a housing configured to house a circuit board comprising electronics configured to send a telecommunication signal to a receiver when the electronics is activated; a cable configured to establish a conductive path with the circuit board when the housing is closed, thereby activating the electronics; a lock assembly configured to be activated when the housing is closed; and a cover configured to close the housing, the cover having a first pin configured to engage a first end of the cable to prevent removal of a first end of the cable from the housing when housing is closed, and the cover having a second pin configured to activate the lock assembly to prevent removal of a second end of the cable from the housing when the housing is closed.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*