



(51) International Patent Classification:

A45B 1/00 (2006.01) F16H 25/20 (2006.01)  
A45B 7/00 (2006.01) A45B 5/00 (2006.01)  
A61H 3/06 (2006.01) A61H 3/02 (2006.01)  
A45B 3/00 (2006.01) F16M 13/08 (2006.01)  
A45B 9/00 (2006.01)

(21) International Application Number:

PCT/AU2009/000765

(22) International Filing Date:

16 June 2009 (16.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2008903052 16 June 2008 (16.06.2008) AU

(71) Applicants and

(72) Inventors: EVANS, Chad, Arthur [AU/AU]; Unit 5, 58  
The Esplanade, Semaphore, South Australia 5019 (AU).  
DREW, Warren, Phillip [AU/AU]; 100 Broad Arrow  
Road, Narwee, New South Wales 2209 (AU).

(74) Agents: SMEETON, Anthony Richard et al.; Davies  
Collison Cave, Level 14, 255 Elizabeth Street, Sydney,  
New South Wales 2000 (AU).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,  
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,  
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,  
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),  
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,  
MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LINEARLY ADJUSTABLE DEVICE

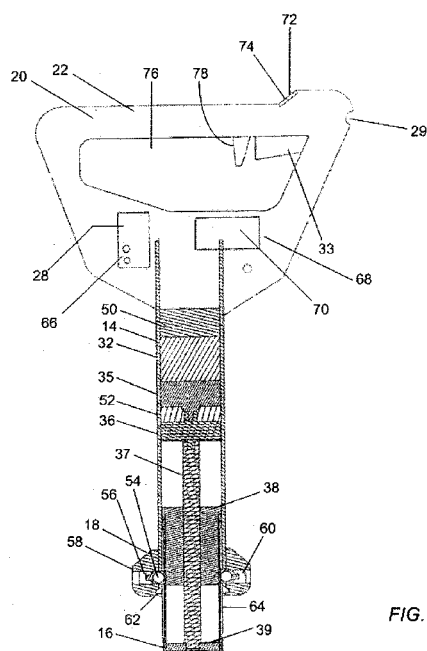


FIG. 3

(57) Abstract: A linearly adjustable device comprising a main body including at least two body sections each having a longitudinal axis, and a linear actuator. The sections are operatively connected together for linear movement relative to one another in the axial direction. The linear actuator is operatively mounted to the main body for causing the relative axial movement between the body section. The linear actuator includes a drive and a power transmission mechanism operatively connected to the drive. The transmission mechanism includes an elongated threaded member operatively connected to one of the body sections and a cooperating threaded member operatively connected to another of the body sections such that relative rotation between the elongated threaded member and the cooperating threaded member causes relative movement of the body sections.