(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
7 June 2012 (07.06.2012)

WIPO | PCT

(10) International Publication Number
WO 2012/072336 A1

(51) International Patent Classification:
*A47C 20/04* (2006.01)

(21) International Application Number:
PCT/EP2011/068448

(22) International Filing Date:
21 October 2011 (21.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10193117.8 30 November 2010 (30.11.2010) EP

(72) Inventor; and
(71) Applicant : **VIBERG, Michael** [SE/SE]; Kyrkogatan 17, S-735 32 Surahammar (SE).

(74) Agent: **REYIER, Ann-Mari**; Bjerkéns Patentbyrå KB, Box 128, S-721 05 Västerås (SE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published**:

— *with international search report (Art. 21(3))*

(54) Title: A DEVICE FOR ADJUSTING FURNITURE

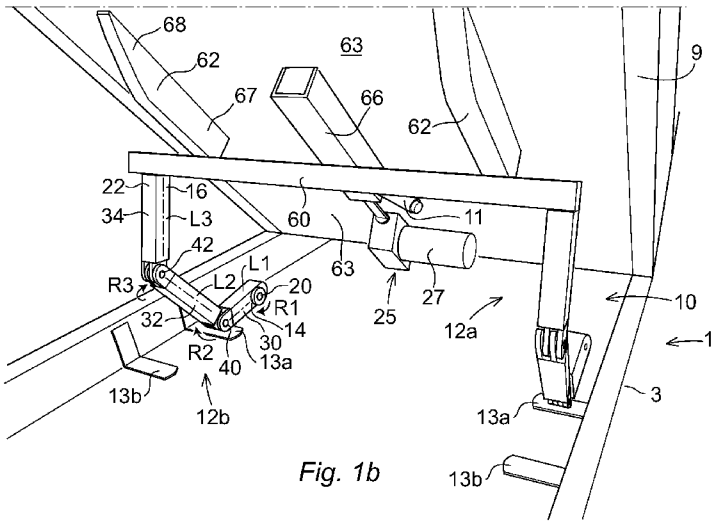



Fig. 1b

(57) Abstract: A furniture device (1) comprising a fundament (3), a first section (7) and a second section (9). The second section is adapted to be pivoted between a first orientation and a second orientation. The device comprises a pivoting member (10) with a pivot arm (12a), a first pivot (20) adapted to allow a first rotation (R1) of the pivot arm (12a) in relation to the fundament (3), and a pivoting mechanism (25) adapted to induce the first rotation. The pivot arm comprises an elongated first arm (30), an elongated second arm (32) and a second pivot (40) adapted to allow a second rotation (R2) of the second arm in relation to the first arm. The pivoting mechanism is adapted to act on an outer part (22) of the pivot arm, which outer part is located at a greater distance from the first pivot than the second pivot.

WO 2012/072336 A1