

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
7 September 2001 (07.09.2001)

PCT

(10) International Publication Number
WO 01/65693 A2

- (51) International Patent Classification⁷: H03J 9/06 (74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP01/01962
- (22) International Filing Date: 21 February 2001 (21.02.2001) (81) Designated States (*national*): CN, JP, KR, SG.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: PCT/SG00/00034 3 March 2000 (03.03.2000) SG Published:
— without international search report and to be republished upon receipt of that report
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: DAVID, Valdo; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRANSFERRING DATA FROM ONE DEVICE TO ANOTHER

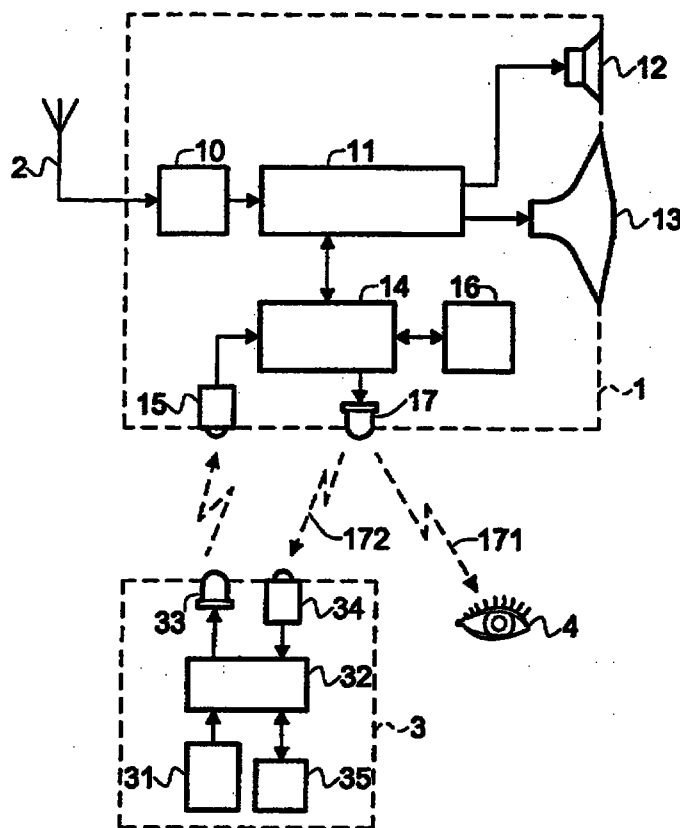

(57) Abstract: A method and arrangement for installing or updating a large number of television receivers in e.g. hotels is disclosed. One of the receivers (1) is manually programmed. The data is then downloaded from said receiver into a remote control unit (3) by modulating the conventional status LED (17) of the receiver. In accordance with the invention, the status LED is of a type which emits visible light (171) as well as infrared light (172). The modulated infrared light beam (172) is detected by an infrared detector (34) of the remote control device and stored (35) therein. The data stored in the remote control unit is subsequently uploaded to other receivers using the conventional infrared channel (33, 15).

WO 01/65693 A2