

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 December 2003 (24.12.2003)


PCT

(10) International Publication Number
WO 03/106590 A1

- (51) International Patent Classification⁷: **C10B 49/16**,
C10G 1/02, C10B 53/02
- (21) International Application Number: PCT/NL03/00442
- (22) International Filing Date: 16 June 2003 (16.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1020861 14 June 2002 (14.06.2002) NL
- (71) Applicant (for all designated States except US): **TNO BIOMASS TECHNOLOGY GROUP B.V.** [NL/NL];
Schoemakerstraat 97, NL-2628 VK Delft (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WAGENAAR, Bertus, Michiel** [NL/NL]; Kamperfoeliestraat 2, NL-7552 SK Hengelo (NL).
- (74) Agent: **ALTENBURG, Bernardus, Stephanus, Franciscus**; Octrooibureau Los En Stigter B. V., Weteringschans 96, NL-1017 XS Amsterdam (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR THE PYROLYSIS OF A PYROLYSABLE MASS

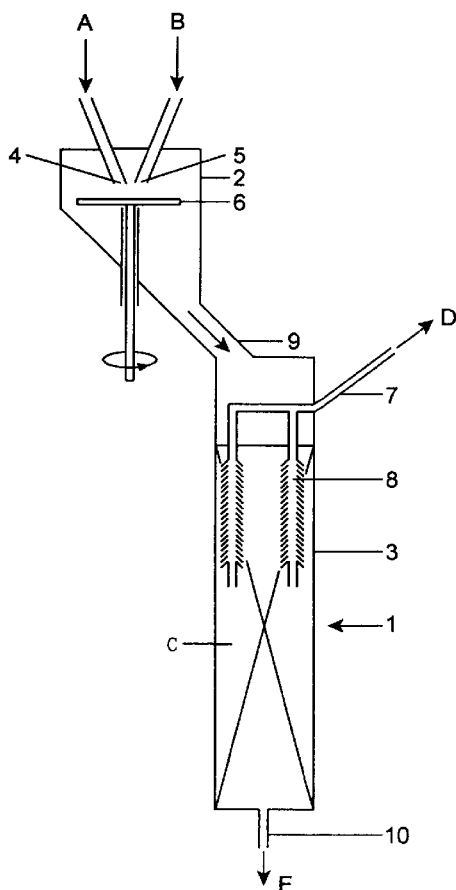

(57) Abstract: The invention relates to a method of pyrolysis wherein pyrolysable particles mixed with heated carrier particles are treated at an elevated temperature yielding a flammable product. According to the invention, use is made for mixing of a rotating, vibrating or shaking element or by mixing at a volume density of less than 40%; and mixing occurs to a specified minimum degree before the mixture is deposited and is pyrolysed in the reactor after depositing.

WO 03/106590 A1

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.