



- (51) **International Patent Classification:**
G06F 3/02 (2006.01) *G06F 3/0488* (2013.01)
H04M 1/23 (2006.01)
- (21) **International Application Number:**
PCT/GB2014/052183
- (22) **International Filing Date:**
17 July 2014 (17.07.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1312883.0 18 July 2013 (18.07.2013) GB
- (72) **Inventor; and**
- (71) **Applicant : LEWIS, Marcus** [GB/GB]; Whitfield Court,
Glewstone, Ross-on-Wye, Herefordshire HR9 6AS (GB).
- (74) **Agent: OXLEY, Robin;** Marks & Clerk LLP, Alpha
Tower, Suffolk Street Queensway, Birmingham B1 1TT
(GB).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** TACTILE KEYPAD FOR A DEVICE HAVING A TOUCH SENSITIVE DISPLAY

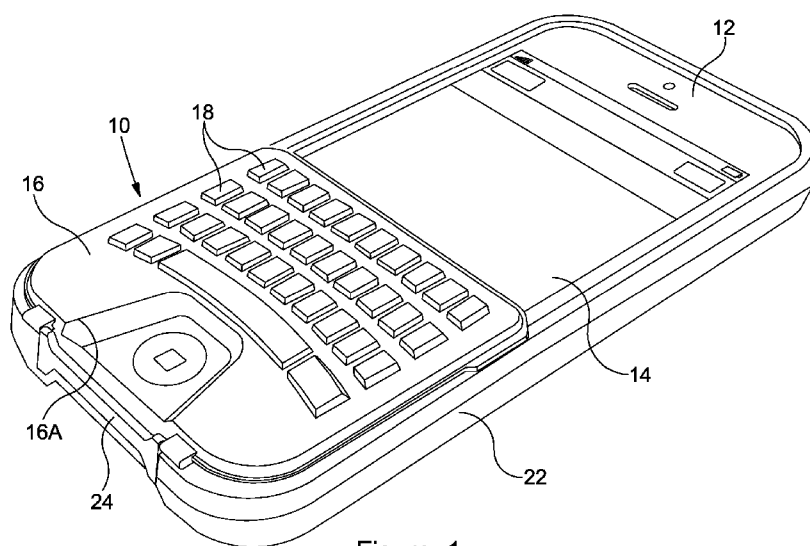


Figure 1

(57) **Abstract:** A keypad comprises a support (16) adapted, in use, to overlie but be spaced apart from part of a touch screen (14) of a device (12), the support 16 carrying a plurality of keys (18), each of which is movable relative to the support (16), being moveable between a raised, rest position and a depressed position, biasing means being provided to urge each key towards its rest position, each key (18) carrying a conductive material pad (20) which, when the key occupies its depressed position, contacts the surface of the touch screen (14).