



- (51) International Patent Classification:
B04B 11/02 (2006.01) *B04B 13/00* (2006.01)
- (21) International Application Number:
PCT/DK2011/050435
- (22) International Filing Date:
14 November 2011 (14.11.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2010 70482 12 November 2010 (12.11.2010) DK
- (71) Applicant (for all designated States except US): **ALFA LAVAL CORPORATE AB** [SE/SE]; Box 73, S-221 00 Lund (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **REIFF, Henrik** [DK/DK]; Syrenvænget 21, DK-3520 Farum (DK). **MADSEN, Bent** [DK/DK]; Snogegaardsvej 29, DK-2820 Gentofte (DK).
- (74) Agents: **JØRGENSEN, Bjørn, Barker** et al.; Awapatent A/S, Rigersgade 11, DK-1316 København K (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: A CENTRIFUGAL SEPARATOR

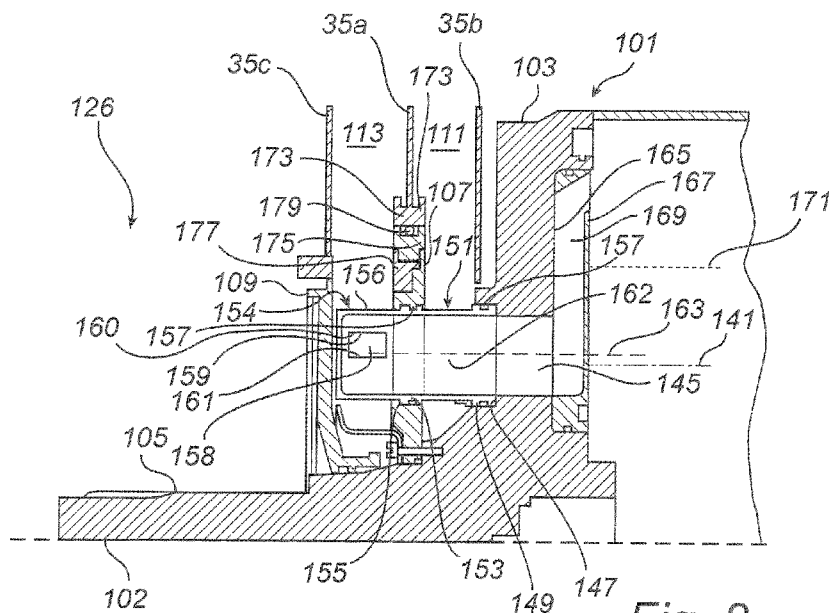


Fig. 8

(57) Abstract: A centrifugal separator for liquids with two phases of different density comprises a bowl with a base (103) defining a first rear area (111) in a casing. At least two outlet passages (145, 169) extend through the base (103). A first outlet passages communicates with a first outlet opening discharging liquid in the first rear area (111), and the second outlet passages (145) communicates with a second outlet opening (158) discharging liquid in a second rear area (113) rear of said first rear area (111). A flange (107) attached to the bowl and a partition (35a) of the casing with an annular sealing (175, 179) in between separates the first and the second rear area.

**Published:****(88) Date of publication of the international search report:**

7 September 2012

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*