(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
25 August 2011 (25.08.2011)

PCT

(10) International Publication Number
WO 2011/102774 A1

(51) International Patent Classification:
H04W 36/00 (2009.01)

(21) International Application Number:
PCT/SE2010/051481

(22) International Filing Date:
23 December 2010 (23.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/306,757 22 February 2010 (22.02.2010) US

(71) Applicant *(for all designated States except US)*: **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; SE-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **DIMOU, Konstantinos** [GR/SE]; Norrbackagatan 11, SE-113 41 Stockholm (SE). **LINDSTRÖM, Magnus** [SE/SE]; Turebergs allé 18, Lgh 1101, SE-191 64 Sollentuna (SE). **ZHAO, Wei** [SE/SE]; Gustav III:s Boulevard 109, SE-169 74 Solna (SE).

(74) Agent: **HASSELGREN, Joakim**; ERICSSON AB, Patent Unit LTE, Torshamnsgatan 23, S-164 80 Stockholm (SE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DETECTION OF RADIO LINK FAILURE (RLF) FOR RECOVERY

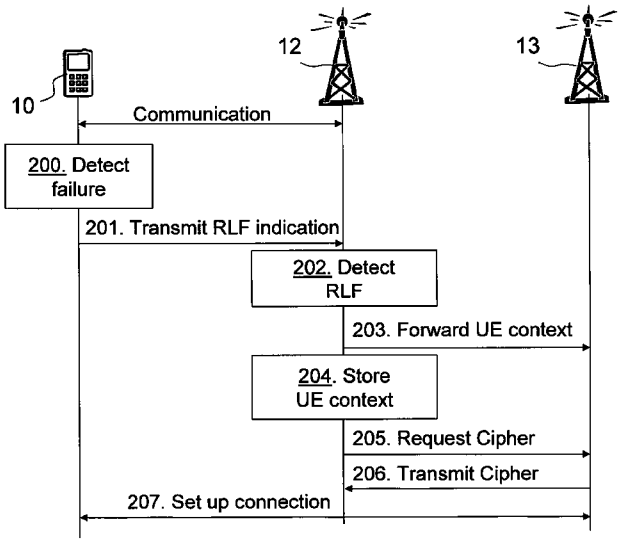


Fig. 2

(57) Abstract: Embodiments herein relate to a method in a user equipment (10) for handling a radio link failure in a radio communications network. The user equipment (10) is served in a first cell (14) controlled by a radio base station (12) and which radio base station (12) is comprised in the radio communications network, The user equipment (10) detects a first indication of a failure of a radio link between the user equipment (10) and the radio base station (12). The user equipment (10) then transmits a second indication of radio link failure to the radio base station (12) when the first indication is detected.

WO 2011/102774 A1

Published:

— *with international search report (Art. 21(3))*