

Description

Title of Invention: COMPOSITION FOR ELECTRONIC DEVICE

5 Technical Field

[0001]

The present invention relates to a composition to be usable for producing an electronic device, particularly a semiconductor device, and use of the same.

10 Background Art

[0002]

As a mounting technology for a semiconductor chip, a flip chip technology, by which a semiconductor chip is directly connected onto a substrate has been known. In the flip chip mounting, a semiconductor chip and a circuit substrate
15 are connected by means of electrodes (bumps) formed on the element formation surface side of the semiconductor chip. On this occasion, for the sake of reinforcement of the bonding parts and enhancement of the reliability of the connections, an underfill sealant, which is an adhesive composition, is generally filled between the semiconductor chip and the wiring substrate.

20 [0003]

As an underfill composition, adhesive compositions containing an epoxy-based compound and/or a (meth)acrylic compound or the like have been known (e.g. Patent Literature 1). Among them, a composition utilizing a radical curing reaction of a (meth)acrylic compound has an advantage over a
25 composition containing an epoxy-based compound that the reaction rate is higher and the efficiency in producing an electronic device can be enhanced.

[0004]

Meanwhile, various additives, such as a metal ion binder and an antioxidant, are mixed as needed, into an underfill sealant composition. By
30 this means, the quality of an electronic device can be enhanced by, for example, preventing a metal ion from migrating out of wiring by precipitation (Patent Literatures 2 and 3).

[0005]

As a method for filling an underfill sealant, it has been known that a
35 method in which a liquid adhesive composition is first applied on a wiring substrate and then a semiconductor chip is mounted to conduct simultaneously

electrode connection and sealing; a method (a so-called capillary method) in which electrical connection between an electrode on a semiconductor chip and a substrate is first established and then a liquid adhesive composition is applied on a side or a plurality of sides of the chip for sealing the gap between the wiring substrate and the semiconductor chip by capillarity and the like. By any of the methods, it is required to apply a liquid adhesive composition all over the wiring substrate, and to fill the liquid adhesive composition uniformly in the gap between the semiconductor chip and the wiring substrate, and the like.

Therefore, occasionally, a syringe, the substrate and the like are heated to room temperature or higher as needed in order to increase flowability of the adhesive composition.

[0006]

However, when an underfill sealant utilizing a radical curing reaction is used, there has been a problem in that a curing reaction of an underfill composition may occasionally progress prematurely before carrying out sealing, which leads to inadequate electrode connection or poor work efficiency. Such a problem tends to occur when an adhesive composition is in a state at room temperature or higher as described above, or the composition is in contact with a metal such as copper or an ion thereof contained in an electrode part and the like. In order to overcome the problem, whereas an additive is mixed in an underfill sealant composition or the working temperature is lowered, it has not been sufficient. Consequently, further improvement of an adhesive composition to be used for an electronic device has been sought after.

Citation List

Patent Literature

[0007]

Patent Literature 1: Japanese Patent Laid-Open No. 2010-226098

Patent Literature 2: Japanese Patent Laid-Open No. 2005-333085

Patent Literature 3: Japanese Patent Laid-Open No. 2008-98646

Summary of Invention

Technical Problem

[0008]

An object of the present invention is to solve the aforescribed problems in using a conventional adhesive composition and to provide a composition

which improves productivity of electronic devices. Further, another object is to provide an electronic device or an electronic appliance containing the composition.

5 Solution to Problem

[0009]

The present invention relates to the following items.

[0010]

1. A composition for electronic device comprising:

10 (a) a (meth)acrylic compound and

(c) a particle having a functional group having metal scavenging functionality.

[0011]

2. The composition according to the above item 1, wherein the functional
15 group having metal scavenging functionality is selected from the group consisting of carboxy group, amine group and imidazole group.

[0012]

3. The composition according to the above item 1 or 2, wherein the particle is
20 porous polystyrene and/or silica gel having one or more functional groups having metal scavenging functionality.

[0013]

4. The composition according to any one of the above items 1 to 3, further comprising (b) a maleimide compound.

[0014]

25 5. The composition according to the above item 4, wherein the maleimide compound comprises a bismaleimide.

[0015]

6. The composition according to any one of the above items 1 to 5, further comprising a radical initiator.

30 [0016]

7. The composition according to any one of the above items 1 to 6, which is used as an underfill sealant.

[0017]

35 8. The composition according to any one of the above items 1 to 7, which is used in flip chip mounting.

[0018]

9. An electronic device comprising a cured product of the composition according to any one of the above items 1 to 8.

[0019]

10. An electronic appliance comprising the electronic device according to the above item 9.

Advantageous Effects of Invention

[0020]

The progress of the curing reaction of a composition according to the present invention at room temperature or higher and 80°C or lower can be suppressed adequately. Therefore, the progress of a curing reaction during flip chip mounting of a semiconductor chip is suppressed, and thus the composition of the present invention does not cause a defective electrode connection during flip chip mounting of a semiconductor chip and sufficient working time in a mounting process can be secured. As the result, a higher quality product can be provided without decreasing the production efficiency of an electronic device by flip chip mounting.

Description of Embodiments

[0021]

A composition for an electronic device according to the present invention contains at least

(a) a (meth)acrylic compound, and

(c) a particle having one or more functional groups having metal scavenging functionality. The respective components will be described below.

[0022]

<(a) (Meth)acrylic compound >

A (meth)acrylic compound to be used according to the present invention may have one or more (meth)acryloyl groups, and has preferably two or more (meth)acryloyl groups. Ordinarily, it is preferable that a compound having one (meth)acryloyl group and/or a compound having three or more (meth)acryloyl groups is used as needed in addition to a compound having two (meth)acryloyl groups. Further, the (meth)acrylic compound may be a monomer or an oligomer.

[0023]

Although there is no particular restriction on a (meth)acrylic compound usable for the present invention, examples of monofunctional compounds having

a (meth)acryloyl group include phenylphenol acrylate, methoxypolyethylene acrylate, acryloyloxyethyl succinate, an aliphatic acrylate, methacryloyloxyethyl phthalic acid, phenoxyethylene glycol methacrylate, an aliphatic methacrylate, β -carboxyethyl acrylate, isobornyl acrylate, isobutyl acrylate, tert-butyl acrylate, hydroxyethyl acrylate, hydroxypropyl acrylate, dihydrocyclopentadiethyl acrylate, cyclohexyl methacrylate, tert-butyl methacrylate, dimethylaminoethyl methacrylate, diethylaminoethyl methacrylate, tert-butylaminoethyl methacrylate, 4-hydroxybutyl acrylate, tetrahydrofurfuryl acrylate, benzyl acrylate, ethylcarbitol acrylate, phenoxyethyl acrylate, and methoxytriethylene glycol acrylate. Examples of compounds having two or more (meth)acryloyl groups include hexanediol dimethacrylate, hydroxyacryloyloxypropyl methacrylate, hexanediol diacrylate, urethane acrylate, epoxy acrylate, bisphenol A-type epoxy acrylate, modified epoxy acrylate, fatty acid-modified epoxy acrylate, amine-modified bisphenol A-type epoxy acrylate, allyl methacrylate, ethylene glycol dimethacrylate, diethylene glycol dimethacrylate, ethoxylated bisphenol A dimethacrylate, tricyclodecane dimethanol dimethacrylate, glycerine dimethacrylate, polypropylene glycol diacrylate, propoxylated ethoxylated bisphenol A diacrylate, 9,9-bis(4-(2-acryloyloxyethoxy)phenyl)fluorene, tricyclodecane diacrylate, dipropylene glycol diacrylate, polypropylene glycol diacrylate, propoxylated neopentyl glycol diacrylate, tricyclodecane dimethanol diacrylate, 1,12-dodecanediol dimethacrylate, trimethylolpropane trimethacrylate, dipentaerythritol polyacrylate, dipentaerythritol hexaacrylate, trimethylolpropane triacrylate, trimethylolpropane ethoxytriacrylate, polyether triacrylate, glycerine propoxy triacrylate, pentaerythritol tetraacrylate, pentaerythritolethoxy tetraacrylate, ditrimethylol propane tetraacrylate, monopentaerythritol acrylate, dipentaerythritol acrylate, tripentaerythritol acrylate, polypentaerythritol acrylate, and pentaerythritol triacrylate.

[0024]

Examples of commercial products of a (meth)acrylic compound usable for the present invention include functional monomers of SR&CD series, functional epoxy acrylate oligomers and functional urethane acrylate oligomers of CN series from Sartomer, Co., Inc., Light Ester series, and Light Acrylate series from Kyoisha Chemical Co., Ltd., and NK Ester from Shin-Nakamura Chemical Co., Ltd.

[0025]

The (meth)acrylic compounds may be used singly or in a combination of two or more kinds thereof.

[0026]

The content of a (meth)acrylic compound in accordance with the present invention may be adjusted depending on the purpose of use, and is preferably from 10 to 90% by weight based on the total weight of a compound, and more preferably from 20 to 60% by weight. If the content of a (meth)acrylate is within the range, the viscosity of a composition before curing is low, and is superior in workability, and also in strength after curing.

[0027]

<(c) Particle having functional group having metal scavenging functionality>

A composition according to the present invention for an electronic device contains a particle having one or more functional groups having metal scavenging functionality. When a composition according to the present invention is used for producing a semiconductor device, the composition is, for example, applied on a wiring substrate as described below. In such an event, the composition is occasionally put in a state at room temperature or higher in order to increase flowability. On this occasion, since the composition according to the present invention contains a particle having one or more functional groups having metal scavenging functionality, a progress of a curing reaction is suppressed adequately and the work efficiency at a succeeding mounting process is not decreased. This is because, as presumed by the inventors, a metal or an ion thereof, particularly copper or a copper ion, with which the composition according to the present invention comes into contact at a mounting process of an electronic device, is scavenged by the particle. Further, the particle is stable in and after scavenging a metal or an ion thereof without causing any problem in the reactivity, adhesiveness or the like of an adhesive composition.

[0028]

Examples of a material constituting a particle include a polymer material and an inorganic material. Examples of a polymer material include a polymer of one or more monomers selected from the group consisting of styrene, substituted styrene, divinylbenzene, an acrylic acid ester, a methacrylic acid ester, an alkyl ester of a monoolefinic unsaturated dicarboxylic acid, a vinyl ester of a carboxylic acid, acrylamide, methacrylamide, and a derivative thereof. Examples of an inorganic material include glass, silica, alumina, titanate, and a hybrid oxide thereof, and graphite. The particle is preferably porous. A

porous particle can be formed from the materials by a publicly known method. These particles have preferably one or more kinds of functional groups having metal scavenging functionality on the surfaces. Introduction of a functional group to a surface of a particle, particularly a porous particle, which is obtained from the above materials is publicly known (e.g. see Japanese Laid-open Patent Publication No. 2008-502470).

[0029]

There is no particular restriction on a functional group having metal scavenging functionality, and examples of the same include a carboxy group, an amine group, an imidazole group, a thiol group, and a functional group derived therefrom. Examples of a functional group derived from the functional groups include a thiourea group, an iminodiacetate group, an aminomethyl phosphate group, a benzylamine group, a mercaptophenylamino group, an aminoethylamino group, an imidazol-1-ylpropylamino group, an aminopropyl group, a mercaptopropyl group, a methylthiourea group, and a triamine group. When one particle has a plurality of functional groups having metal scavenging functionality, the functional groups may be the same or different.

[0030]

The structure and the amount used of a particle having one or more functional groups having metal scavenging functionality to be used according to the present invention may be adjusted appropriately depending on the purpose of use, such that the functional group is present in a composition in an amount sufficient for scavenging a metal ion and the like, and the composition functions as an adhesive and the like without any particular problem. Although there is no particular restriction on the particle used according to the present invention, the surface area thereof in a dry state is preferably, for example, $0.1 \text{ m}^2/\text{g}$ or more, more preferably from 0.1 to $3000 \text{ m}^2/\text{g}$, further preferably from 10 to $3000 \text{ m}^2/\text{g}$, and still further preferably from 10 to $2000 \text{ m}^2/\text{g}$. Further, the number of functional groups contained in 1 g of the particle is preferably, for example, $1.0 \times 10^{-7} \text{ mol/g}$ or more, more preferably from 1.0×10^{-5} to $1.0 \times 10^{-1} \text{ mol/g}$, and further preferably from 1.0×10^{-4} to $1.0 \times 10^{-2} \text{ mol/g}$. Further, although the content of a particle having one or more functional groups having metal scavenging functionality in a composition according to the present invention should be dependent on the number of functional groups contained in the particle, it is preferably, for example, from 0.01 to 20% by weight based on the total weight of a composition, and more preferably from 0.1 to 10% by weight.

If the particle content is within the range, a composition with viscosity not causing any problem in operation can be produced and a high quality electronic device can be produced by scavenging adequately a metal ion and the like in a process for producing an electronic device.

[0031]

The size of the particle for a composition according to the present invention is preferably selected appropriately depending on the purpose of use. When the particle is used as an underfill for an electronic device, it should preferably be smaller than the dimension of a gap between an element formation surface of a semiconductor chip and a wiring substrate, and, for example, the average particle size should be preferably 50 μm or less, more preferably 30 μm or less, further preferably 20 μm or less, and still further preferably from 0.1 to 10 μm . If the size of the particle is too large, the particle may be trapped between electrode connections in producing an electronic device, so that good electrical connection may not be established. A particle with a size in the range may be originally synthesized, or a particle may be ground and classified to a desired size as needed.

[0032]

Examples of commercial products usable as a particle having one or more functional groups having metal scavenging functionality include compounds containing polystyrene, such as QuadraPure (registered trademark) TU, QuadraPure (registered trademark) IDA, QuadraPure (registered trademark) BzA, QuadraPure (registered trademark) EDA, QuadraPure (registered trademark) BdZ, QuadraPure (registered trademark) IMDAZ, QuadraPure (registered trademark) AMPA, QuadraPure (registered trademark) DET, QuadraPure (registered trademark) MPA, and QuadraPure (registered trademark) AEA from Reaxa Limited, compounds containing silica gel, such as QuadraSil (registered trademark) AP, QuadraSil (registered trademark) MTU, QuadraSil (registered trademark) TA, and QuadraSil (registered trademark) MP from Reaxa Limited, ethylenediaminetriacetic acid acetamide, polymer-bound, and N,N,N'-trimethylethylenediamine, polymer-bound, from Sigma-Aldrich, Inc. The compounds may be used singly or in a combination of two or more kinds thereof. Meanwhile, if a particle having one or more functional groups particularly having copper scavenging functionality among the above is used, an advantageous effect of the present invention can be easily exerted.

[0033]

<(b) Maleimide compound>


A composition according to the present invention may preferably contain further a (b) maleimide compound in addition to the (a) (meth)acrylic compound and the (c) particle having one or more functional groups having metal

scavenging functionality. Although there is no particular restriction on a maleimide compound to be contained in a composition according to the present invention, examples thereof include the following compounds.

[0034]

A maleimide compound has at least one, preferably one or two following moiety (I) in the molecule.

[0035]

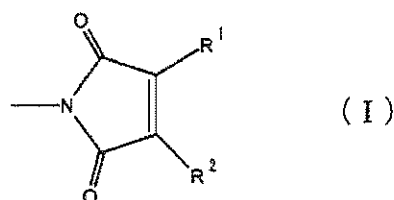

In the formula, R¹ and R² represent H, or a alkyl group having 1 to 6 carbons; or R¹ and R² together represent an alkylene group having 2 to 6 carbons.

Preferably R¹ and R² are both H; or R¹ and R² together represent a 1,4-butylene group.




[0036]

The maleimide compound is preferably liquid at room temperature and therefore the moiety (I) bonds to a group that allows the maleimide compound to be liquid, for example, an organic group having a branched alkyl, alkylene, alkylene oxide, alkylene carboxyl, or alkylene amide structure having sufficient length and branches to render the maleimide compound liquid. The maleimide compound may have one, or two or more structures (I). The compound having two of these groups is a bismaleimide compound. In addition, a maleimide compound, even if it is not liquid, may be used if the composition becomes liquid as being mixed with another maleimide compound or mixed with another component.


[0037]

Examples of a maleimide compound, in which the moiety (I) bonds to an alkyl group or an alkylene group (the groups may have a double bond, or a saturated aliphatic ring), include the following compounds.


[0038]

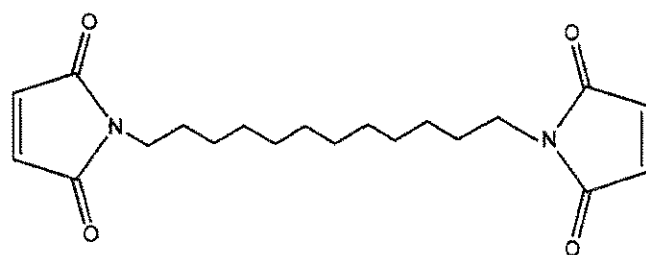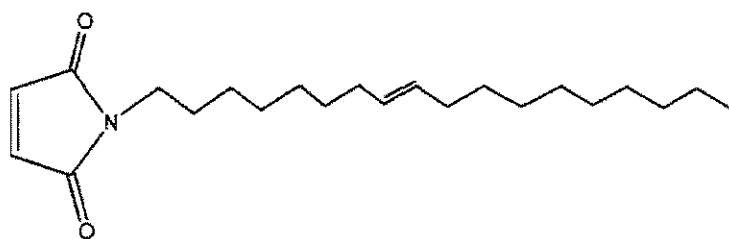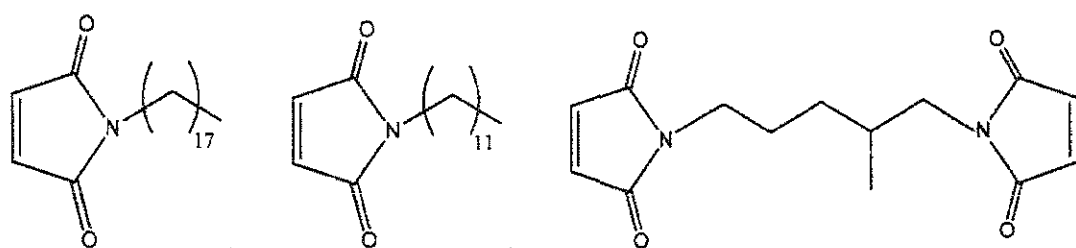


[0039]

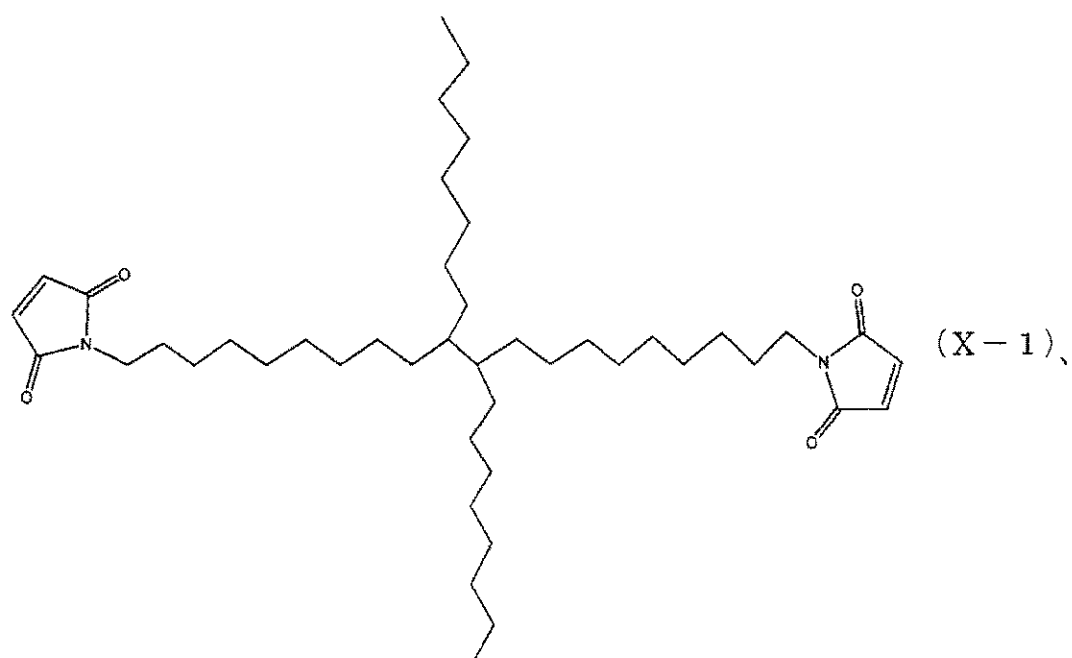

[0040]

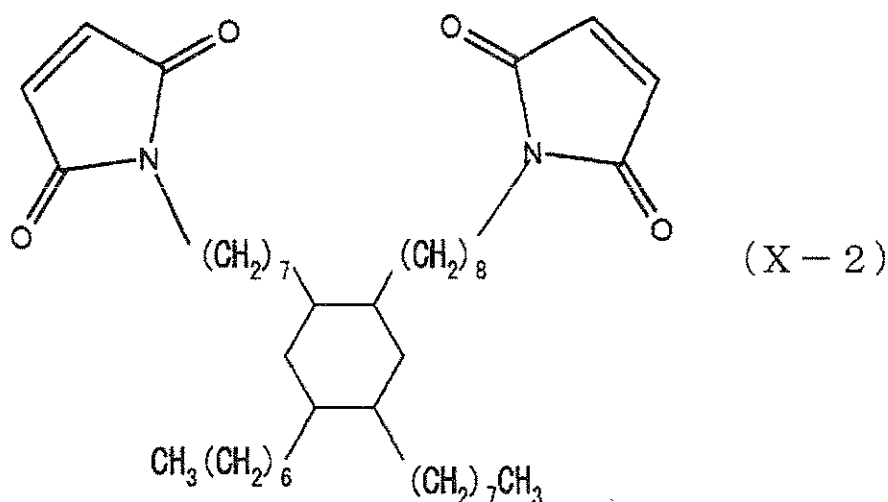

[0041]

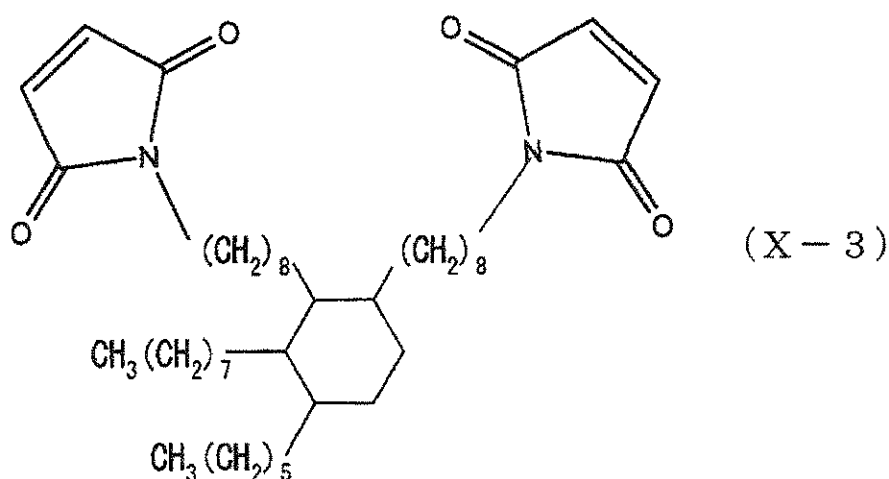

[0042]


- 5 Particularly preferable examples include stearyl maleimide, oleyl maleimide, behenyl maleimide, and a 1,20-bismaleimide derivative of 10,11-dioctyleicosane, as well as a combination thereof. A 1,20-bismaleimide derivative of 10,11-dioctyleicosane is available from Henkel AG & Co. under a product name of X-BMI, which is synthesized from 1,20-diamino-10,11-dioctyl-
- 10 eicosane and/or a diamine of a cyclic isomer thereof by a method according to U.S. Patent No. 5973166 (the entire disclosures of U.S. Patent No. 5973166 are incorporated herein by reference). X-BMI contains one, or two or more of 1,20-bismaleimide-10,11-dioctyl-eicosane [compound denoted by Formula (X-1)], 1-heptylene maleimide-2-octylene maleimide-4-octyl-5-heptylcyclohexane
- 15 [compound denoted by Formula (X-2)], 1,2-dioctylene maleimide-3-octyl-4-hexylcyclohexane [compound denoted by Formula (X-3)], and the like.

Bismaleimide compounds denoted by formulas (X-1) to (X-3) may be also preferably used solely.

[0043]

Examples of a maleimide compound, in which the moiety (I) is bonded with a group having an alkylene oxide structure, include the following compounds.

[0044]

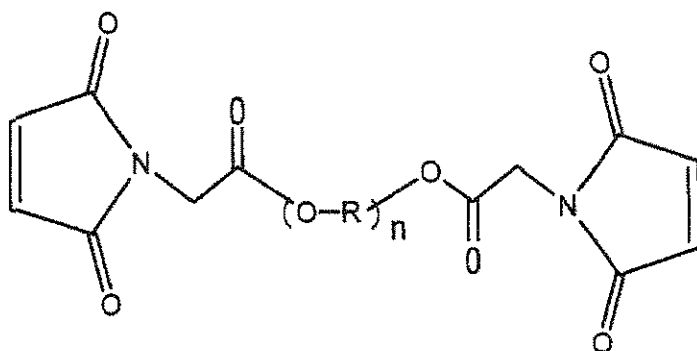


In the formula, R is an alkylene group, preferably ethylene or 1,2-propylene, and n is an integer from 2 to about 40, wherein the magnitude of an integer and the distribution of n to render the compound liquid are selected preferably. The compound is available from DIC Corporation as LUMICURE (registered trademark) MIA200.

[0045]

Examples of another usable maleimide compound include a compound (3,4,5,6-tetrahydrophthalimide ethyl acrylate) denoted by the following formula.

[0046]

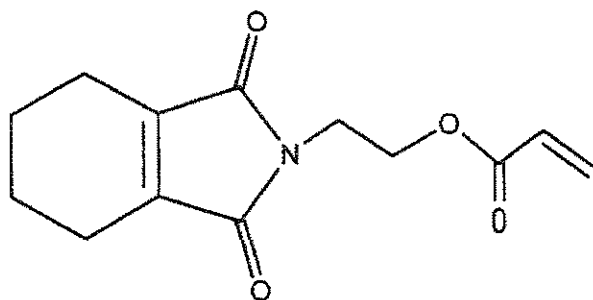

[0047]

The above maleimide compounds may be used singly or in a combination of two or more kinds thereof.

[0048]

The content of a maleimide compound in accordance with the present invention is preferably from 0 to 50% by weight based on the total weight of a composition, more preferably from 0.1 to 50% by weight, and further preferably from 1 to 20% by weight. If the content of a maleimide compound is within the range, the curing rate becomes superior.

[0049]

Meanwhile, when a composition contains a maleimide compound in accordance with the present invention, the (meth)acrylic compound and the maleimide compound in a composition polymerize by a radical reaction by being heated to a predetermined temperature. In this case, only 1 kind of compound may polymerize to form a homopolymer, or two or more kinds of compounds may polymerize to form a copolymer.

[0050]

<Filler>

A composition according to the present invention may contain a filler. By blending a filler, a composition for an electronic device having a low coefficient of linear expansion exhibiting superior dimensional stability and improved flame resistance can be obtained. As a filler, either of an insulating inorganic filler or an electrically conductive inorganic filler may be selected depending on the purpose of use. Examples of an insulating inorganic filler include silica, calcium silicate, aluminum hydroxide, magnesium hydroxide, calcium carbonate, magnesium carbonate, magnesium oxide, aluminum nitride, and boron nitride, and particularly silica is preferable. Examples of an electrically conductive inorganic filler include a metal and carbon black.

[0051]

Further, a filler subjected to a surface modification according to need may be also used. Examples of commercial products include a lineup of "Mitsubishi carbon black" from Mitsubishi Chemical Corporation, "Asahi" series from Asahi Carbon Co., Ltd., calcium silicate "PCM Lite" series, aluminum hydroxide "ALH" series, and alumina-based "Celasule" from Kawai Lime Ind. Co., Ltd., titanium oxide "STR series", silica "Sciqus Series", zinc oxide "FINEEX series", magnesium oxide "SMO Series", and zirconium oxide "STR Series" from Sakai Chemical Industry Co., Ltd., silica, oxidized alumina "ADMAFINE" series from Admatechs Company Limited, silica "SNOWTEX" series from Nissan Chemical Ind., Ltd., and a metallic oxide containing silica and aluminum oxide "NanoTek" series from C.I. Kasei Co., Ltd.

[0052]

When a composition according to the present invention is used for producing, for example, a semiconductor device, the average particle diameter of a filler is preferably smaller than the gap dimension between a semiconductor chip element formation surface and a wiring substrate. If the average particle diameter of a filler is too large, the filler may be trapped between metal connections in producing a semiconductor device, so that good electrical reliability may not be established, or a chip may break.

[0053]

Although the blending amount of a filler may be adjustable depending on the purpose of use, it is preferably, for example, from 1 to 99% by weight based on the total weight of an adhesive composition, and more preferably from 10 to 80% by weight. If the content is within the range, a composition having a sufficient effect of filler addition and a viscosity free from any problem in handling can be obtained.

[0054]

<Radical initiator>

A composition according to the present invention contains preferably a radical initiator. As a radical initiator to be used according to the present invention, a thermal radical initiator is preferable. As a thermal radical initiator, an organic peroxide is preferable, and one that generates a radical at a convenient temperature is selected.

[0055]

Although there is no particular restriction on a radical initiator, examples thereof include diisobutyl peroxide, cumyl peroxyneodecanate, di-n-propyl peroxydicarbonate, diisopropyl peroxydicarbonate, di-sec-butyl peroxydicarbonate, 1,1,3,3-tetramethylbutyl peroxyneodecanate, di(4-t-butylcyclohexyl)peroxydicarbonate, di(2-ethylhexyl)peroxydicarbonate, t-hexyl peroxyneodecanate, t-butyl peroxyneodecanate, t-butyl peroxyneohexanate, t-hexyl peroxyneohexanate, t-butyl peroxyneohexanate, di(3,5,5-trimethylhexanoyl)peroxide, dilauroyl peroxide, 1,1,3,3-tetramethylbutyl peroxy-2-ethyl hexanate, disuccinic acid peroxide, 2,5-dimethyl-2,5-di(2-ethylhexanoylperoxy)hexane, t-hexyl peroxy-2-ethyl hexanate, di(4-methylbenzoyl)peroxide, t-butylperoxy-2-ethyl hexanate, dibenzoyl peroxide, 1,1-di(t-butylperoxy)-2-methylcyclohexane, 1,1-di(t-hexylperoxy)-3,3,5-trimethylcyclohexane, 1,1-di(t-hexylperoxy)cyclohexane, 1,1-di(t-butylperoxy)cyclohexane,

2,2-di(4,4-di-(t-butylperoxy)cyclohexyl)propane, t-hexylperoxy isopropyl monocarbonate, t-butyl peroxy maleic acid, t-butyl peroxy-3,5,5-trimethyl hexanate, t-butyl peroxy laurate, t-butyl peroxyisopropyl monocarbonate, t-butylperoxy 2-ethylhexyl monocarbonate, t-hexyl peroxybenzoate, 2,5-dimethyl-2,5-di(benzoyl peroxy)hexane, t-butyl peroxyacetate, 2,2-di(t-butylperoxy)butane, t-butyl peroxybenzoate, n-butyl-4,4-di-(t-butylperoxy)valerate, di(2-t-butyl peroxyisopropyl)benzene, dicumyl peroxide, di-t-hexyl peroxide, t-butyl cumyl peroxide, di-t-butyl peroxide, p-menthane hydroperoxide, 2,5-dimethyl-2,5-di(t-butylperoxy)hexane-3, 3,5-diisopropylbenzene hydroperoxide, 1,1,3,3-tetramethyl butyl hydroperoxide, cumene hydroperoxide, t-butyl hydroperoxide, and 2,3-dimethyl-2,3-diphenyl butane. The organic peroxides can be purchased from Akzo Nobel N.V., Gio specialities Chemical, Arkema S.A., NOF Corporation, Kayaku Akzo Corporation, and the like. The same may be used singly, or in a combination of two or more kinds thereof.

[0056]

The blending amount of a radical initiator is preferably from 0.01 to 10% by weight based on the total weight of a composition, and more preferably from 0.1 to 5% by weight. If the blending amount of a radical initiator is within the range, there occurs no problem of instability in applying the composition or of prolongation of a curing time.

[0057]

In addition to the aforescribed components, a composition according to the present invention may contain an additive as needed, such as a silane coupling agent, a rubber component, an antioxidant, a light stabilizer, a radical stabilizing agent, and a surfactant. A silane coupling agent and a rubber component can advantageously improve the adhesive property of a composition, relax a stress, and reduce warping of a cured reaction product. Meanwhile, an antioxidant, and a radical stabilizing agent may be used in order to extend the pot life. A surfactant may be added for defoaming in coating, or for improving the wettability to a target to be coated and the leveling property.

[0058]

By blending a silane coupling agent to a composition the adhesive property of an adhesive can be improved.

[0059]

Although there is no particular restriction on a silane coupling agent, examples thereof include an aminosilane coupling agent, an epoxy silane

coupling agent, a ureide silane coupling agent, an isocyanate silane coupling agent, a vinyl silane coupling agent, a (meth)acrylic silane coupling agent, and a ketimine silane coupling agent, and among these, an isocyanate silane coupling agent, a (meth)acrylic silane coupling agent, and an epoxy silane coupling agent are preferable. The silane coupling agents can be purchased from Dow Corning Toray Silicone Co., Ltd., Shin-Etsu Silicone, Matsumoto Fine Chemical Co., Ltd., Tokyo Chemical Industry Co., Ltd. and the like.

[0060]

Although the blending amount of a silane coupling agent is adjustable appropriately, it is preferably, for example, from 0 to 10% by weight based on the total weight of a composition, and more preferably from 0 to 5% by weight. If the content of a silane coupling agent is too high, a silane coupling agent vaporizes during thermal compression bonding in a flip chip process to develop voids.

[0061]

Although there is no particular restriction on rubber, examples thereof include industrial rubbers, such as acrylic rubber, nitrile rubber, butadiene rubber, and nitrile butadiene rubber, and a low molecular weight crosslinking agent for rubber. Examples of commercial products for industrial rubbers include "Paracron RP" series from Negami Chemical Industrial Co., Ltd., "Staphyloid IM" series and "Staphyloid AC" series from Ganz Chemical Co., Ltd., "Zeon" series from Zeon Kasei Co., Ltd., and "METABLEN C/E/W/S/SX/SRX" from Mitsubishi Rayon Co., Ltd. Examples of commercial products for a low molecular weight crosslinking agent for rubber include "Ricon" series from Sartomer, "Poly bd" and "Poly ip" series, "EPOL" series, and "Krasol" from Idemitsu Kosan Co., Ltd., and "NISSO-PB" from Nippon Soda Co., Ltd. The products may be used singly or in a combination of two or more kinds thereof.

[0062]

Further, a commercial product of an acrylic resin, in which a rubber particle has been dispersed in advance, may be used, and examples thereof include Paracron SN-50, AS-3000, ME-2000, W-1163, W-248E, W-197C, PRE-COAT 200, and PANLON S-2012 from Negami Chemical Industrial Co., Ltd.

[0063]

Although the blending amount of rubber is adjustable appropriately, it is preferably, for example, from 0 to 30% by weight based on the total weight of an adhesive composition, and more preferably from 0 to 20% by weight. If the

rubber content is too high, the viscosity of an adhesive composition increases too much causing such problems that the handling property may be deteriorated, or mixing of other components may become difficult, or the adhesiveness of an adhesive may be deteriorated.

5 [0064]

Examples include for an antioxidant and a radical stabilizing agent hydroquinones, benzoquinones, and hindered phenols; and for a light stabilizer benzotriazole-based, triazine-based, benzophenone-based, benzoate-based, and hindered amine-based ultraviolet absorbers. A surfactant may be selected out of catalogs of commercial products depending on a purpose of use.

10 [0065]

<Production method of composition for electronic device>

A composition according to the present invention can be obtained by mixing uniformly the above specified respective components, as well as a solvent according to need. A composition is only required that a viscosity thereof is adjusted as long as it can be applied by a coater such as a dispenser, and may be also solventless. It is also possible to adjust viscosity by selection of compounds in a composition, or by adjustment of the blending amounts thereof. A composition according to the present invention can be produced by kneading uniformly predetermined amounts of the respective components by, without limitation thereto, using singly or in a combination of publicly known various kneading machines, such as a homodisperser, a universal mixer, a Banbury mixer, a kneader, a twin roll mill, a triple roll mill, and an extruder. Kneading may be conducted under various conditions, such as at normal temperature or with heating, at a normal pressure, a reduced pressure, or an increased pressure, or with inert gas flow.

25 [0066]

A composition for an electronic device according to the present invention is used preferably for an electronic device, particularly as an underfill sealant (sealant) in a device including a semiconductor chip, but without limitation thereto.

30 [0067]

<Electronic device and production method of the same>

Next, a production method of an electronic device comprising a composition according to the present invention will be described. Although there is no particular restriction on a production method of an electronic device,

a flip chip process is preferably used. In a flip chip process, it is particularly preferable to coat a circuit face of a wiring substrate with a composition according to the present invention. A production method of an electronic device comprises, for example,

5 (1) a coating process for coating a circuit face of a wiring substrate with a composition according to the present invention, and

(2) a bonding and sealing process for placing a semiconductor chip on the composition applied on the wiring substrate, and performing electrical connection between the semiconductor chip and the wiring substrate and seal of
10 a gap therebetween. The respective processes will be described below.

[0068]

<(1) Coating process>

In the coating process, a composition according to the present invention is applied on a circuit face of a wiring substrate. All over the surface of a wiring
15 substrate or only a part where a semiconductor chip is to be mounted may be coated with the composition. Examples of a coating method include coating methods using a spin coater, a dispenser, a roller, and the like and screen printing. In this connection, a syringe used in the coating process, a substrate, and the like may be heated to room temperature or higher as needed so as to
20 improve the flowability of the composition.

[0069]

<(2) Bonding and sealing process>

In the bonding and sealing process, electrical connection between the semiconductor element and the wiring substrate is performed, and
25 simultaneously a gap between the semiconductor element and the circuit substrate is sealed with a composition according to the present invention to produce an electronic device. Firstly, a semiconductor chip is placed on a part coated with an adhesive composition on a wiring substrate. On this occasion, a circuit face of the wiring substrate (namely, a face coated with the composition
30 in the coating process) and an element formation surface of the semiconductor chip are so aligned that the two face each other. Then, thermal compression bonding is followed. Heating may be performed additionally after the thermal compression bonding in order to cure the adhesive composition. In general, as a method for thermal compression bonding and connection, thermal compression
35 bonding is performed immediately after position adjustment using a flip chip bonder, or after position adjustment and provisional mounting, heating

connection is performed in a reflow oven, and the like. On this occasion, a thermal profile suitable for a package or a sealing method is applied. Further, for chip mounting, not only a flip chip bonder, a die bonder, and the like, with which position adjustment is possible, may be also used alternatively.

5 [0070]

There is no particular restriction on the temperature for thermal compression bonding. When an electrode is a solder bump or a solder cap bump, a temperature higher than the melting point by 10 to 100°C is preferable, 200°C or higher is preferable, and 210 to 300°C is more preferable. The duration time for thermal compression bonding is preferably from 1 to 20 sec, and the pressure is preferably from 0.1 to 7 MPa. Further, if additional heating is performed for curing completely an adhesive composition after the thermal compression bonding, for example, 150 to 220°C for 30 to 180 min are preferable.

[0071]

15 An electronic device obtained as above can be applied to various electronic appliances utilizing a semiconductor chip, such as a cell phone, a personal computer, and a TV.

Examples

20 [0072]

The present invention will be described below in more details by way of Examples. However, the present invention is not restricted by the following Examples.

[0073]

25 Table 1 shows compounds used in the following Examples and Comparative Examples.

[0074]

[Table 1]

Component	Name of source material	Description of compound
(Meth)acrylate	CN120 (produced by Sartomer)	Epoxy acrylate oligomer
	SR9003 (produced by Sartomer)	Propoxylated neopentyl glycol diacrylate
	SR480 (produced by Sartomer)	Ethoxylated bisphenol A dimethacrylate
	SR444 (produced by Sartomer)	Pentaerythritol triacrylate
Maleimide	LUMICURE MIA200 produced by DIC Corporation	Polyalkylene maleimide acetate
Thermal radical initiator	Perbutyl Z (produced by NOF Corporation)	t-butyl peroxybenzoate
Filler	SE-2030 (produced by Admatechs Co., Ltd.)	Silica
Coupling agent	KBM-503 (produced by Shin-Etsu Chemical Co., Ltd.)	3-Methacryloxypropyltrimethoxysilane
Metal scavenging agent	QuadraPure (registered trademark) TU (produced by Reaxa Limited)	Polystyrene with thiourea group
	QuadraPure (registered trademark) IDA (produced by Reaxa Limited)	Polystyrene with iminodiacetate group
	QuadraPure (registered trademark) BzA (produced by Reaxa Limited)	Polystyrene with benzylamine group
	QuadraPure (registered trademark) EDA (produced by Reaxa Limited)	Polystyrene with amine group
	QuadraPure (registered trademark) BdZ (produced by Reaxa Limited)	Polystyrene with imidazole group
	QuadraPure (registered trademark) IMDAZ (produced by Reaxa Limited)	Polystyrene with imidazol-1-ylpropylamino group
	QuadraSil (registered trademark) AP (produced by Reaxa Limited)	Silica gel with aminopropyl group
	QuadraSil (registered trademark) MTU (produced by Reaxa Limited)	Silica gel with methyl thiourea group
	QuadraSil (registered trademark) TA (produced by Reaxa Limited)	Silica gel with triamine group
	PS-1 (produced by Sigma-Aldrich, Inc.)	Ethylenediaminetriacetic acid acetamide, polymer-bound
	PS-2 (produced by Sigma-Aldrich, Inc.)	N,N,N'-Trimethylethylenediamine, polymer-bound
	IXE700F	Inorganic ion exchanger
	Chelating agent	Citric acid

[0075]

Apparatus, and the like used in the following Examples and Comparative Examples are as follows:

(1) Circuit substrate: WALTs-KIT MB50-0102JY_CR from Walts Co., Ltd. Pads are according to CuOSP specifications.

(2) Semiconductor chip: WALTs-TEG MB50-0101JY with 544 bumps constituted with a Cu pillar and solder from Walts Co., Ltd.

(The circuit substrate (1) and the semiconductor chip (2) are connected together to form a daisy chain, and when all the bumps in a chip are connected, the continuity can be established. In other words, if a single bump out of 544 bumps cannot be connected, electrical insulation is recognized by an electrical continuity test.)

[0076]

<Preparation of adhesive composition for underfill sealant>

The relevant components were mixed by the following method to prepare an adhesive composition. Table 2 shows compounds blended in the respective Examples and Comparative Examples and the blending amounts thereof (% by weight).

[0077]

[Table 2]

		Example												Comparative Example			
		1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4
(Meth)acrylic compound	CN120	5	5	5	5	5	5	5	5	5	5	5	10	6	6	5	5
	SR9003	10	10	10	10	10	10	10	10	10	10	10	10	13	11	10	10
	SR480	10	10	10	10	10	10	10	10	10	10	10	10	13	11	10	10
	SR444	10	10	10	10	10	10	10	10	10	10	10	10	13	11	10	10
Maleimide compound	MIA200	5	5	5	5	5	5	5	5	5	5	5	0	0	6	5	5
Coupling agent	KBM-503	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Filler	SE2030	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
Thermal radical initiator	Perbutyl Z	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Metal scavenging agent	QuadraPure TM TU	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	QuadraPure TM IDA	0	5	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	QuadraPure TM BZA	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	0
	QuadraPure TM EDA	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0
	QuadraPure TM BDZ	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0
	QuadraPure TM IMDA Z	0	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0
	QuadraSil TM AP	0	0	0	0	0	0	5	0	0	0	0	0	0	0	0	0
	QuadraSil TM MTU	0	0	0	0	0	0	0	5	0	0	0	0	0	0	0	0
	QuadraSil TM TA	0	0	0	0	0	0	0	0	5	0	0	0	0	0	0	0
	PS-1	0	0	0	0	0	0	0	0	0	5	0	0	0	0	0	0
	PS-2	0	0	0	0	0	0	0	0	0	0	5	5	0	0	0	0
	IXE700F	0	0	0	0	0	0	0	0	0	0	0	0	0	0	5	0
	Chelating agent	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	5
Total		100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100

(The unit of the number is weight %.)

[0078]

<Example 1>

(Preparation of composition)

Compounds listed in Table 2 were weighed out according to the designated blending amounts and kneaded uniformly by a triple roll mill. The product was degassed in vacuum to prepare an adhesive composition A.

[0079]

After heating a circuit substrate in an oven at 120°C for 1 hour, the composition A was applied on a circuit substrate with an autodispenser to obtain a circuit substrate B coated with the adhesive composition A.

[0080]

(Mounting of electronic device)

Immediately after preparation of the circuit substrate B (heat exposure time 0 min), or after being left standing on a hot plate at 80°C for 15 min, 30 min, 45 min, 60 min, or 90 min, the position of a semiconductor chip and the circuit substrate B was adjusted and the two were pressed together using a flip chip bonder equipped with a pulse heat function, followed by thermal compression bonding with pulse heating at 240°C. Thereafter, the composition A was cured in an oven at 150°C for 1 hour to complete an electronic device C.

[0081]

(Electrical continuity test)

The electrical continuity of the above produced electronic device C was examined to find that the electrical continuity was good with respect to any heat exposure time on the hot plate at 80°C (Table 3). Namely, all of the 544 bumps on the semiconductor chip were connected. Therefore, it was demonstrated that the composition in Example 1 maintained liquidity sufficient for processing, even if the same was left standing on a hot plate at 80°C.

[0082]

[Table 3]

Time for being left	Electrical continuity
0 minutes	good
15 minutes	good
30 minutes	good
45 minutes	good
60 minutes	good
90 minutes	good

[0083]

<Examples 2 to 12>

Electronic devices were produced by the same method as in Example 1, except that the components to be blended in the compositions were changed as shown in Table 2. Also in Examples 2 to 12, circuit substrates coated with the compositions were left standing at 80°C for 0 min, 15 min, 30 min, 45 min, 60 min, and 90 min, then electronic devices were produced, and the electrical continuity thereof were examined. As the results, for all the cases, good electrical continuity was obtained. Therefore, it was demonstrated that the compositions in Examples 2 to 12 also maintained liquidity sufficient for processing, even if the same were left standing on a hot plate at 80°C.

[0084]

<Comparative Example 1>

An electronic device was produced by the same method as in Example 1, except that the components to be blended in a composition were changed as shown in Table 2 and a maleimide compound and a metal scavenging agent were not blended. Also in Comparative Example 1, circuit substrates coated with the composition were left standing at 80°C for 0 min, 15 min, 30 min, 45 min, 60 min, and 90 min, then electronic devices were produced, and the electrical continuity thereof were examined. As the results, good electrical continuity of an electronic device produced without being left standing at 80°C (heat exposure time 0 min) was confirmed, however in all other cases, electrical continuity was not established (Table 4). Therefore, it was demonstrated that curing of the composition in Comparative Example 1 had progressed by being left standing at 80°C, and good electrical continuity could not be established.

[0085]

[Table 4]

Time for being left	Electrical continuity
0 minutes	good
15 minutes	unconnected
30 minutes	unconnected
45 minutes	unconnected
60 minutes	unconnected
90 minutes	unconnected

[0086]

<Comparative Example 2>

An electronic device was produced by the same method as in Example 1, except that the components to be blended in a composition were changed as shown in Table 2 and a metal scavenging agent was not blended. Also in Comparative Example 2, the electrical continuity was examined as in Example 1. As the results, good electrical continuity of an electronic device produced without being left standing at 80°C (heat exposure time 0 min) was confirmed, however in all other cases (left standing at 80°C), electrical continuity was not established. It was confirmed that curing of the composition in Comparative Example 2 had also progressed by being left standing at 80°C, and good electrical continuity could not be established.

[0087]

<Comparative Example 3>

An electronic device was produced by the same method as in Example 1, except that the components to be blended in a composition were changed as shown in Table 2 and IXE was used as a metal scavenging agent. Also in Comparative Example 3, the electrical continuity was examined as in Example 1. As the results, good electrical continuity of an electronic device produced without being left standing at 80°C (heat exposure time 0 min) was confirmed, however in all other cases (left standing at 80°C), electrical continuity was not established. It was confirmed that curing of the composition in Comparative Example 3 had progressed by being left standing at 80°C, and good electrical continuity could not be established.

[0088]

<Comparative Example 4>

An electronic device was produced by the same method as in Example 1, except that the components to be blended in a composition were changed as shown in Table 2 and citric acid was used as a metal scavenging agent. Also in Comparative Example 4, the electrical continuity was examined as in Example 1. As the results, good electrical continuity of an electronic device produced without being left standing at 80°C (heat exposure time 0 min) was confirmed, however in all other cases (left standing at 80°C), electrical continuity was not established. It was confirmed that curing of the composition in Comparative Example 4 had progressed by being left standing at 80°C, and good electrical continuity could not be established.

CLAIMS

1. A composition for electronic device comprising:
 - (a) a (meth)acrylic compound and
 - (c) a particle having a functional group having metal scavenging functionality.
2. The composition according to Claim 1, wherein the functional group having metal scavenging functionality is selected from the group consisting of carboxy group, amine group and imidazole group.
3. The composition according to Claim 1 or 2, wherein the particle is porous polystyrene and/or silica gel having one or more functional groups having metal scavenging functionality.
4. The composition according to any one of Claims 1 to 3, further comprising (b) a maleimide compound.
5. The composition according to Claim 4, wherein the maleimide compound comprises a bismaleimide.
6. The composition according to any one of Claims 1 to 5, further comprising a radical initiator.
7. The composition according to any one of Claims 1 to 6, which is used as an underfill sealant.
8. The composition according to any one of Claims 1 to 7, which is used in flip chip mounting.
9. An electronic device comprising a cured product of the composition according to any one of Claims 1 to 8.
10. An electronic appliance comprising the electronic device according to Claim 9.