



(51) International Patent Classification:
A62C 3/00 (2006.01)

(21) International Application Number:

PCT/US2010/054440

(22) International Filing Date:

28 October 2010 (28.10.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/612,797 5 November 2009 (05.11.2009) US

(71) Applicant (for all designated States except US): **FIRE-TRACE USA, LLC** [US/US]; 15690 North 83rd Way, Scottsdale, AZ 85260 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CASHION, Brian, J.** [US/US]; 327 W. Liberty Lane, Gilbert, AZ 85233 (US). **MORAN, Dustin, C.** [US/US]; 6638 W. Via Montoya Drive, Glendale, AZ 85310 (US). **ECKHOLM, William, A.** [US/US]; 9406 E. Sandy Vista Drive, Scottsdale, AZ 85262 (US). **SAMPSON, Matthew** [US/US]; 21320 North 56th Street, Unit 2129, Phoenix, AZ 85054 (US).

(74) Agent: **NEWSON, Gary, W.**; The Noblitt Group, PLLC, 4800 North Scottsdale Road, Suite 6000, Scottsdale, AZ 85251 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR DUAL STAGE HAZARD CONTROL SYSTEM

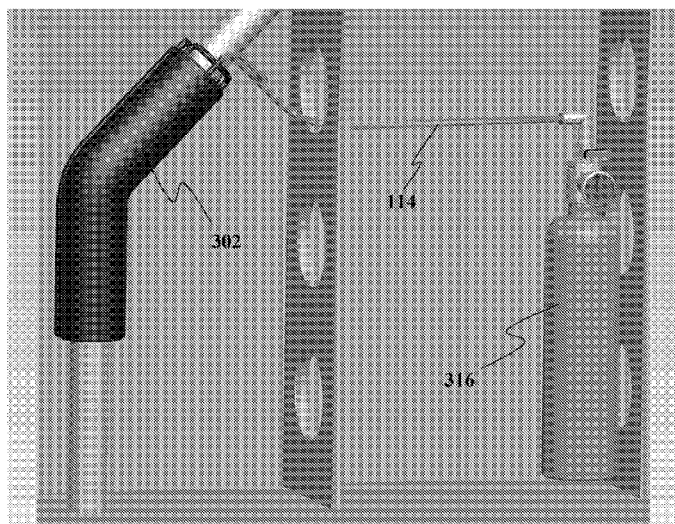


FIGURE 5

(57) Abstract: Methods and apparatus for a dual stage hazard suppression system according to various aspects of the present invention include a housing containing a first hazard control material that is configured to be located close to a hazard source and a container containing a second hazard control material located at a distance from the hazard source. The housing may be configured to release the first hazard control material in response to a breach of the housing and/or the hazard source. The container may be configured for a timed release of the second hazard control material in response to the release of the first hazard control material. Alternatively, a sensor may be used to trigger the release of the second hazard control material in response to a triggering event separate from the initial breach of the housing and/or the hazard source.



Published:

— *with international search report (Art. 21(3))*