




- (51) **International Patent Classification:**
E21B 17/06 (2006.01) *E21B 17/02* (2006.01)
- (21) **International Application Number:**
PCT/US2012/062097
- (22) **International Filing Date:**
26 October 2012 (26.10.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Blvd., Houston, Texas 77072 (US).
- (72) **Inventor; and**
- (71) **Applicant (for US only):** STAUTZENBERGER, Arthur [US/US]; 2701 Hereford Rd., Denton, Texas 76210 (US).
- (74) **Agent:** SCHROEDER, Peter V.; Booth Albanesi Schroeder LLC, 1601 Elm Street, Suite 1950, Dallas, Texas 75201 (US).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** MECHANICALLY ACTUATED DEVICE POSITIONED BELOW MECHANICALLY ACTUATED RELEASE ASSEMBLY UTILIZING J- SLOT DEVICE

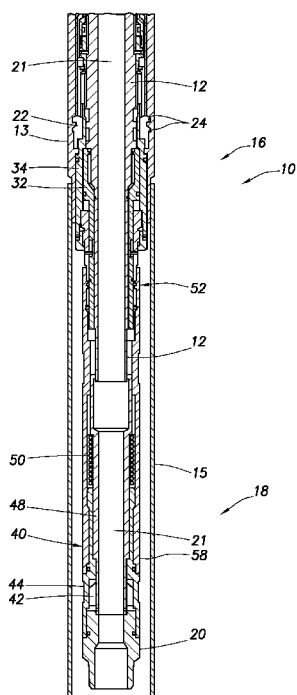

(57) **Abstract:** A tool string carrying an external tool, such as a liner hanger, on a release mechanism is lowered into the wellbore. Interlocking lugs and J-slot profile, defined between the exterior surface of the mandrel and interior surface of the release mechanism, allow relative movement of release mechanism and mandrel without releasing the release mechanism. The relative movement allows mechanical operation of a valve or other tool positioned below the release mechanism. Weight-down and rotation of the tool string and mandrel actuates the lower valve assembly by turning a sleeve into alignment with cooperating members of the mandrel. The sleeve, no longer constrained, moves longitudinally in response to a biasing mechanism. Movement of the sleeve allows closure of the valve. After actuation of the valve tool, further weight-down releases the release mechanism from the carried tool.



Published:

— *with international search report (Art. 21(3))*