


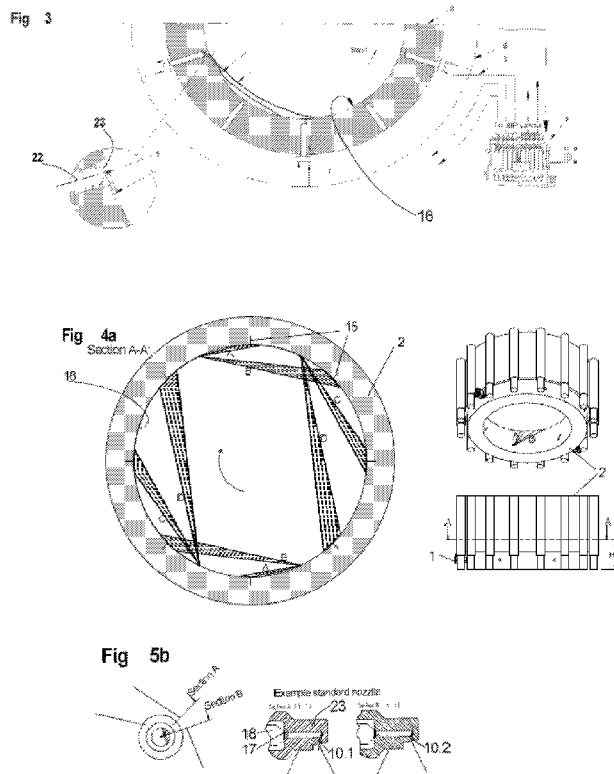

- (51) **International Patent Classification:**
F01M 1/08 (2006.01) *F02F 1/20* (2006.01)
- (21) **International Application Number:**
PCT/DK2012/050088
- (22) **International Filing Date:**
22 March 2012 (22.03.2012)
- (25) **Filing Language:** Danish
- (26) **Publication Language:** English
- (30) **Priority Data:**
PA 2011 70135 22 March 2011 (22.03.2011) DK
- (71) **Applicant (for all designated States except US):** HANS JENSEN LUBRICATORS A/S [DK/DK]; Smedevænget 3, DK-9560 Hadsund (DK).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** BAK, Peer [DK/DK]; Skovbrynet 20, Sulbæk, DK-9300 Sæby (DK).
- (74) **Agent:** PATRADE A/S; Fredens Torv 3A, DK-8000 Aarhus C (DK).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** INJECTION OF CYLINDER LUBRICATING OIL INTO DIESEL ENGINE CYLINDERS

(57) **Abstract:** There is disclosed an injector (1), a method and a dosing system for injecting cylinder lubrication oil in large diesel engine cylinders, e.g. in marine engines. A number of injectors are arranged in a plane perpendicular to the cylinder axis, and each injector includes an injector housing (25) and a nozzle tip (5) provided in continuation of the injector housing, the nozzle tip provided at its outer free end with several nozzle apertures (10) for delivering several lubricating oil jets (A, B, C, D) from each injector onto the cylinder wall (10). In order to perform even distribution of the lubricating oil even if the injectors are not evenly distributed along the periphery of the cylinder, the nozzle apertures are provided under different angles radially relative to a centre line (22) through the nozzle tip as well as axially relative to a plane perpendicular to the centre line of the nozzle tip. Hereby, the centre (15) of the lubricating oil jets (A, B, C, D) will be provided on the cylinder wall at the same level above the injectors but at different areas of the periphery of the cylinder wall.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*